

PCB terminal block - FFKDSA1/V1-7,62- 6 - 1700868

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB terminal block, nominal current: 17.5 A, nom. voltage: 630 V, pitch: 7.62 mm, number of positions: 6, connection method: Push-in spring connection, mounting: Wave soldering, color: green. The article can be aligned to create different nos. of positions!



The figure shows the 10-position version

Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Operation and conductor connection from one direction enable integration into front of device
- ✓ Two solder pins reduce the mechanical strain on the soldering spots
- ✓ The latching on the side enables various numbers of positions to be combined
- ✓ Vertical connection enables multi-row arrangement on the PCB

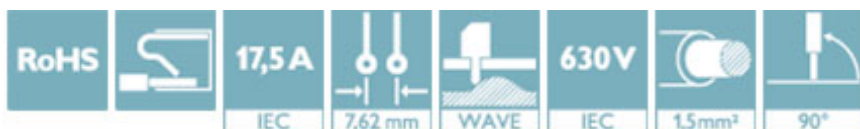

Key Commercial Data

Packing unit	50 pc
GTIN	 4 017918 986322
GTIN	4017918986322

Technical data

Dimensions

Length [l]	12.7 mm
Pitch	7.62 mm
Dimension a	38.1 mm
Width [w]	45.72 mm
Height	13.6 mm
Height [h]	17 mm
Solder pin [P]	3.4 mm
Pin spacing	7.62 mm

PCB terminal block - FFKDSA1/V1-7,62- 6 - 1700868

Technical data

Dimensions

Hole diameter	1.3 mm
---------------	--------

General

Range of articles	FFKDS(A)/V1
Insulating material group	I
Rated voltage (III/2)	630 V
Nominal current I _N	17.5 A
Nominal cross section	1.5 mm ²
Flammability rating according to UL 94	V0
Number of positions	6

Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

cULus Recognized

Ex Approvals

Approval details

cULus Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-19870330		
	D	B
Nominal voltage U _N	300 V	300 V
Nominal current I _N	10 A	10 A
mm ² /AWG/kcmil	22-16	22-16

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>