

24.7W (4.5A), 16.5W (3A), Non-isolated SMT Point Of Load

Features

- ◆ DOSA Compatible Footprint
- ◆ Surface Mountable
- ◆ Constant Switching Frequency
- ◆ Edge Plated Castellations (EPC)
 - Inspectable Solder Joints
- ◆ No external loop tuning components needed
- ◆ Excellent Transient Response



Key Market Segments & Applications




Specifications				
Model		iCF05		iCF12
DC Output Voltage	V	0.6 - 3.63		0.7 - 5.5
DC Input Voltage	V	2.4 - 5.5		4.5 - 14
Efficiency	%	82 - 92		85 - 93.5
Output Voltage Tolerance	%	±3		
Switching Frequency	kHz	600		
Line Regulation	mV	3		3
Load Regulation	mV	6		6
External Load Capacitance	uF	47 - 1000		
Output Ripple and Noise	mVpp	25		15
Overcurrent Protection	A	Hiccup Type		
Remote On / Off	-	Negative Logic (For Positive Logic Contact Factory)		
Remote Sense	-	(+) Sense, compensating up to 0.5V		
Power Good	-	Not available		Yes, Low on fail
Operating Temp	°C	-40 to 115 (see thermal data on website)		
Storage Temperature	°C	-55 to 125		
Safety Agency Approvals	-	UL60950-1, CSA 22.2 No.60950-1-03; VDE CB scheme (IEC60950-1, EN60950-1)		
Weight	g / oz	1.5g / 0.53 oz		
Size (LxWxH)	mm / in.	12.2 x 12.2 x 4.45 / 0.48 x 0.48 x 0.175		
Warranty	yrs	3 years		

Model Selector

Model	Input Voltage (V)	Output Current (A)	Output Voltage (V)	Positive Logic On/Off	Negative Logic On/Off	Sequencing	Solder Bumping
iCF05003A006V-001-R	2.4 - 5.5	3	0.60 - 3.63	-	X	X	EPC
iCF05003A006V-003-R	2.4 - 5.5	3	0.60 - 3.63	-	X	-	EPC
iCF05003A006V-006-R	2.4 - 5.5	3	0.60 - 3.63	X	-	-	LGA
iCF05003A006V-007-R	2.4 - 5.5	3	0.60 - 3.63	-	X	-	LGA
iCF12003A007V-003-R	4.5 - 14	3	0.70 - 5.5	-	X	-	EPC
iCF12003A007V-007-R	4.5 - 14	3	0.70 - 5.5	-	X	-	LGA
iCF12005A007V-006-R	4.5 - 14	5	0.70 - 5.5	X	-	-	LGA
iCF12005A007V-007-R	4.5 - 14	5	0.70 - 5.5	-	X	-	LGA

Preferred Model

Outline Drawing (EPC Type)

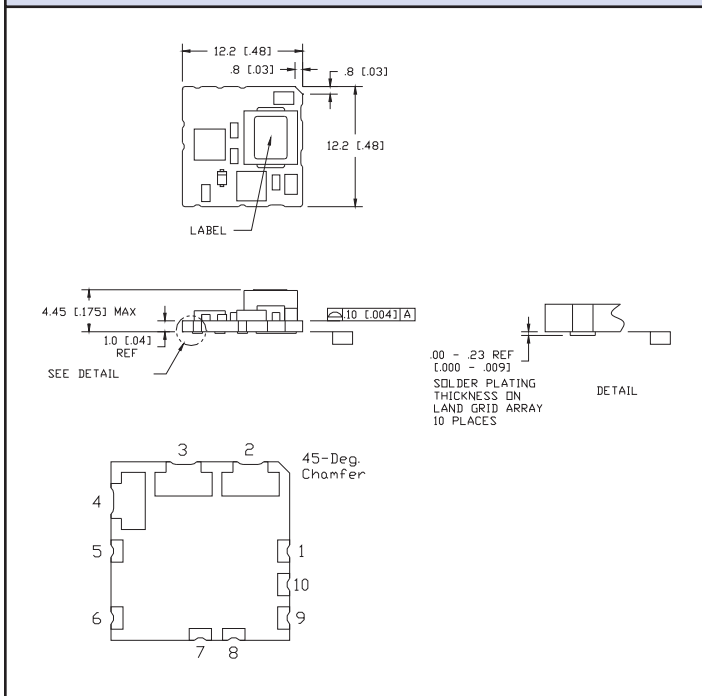

Pinout

PIN	Function	PIN	Function
1	ON / OFF	6	TRIM
2	VIN	7	GND
3	GND	8	no connection
4	VOUT	9	no connection
5	SENSE	10	PWR GOOD

Other Industrial Products

CC-E	1.5 - 30W 5, 12, 24 or 48V input isolated DC-DC converters
PX	10 - 60W 12, 24 or 48V input isolated DC-DC converters
iAF, iBF, iCG	6 - 20A DOSA2 non isolated DC-DC converters

For Additional Information, please visit
us.tdk-lambda.com/lp/products/icf-series.htm

