

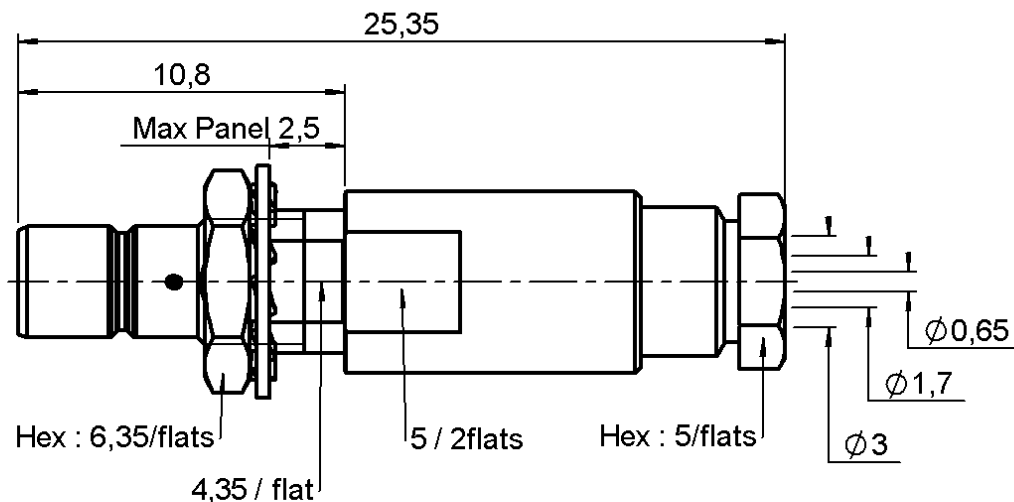



STRAIGHT BULKHEAD JACK CLAMP TYPE
R114.305.000
REAR MOUNT - CABLE 2.6/50+75 S

Series : SMB


PANEL CUT OUT


mm		
	Maxi	mini
A	5	4.9
B	4.55	4.45

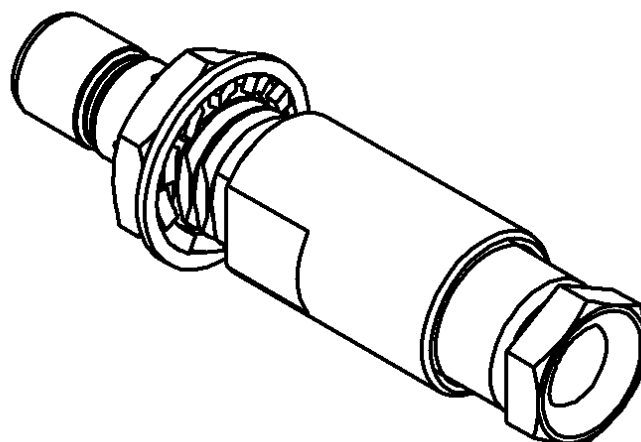

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING
BODY	BRASS	GOLD 0.2 OVER NICKEL 2 μ m
CENTRE CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2 μ m
OUTER CONTACT	-	- μ m
INSULATOR	PTFE	
GASKET	-	
OTHERS PARTS	BRASS	GOLD 0.2 OVER NICKEL 2 μ m
-	-	-
-	-	-



Edition : 9850 H

Design changes may be in order to improve the product.

STRAIGHT BULKHEAD JACK CLAMP TYPE**R114.305.000****REAR MOUNT - CABLE 2.6/50+75 S**Series : **SMB****ELECTRICAL CHARACTERISTICS**

Impedance	50 Ω
Frequency	0-4 GHz
VSWR	1.25 + 0.040 x F(GHz) Maxi
Insertion loss	0.25 √F(GHz) dB
RF leakage	- (57 - F(GHz)) dB mini
Operating temperature	-65/+165 ° C
Voltage rating	335 Veff Maxi
Dielectric withstanding	1000 Veff mini
Insulation resistance	1000 MΩ mini

SPECIFICATION

Stripping	a	b	c	d	e	f
mm	2.50	0.00	4.50	4.50	1.20	0.00

Assembly instruction :

Recommended cables

RG 316

RG 179

KX 22A

RG 188

RG 187

Cable retention

- pull off **110** N mini- torque **NA** N.cm**MECHANICAL CHARACTERISTICS**

Centre contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini

TOOLING

Part Number	Description	Hexagon
.	.	.

Recommended torque

Mating	NA N.cm
Panel nut	60 N.cm
Clamp nut	40 N.cm
A/F clamp nut	5.000 mm

Mating life	500 Cycles mini
Weight	3.000 g

OTHERS CHARACTERISTICS

-

ENVIRONMENTAL

Hermetic seal	NA Atm.cm3/s
Leakage – pressurised only	NA Mpa

Edition : **9850 H**

Design changes may be in order to improve the product.