

- NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATED.
CONTACT - BERYLLIUM COPPER, SILVER PLATED
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM

3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C

4. CONNECTOR IS IP-67 RATED IN MATED CONDITION
- THIRD ANGLE PROJ.
- REV

DESCRIPTION

DATE

ECO

APPR

B

SEE SHEET 1

20-Aug-04

C

SEE SHEET 1

01-Sep-04

D

SEE SHEET 1

13-Apr-06

SH

Y

REDRAWN TO UPDATE FORMAT/RD-DM10031001T1

17-Mar-10

47700

SH

AA

STAMP "AMPHENOL" WAS "74868"\RD-DM11120601R3

26-Dec-11

48845

SH



AB

ADDED NOTE 4

28-Feb-14

49899

SH

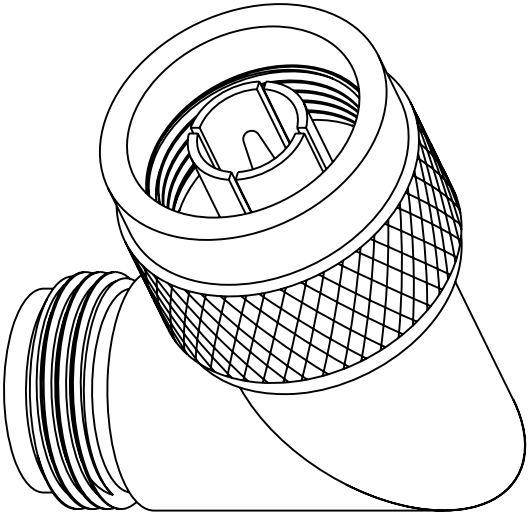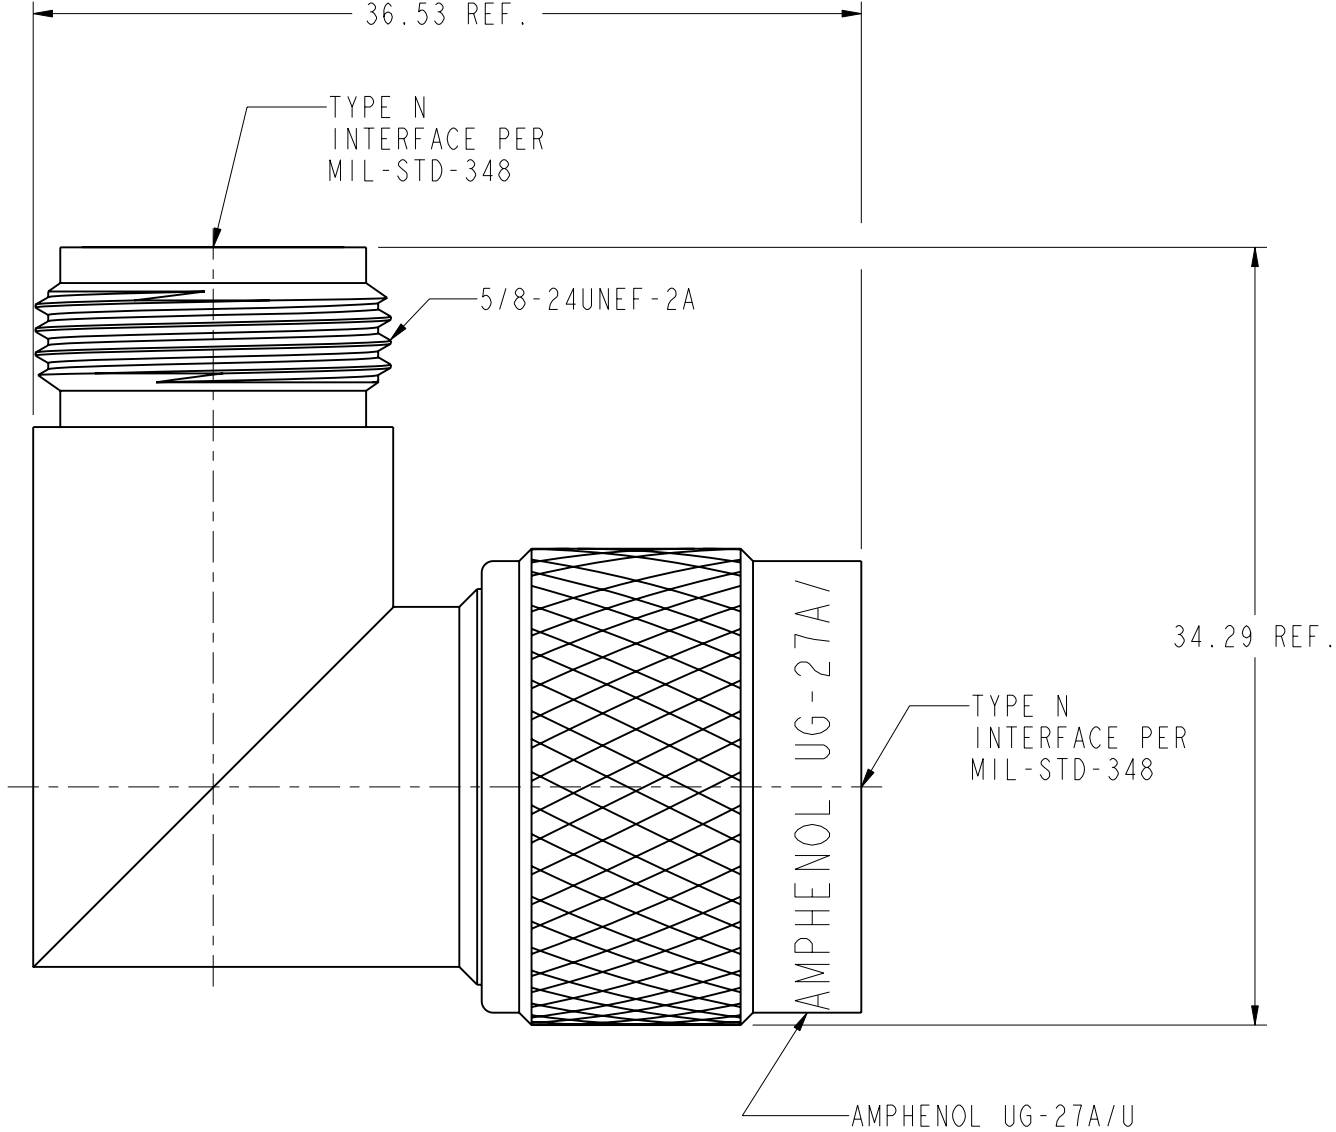

SCALE 2.000

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL		DRAWN		DATE		TITLE		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
	-		S.DUAN		28-Feb-14					
	REFERENCE		ENGINEER		DATE		TYPE 'N' ADAPTOR RIGHT ANGLE UG-27A/U		DRAWING NO.82-64	
			S.P		07-Mar-66				ITEM NO.82-64	
	FINISH		APPROVED		DATE		SCALE: 3.0:1.0		SHEET 2 OF 2	
S.HSIEH			28-Feb-14		DWG SIZE		REV			
		CAD FILE				B		AB		PART NO.82-64
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data.										