

## Device connector, front mounting - CA-06S1N8A2S00 - 1619991

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector for front wall, straight, shielded: Yes, SPEEDCON locking, M23, Number of positions: 6, Type of contact: Socket, Crimp connection, Flat gasket, 4x Ø3.2

### Product Features



### Key commercial data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Weight per Piece (excluding packing) | 20.0 GRM |
| Custom tariff number                 | 85366990 |
| Country of origin                    | Germany  |

### Technical data

#### Temperature range

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

#### Data of the insulating body

|                                                    |                                                          |
|----------------------------------------------------|----------------------------------------------------------|
| Note                                               | Order information Order crimp contacts Ø 2 mm separately |
| Insulator material                                 | PA 66                                                    |
| Direction of rotation of contact chamber numbering | Standard                                                 |
| Coding                                             | N                                                        |
| Contact connection method                          | Crimp connection                                         |
| Type of contacts                                   | Socket                                                   |
| Number of positions                                | 6                                                        |
| Contact diameter of power contacts                 | 2 mm                                                     |
| Nominal current per power contact at 25°C          | 20 A                                                     |
| Nominal voltage, power contact                     | 300 V                                                    |
| Surge voltage category                             | II                                                       |

## Device connector, front mounting - CA-06S1N8A2S00 - 1619991

### Technical data

#### Data of the insulating body

|                  |   |
|------------------|---|
| Pollution degree | 3 |
|------------------|---|

#### Housing data

|                                        |                                                                      |
|----------------------------------------|----------------------------------------------------------------------|
| Housing material                       | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Type of locking                        | SPEEDCON locking                                                     |
| Degree of protection (when plugged in) | IP67                                                                 |
| Thread type                            | M23                                                                  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002635 |
| ETIM 5.0 | EC002635 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11     | 43172015 |
| UNSPSC 12.01  | 43201404 |
| UNSPSC 13.2   | 43201404 |

### Approvals

#### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

Device connector, front mounting - CA-06S1N8A2S00 - 1619991

Approvals

Ex Approvals

Approvals submitted

Approval details


|                                                                                                 |       |
|-------------------------------------------------------------------------------------------------|-------|
| UL Recognized  |       |
| mm²/AWG/kcmil                                                                                   | 14    |
| Nominal current IN                                                                              | 17 A  |
| Nominal voltage UN                                                                              | 300 V |

|                                                                                                    |       |
|----------------------------------------------------------------------------------------------------|-------|
| cUL Recognized  |       |
| mm²/AWG/kcmil                                                                                      | 14    |
| Nominal current IN                                                                                 | 10 A  |
| Nominal voltage UN                                                                                 | 300 V |


|                                                                                                      |  |
|------------------------------------------------------------------------------------------------------|--|
| cULus Recognized  |  |
|------------------------------------------------------------------------------------------------------|--|

Drawings

Schematic diagram




Dimensional drawing

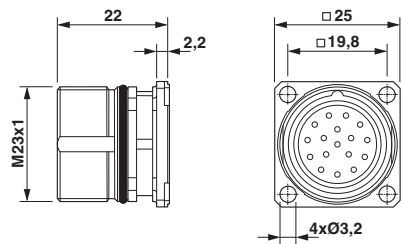

## Device connector, front mounting - CA-06S1N8A2S00 - 1619991

Dimensional drawing

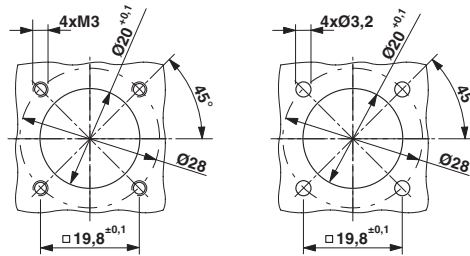

### Installation dimensions

Phoenix Contact 2015 © - all rights reserved  
<http://www.phoenixcontact.com>