



Features

- Cover Kit for use with ABC/MBC300 Series
- Non-corrosive
- Easy assembly
- Low weight
- Fully safe
- Access for AC and DC connectors

SPECIFICATIONS FOR COVER-300-XBC


Derating Guidelines ABC/MBC300: Ambient > 30°C, derate by 1.3 W/°C to 40°C. 25 CFM recommended to circulate air

Kit Contents Mounting Base, Cover, Insulator, Fixing Screws

Mechanical Dimensions 133.7 x 85.3 x 44.5 mm

Cover and Base Material EG (Zintec) / CRC (Powder coating/Passivation), 1.0 mm

All dimensions are in mm. General tolerance: +/-0.5

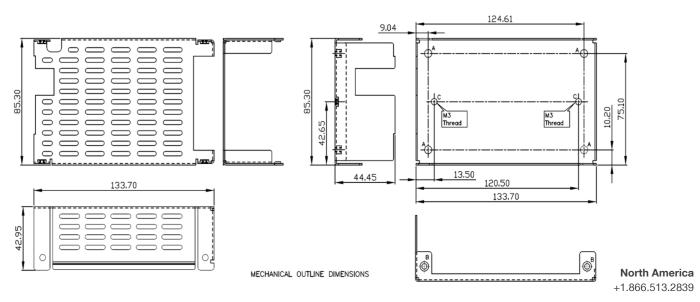

Asia-Pacific +86.755.29885888

Europe, Middle East +353 61 225 977

tech.support@psbel.com belpowersolutions.com

