

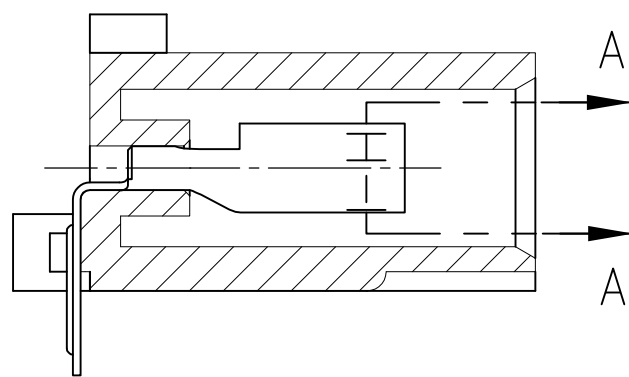
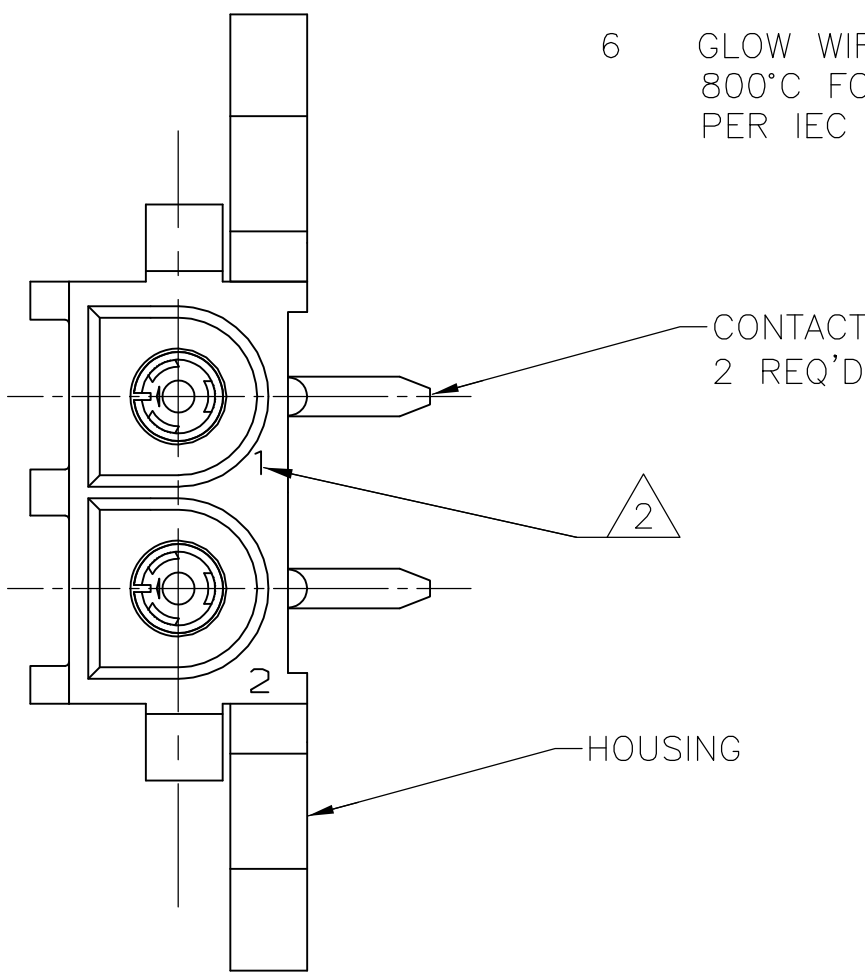
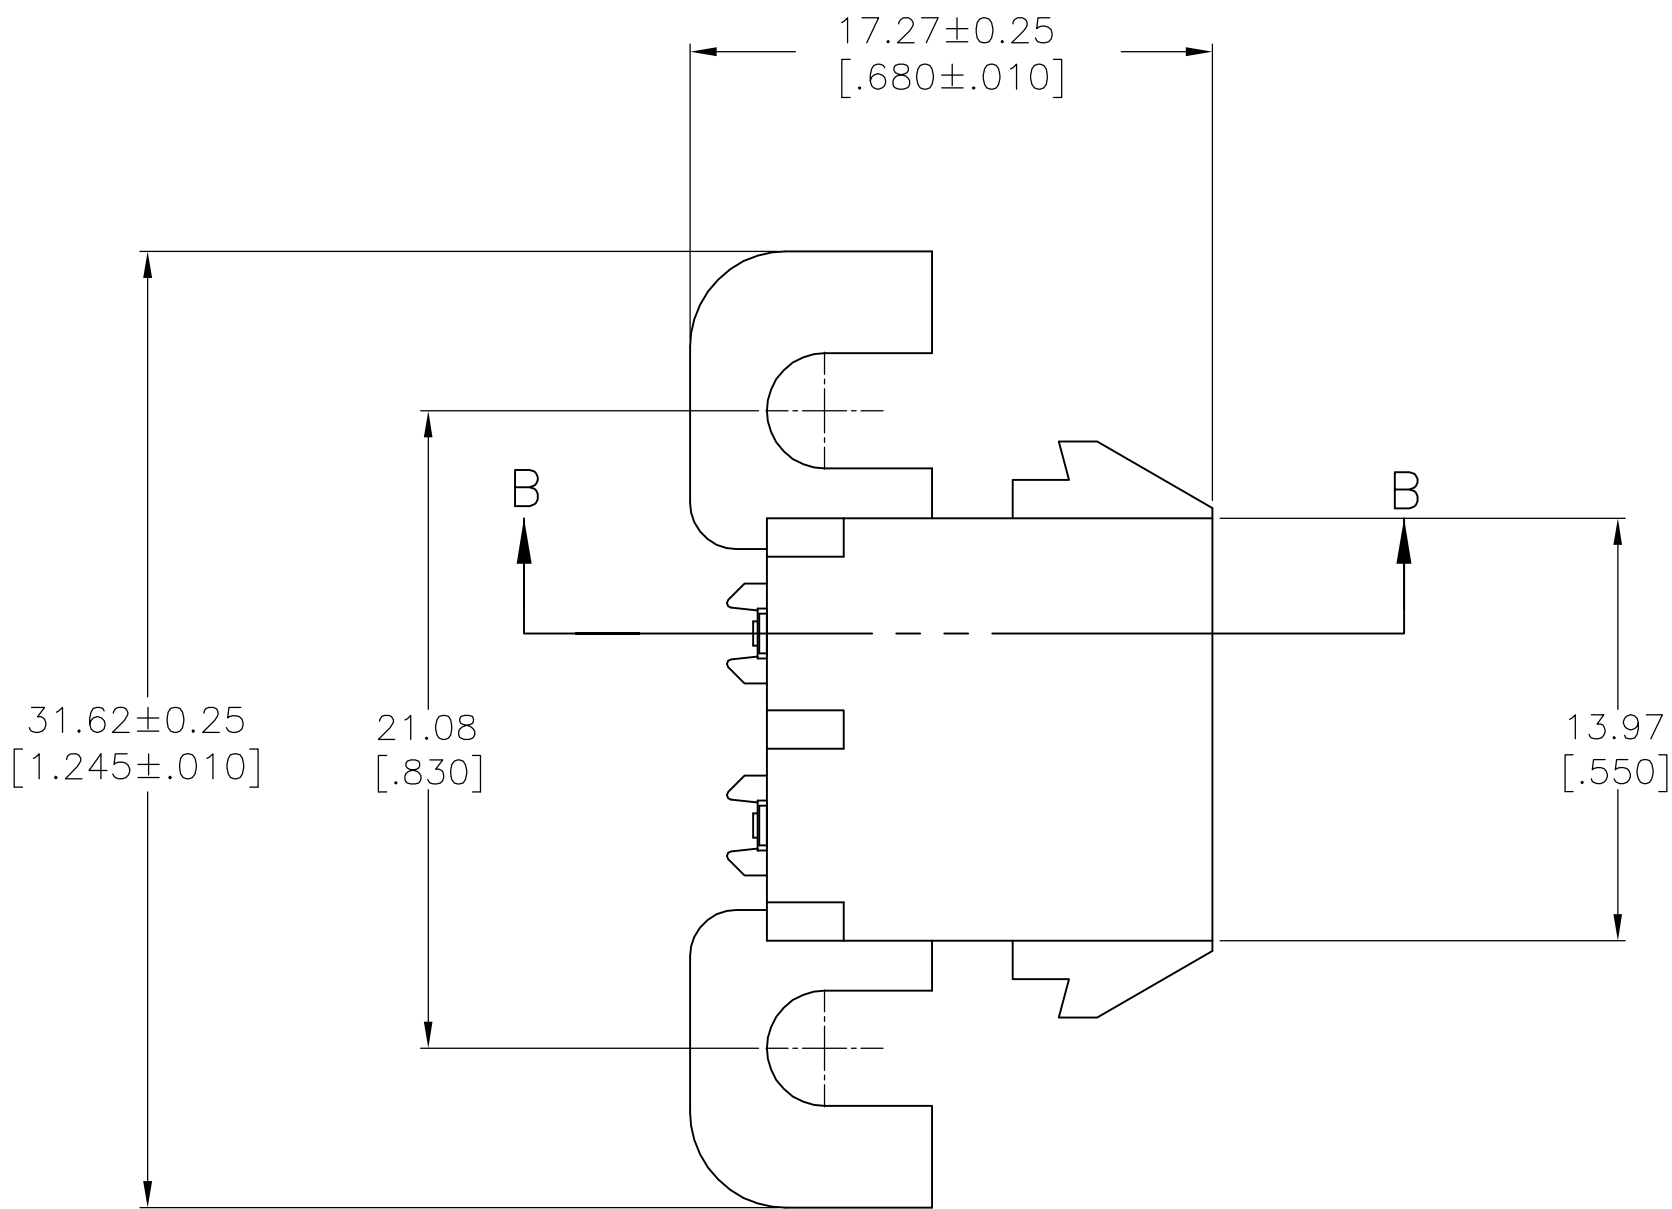


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		REVISED PER ECR-16-002640	10MAR2016	BW	EW


- 1
- PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
- 2
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 3
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4
- FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- 5
- GLOW WIRE FLAMMABILITY (GWFI): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- 6
- GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

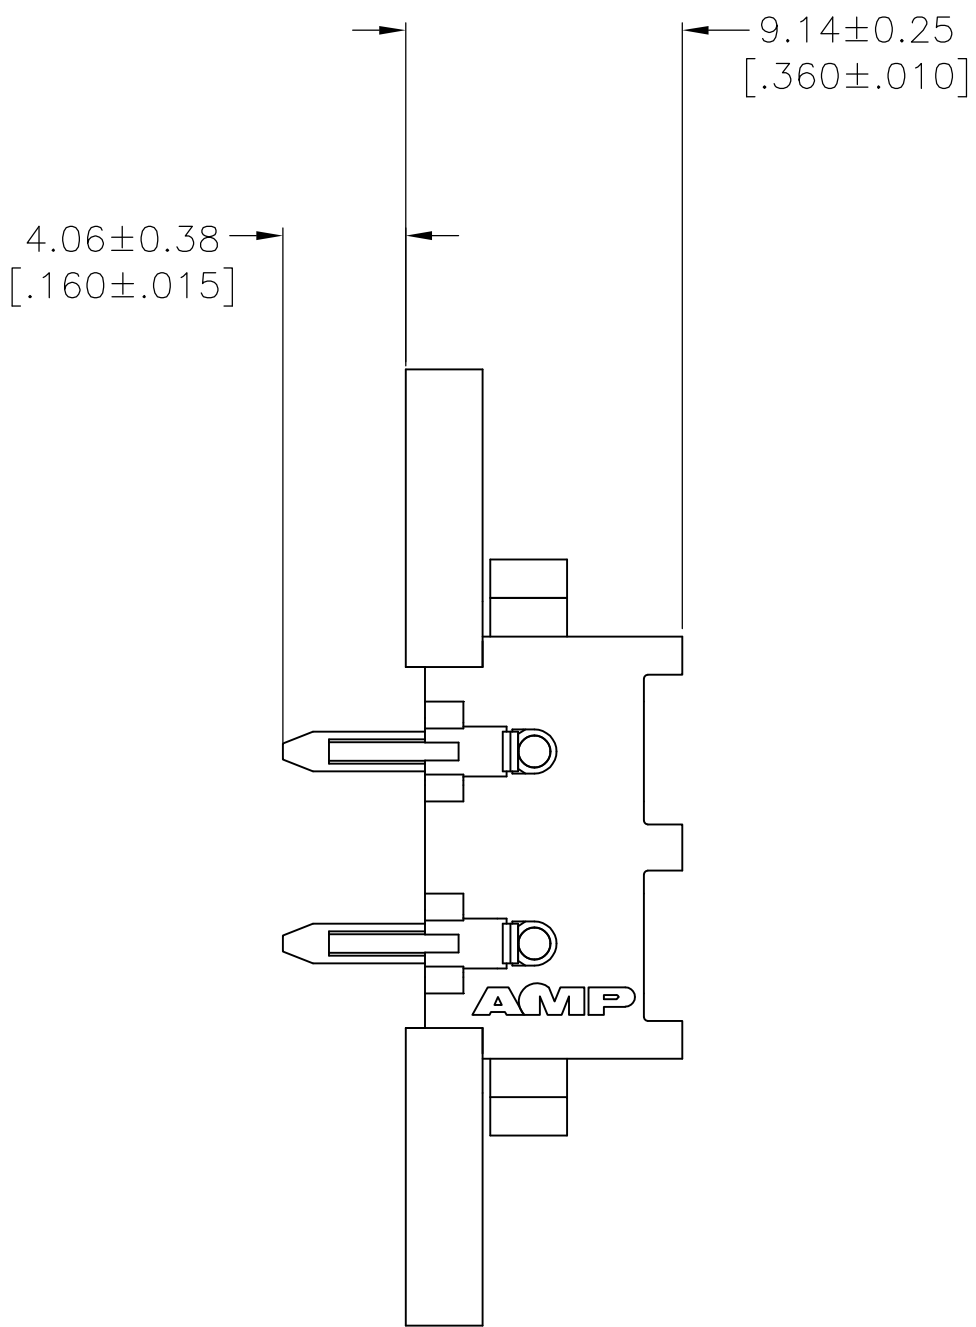


SECTION B—B

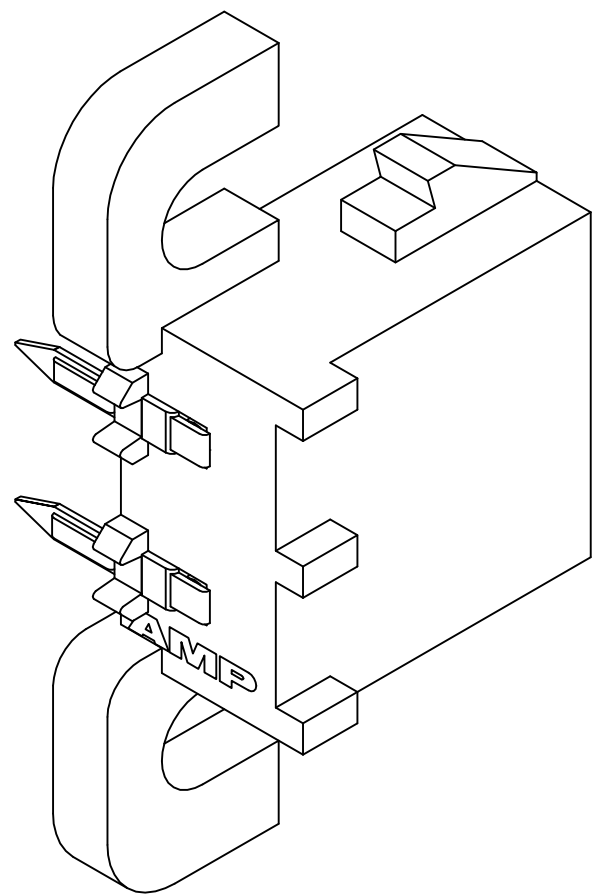

3-DIMENSIONAL MODEL
NTS

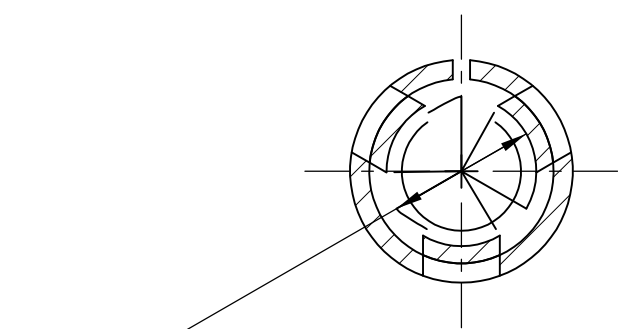

SECTION A—A
SCALE 10:1

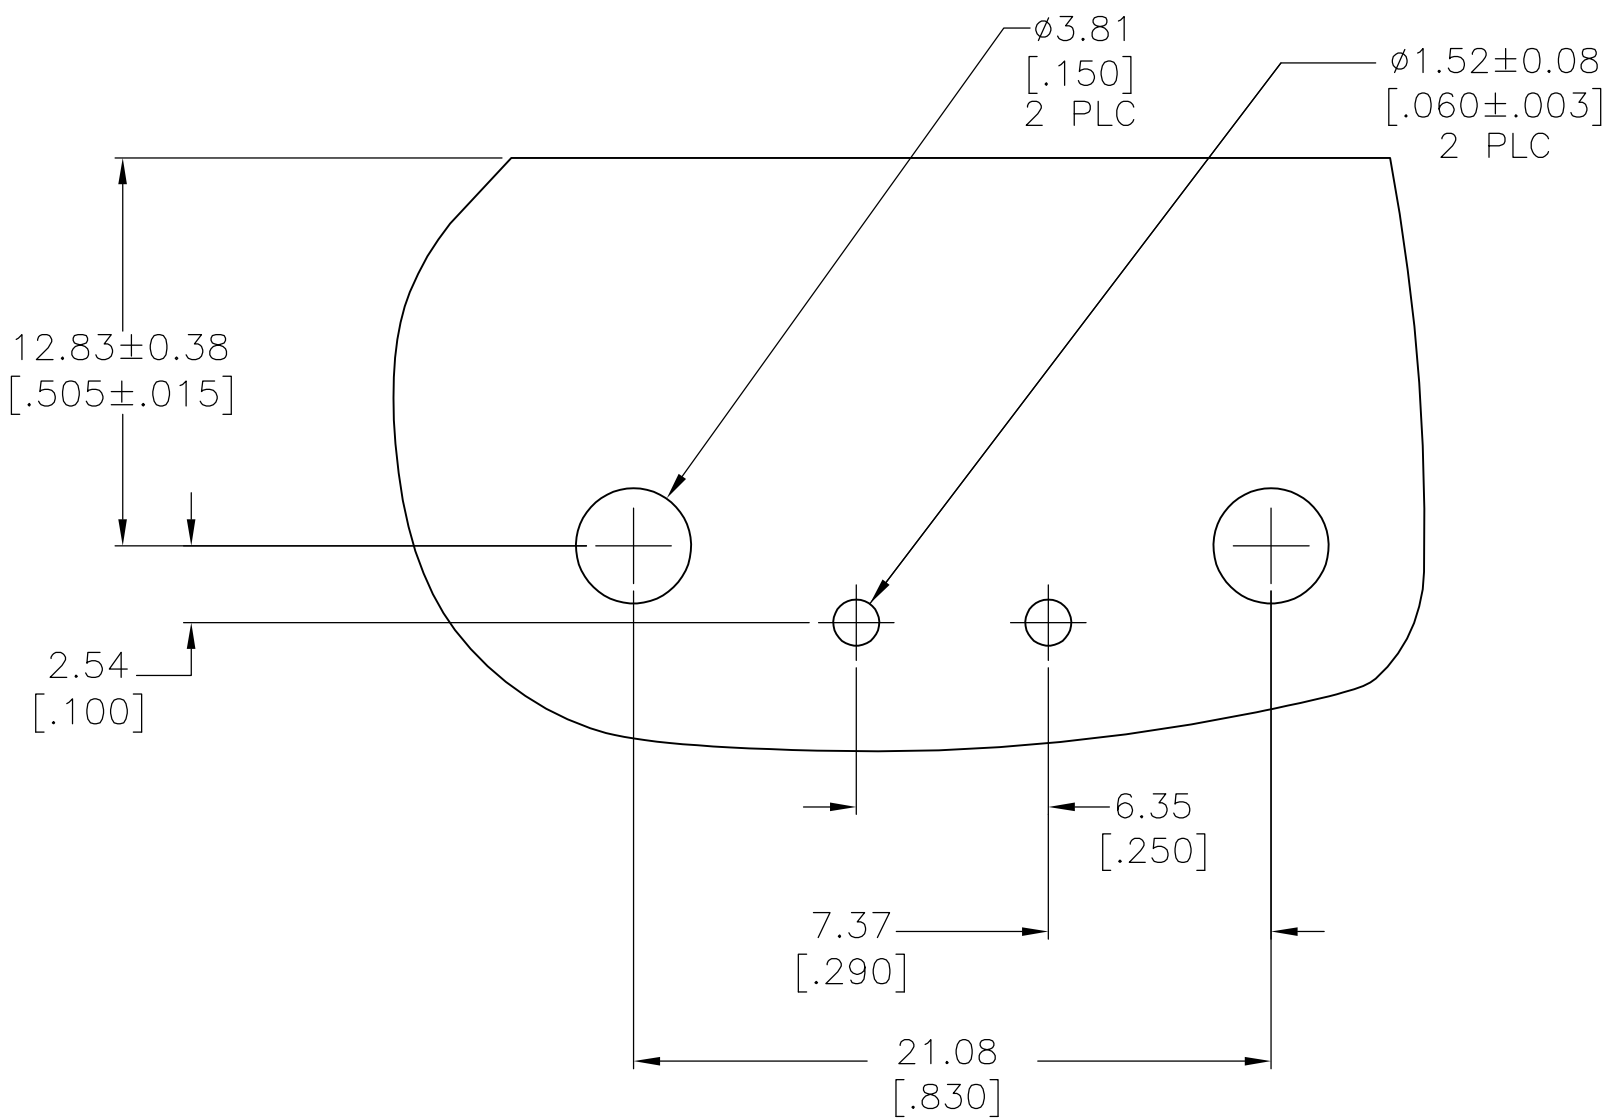

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57[.062] THICK P.C. BOARD

PH BRZ TIN	NYLON UL V-0 GW	1969797-1
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD 26DEC2015	TE Connectivity	
		CHK WICKES, EVAN 26DEC2015		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD WICKES, EVAN 26DEC2015	NAME	
		PRODUCT SPEC	SOCKET HEADER ASSEMBLY, RIGHT ANGLE MOUNT, 2 POSITION, UNIVERSAL MATE-N-LOK(TM)	
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± - ± -	APPLICATION SPEC	SIZE	CAGE CODE
		—	A1	00779
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT —	DRAWING NO 1969797	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1	OF 1
		REV A		