

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

---

LOC

DIST

REVISIONS

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

GP

00

P

LTR

DESCRIPTION

DATE

DWN

APVD

A

INITIAL RELEASE

25MAY2015

TB


AVZ

TE PN

2829491-1

NOTES:

- 1 EACH ITEM AND ASSEMBLY MUST COMPLY WITH EUROPEAN REDUCTION OF HAZARDOUS SUBSTANCES (RoHS) REGULATION. UNDER DIRECTIVE 2011/65/EU.
- 2 DO NOT SOLDER CONTACT, CRIMP ONLY
- 3 IDENTIFY POSITION PE, LOADING POSITIONER PE TO SOCKET PE
- 4 PE CONTACT CIRCUIT IDENTIFIED BY EXTENDED LENGTH POLARIZED "KEY"
- 5 ELECTRICAL TEST:  
100% OPEN SHORT&MISS WIRE TEST  
CONTACT RESISTANCE: 2 OHM MAX

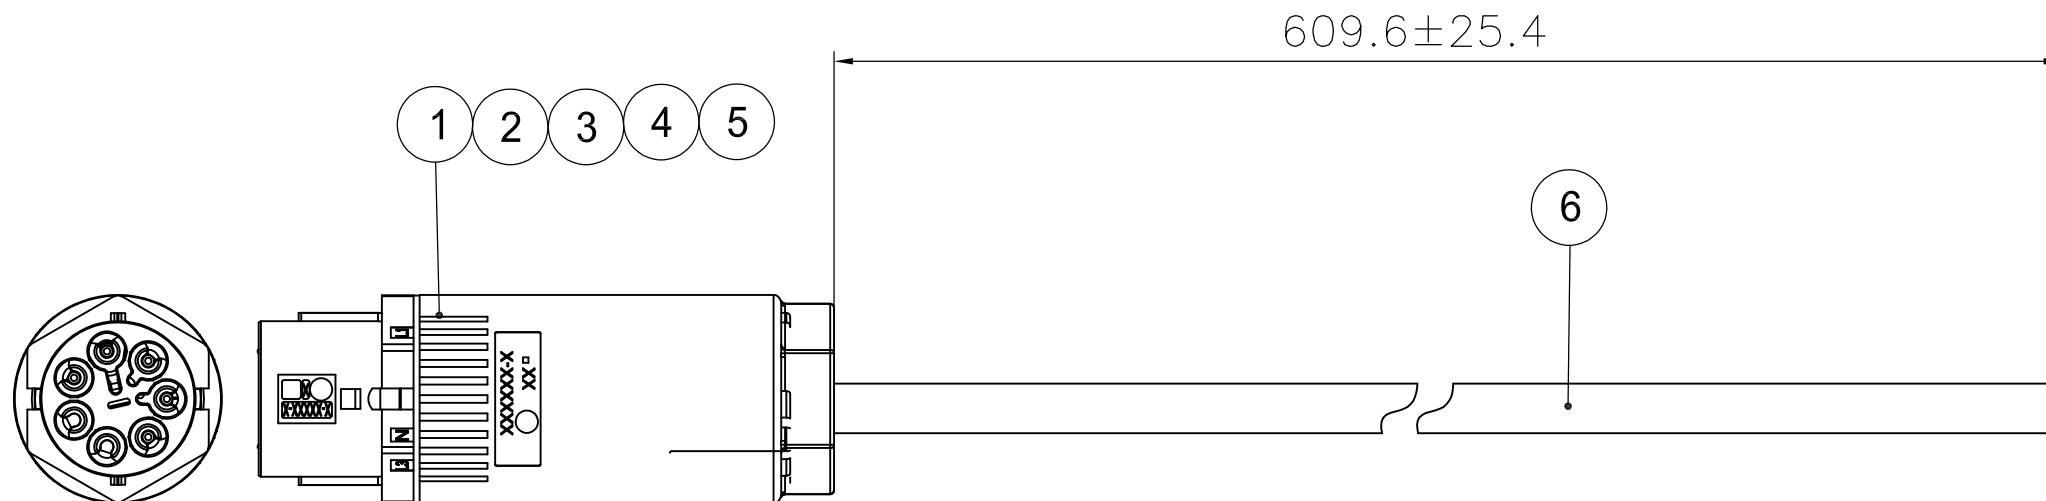


CONNECTOR 1

WIRE DIAGRAM

CONNECTOR 1	WIRE COLOR
L1	BLACK
N	WHITE
L3	
S2	RED
S1	ORANGE
L2	
PE	GREEN

AR	M	DESCRIPTION	ITEM
		14/5, Cable standard UL (SOUTHWIRE: SE00W 14/5C BLACK)	6
1	PC	Cable Ring Nut 14-17mm OD	5
1	PC	Cable Clamp/Seal Assembly 14-17mm OD	4
1	PC	Contact/Positioner Assembly	3
5	PC	14 AWG Pin Contacts	2
1	PC	Pin Housing Assembly 5 POS. A CODING	1
-1	UoM		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.BURZYŃSKI 25MAY2015	 TE Connectivity	
DIMENSIONS: mm		CHK A.V.ZANDVOORT 25MAY2015		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.V.ZANDVOORT 25MAY2015	NAME SEALED 567 POS PIN - STD UL	
0 PLC ± 0,5 1 PLC ± 0,5 2 PLC ± 0,5 3 PLC ± - 4 PLC ± - ANGLES ± 2		PRODUCT SPEC -	-	
MATERIAL -		FINISH -	APPLICATION SPEC -	RESTRICTED TO -
		WEIGHT -	SIZE A3	CAGE CODE 00779
		DRAWING NO C-2829491		SCALE NTS
		CUSTOMER DRAWING		SHEET 1 OF 1
				REV A