


- | | | | | | | | |
|---|--------------------------|-------|-------|-------|-----------------------|-----------------------|-----------------------|
| | | 3.984 | 3.900 | 39 | 40 | 4-103148-0 | |
| | OBSOLETE | 3.884 | 3.800 | 38 | 39 | 3-103148-9 | |
| | | 3.784 | 3.700 | 37 | 38 | 3-103148-8 | |
| | | 3.684 | 3.600 | 36 | 37 | 3-103148-7 | |
| 5 | SUPERSEDED BY 8-146304-6 | | 3.584 | 3.500 | 35 | 36 | 3-103148-6 |
| | OBSOLETE | 3.484 | 3.400 | 34 | 35 | 3-103148-5 | |
| | | 3.384 | 3.300 | 33 | 34 | 3-103148-4 | |
| | | 3.284 | 3.200 | 32 | 33 | 3-103148-3 | |
| | | 3.184 | 3.100 | 31 | 32 | 3-103148-2 | |
| | | 3.084 | 3.000 | 30 | 31 | 3-103148-1 | |
| | | 2.984 | 2.900 | 29 | 30 | 3-103148-0 | |
| | | 2.884 | 2.800 | 28 | 29 | 2-103148-9 | |
| | | 2.784 | 2.700 | 27 | 28 | 2-103148-8 | |
| | | 2.684 | 2.600 | 26 | 27 | 2-103148-7 | |
| | 2.584 | 2.500 | 25 | 26 | 2-103148-6 | | |
| 5 | SUPERSEDED BY 7-146304-5 | | 2.484 | 2.400 | 24 | 25 | 2-103148-5 |
| | OBSOLETE | 2.384 | 2.300 | 23 | 24 | 2-103148-4 | |
| | | 2.284 | 2.200 | 22 | 23 | 2-103148-3 | |
| | | 2.184 | 2.100 | 21 | 22 | 2-103148-2 | |
| | | 2.084 | 2.000 | 20 | 21 | 2-103148-1 | |
| | | 1.984 | 1.900 | 19 | 20 | 2-103148-0 | |
| | | 1.884 | 1.800 | 18 | 19 | 1-103148-9 | |
| | | 1.784 | 1.700 | 17 | 18 | 1-103148-8 | |
| | | 1.684 | 1.600 | 16 | 17 | 1-103148-7 | |
| | | 1.584 | 1.500 | 15 | 16 | 1-103148-6 | |
| | OBSOLETE | 1.484 | 1.400 | 14 | 15 | 1-103148-5 | |
| | | 1.384 | 1.300 | 13 | 14 | 1-103148-4 | |
| | | 1.284 | 1.200 | 12 | 13 | 1-103148-3 | |
| 5 | SUPERSEDED BY 6-146304-2 | | 1.184 | 1.100 | 11 | 12 | 1-103148-2 |
| | OBSOLETE | 1.084 | 1.000 | 10 | 11 | 1-103148-1 | |
| | | .984 | .900 | 9 | 10 | 1-103148-0 | |
| 5 | SUPERSEDED BY 5-146304-9 | | .884 | .800 | 8 | 9 | 103148-9 |
| | OBSOLETE | .784 | .700 | 7 | 8 | 103148-8 | |
| | | .684 | .600 | 6 | 7 | 103148-7 | |
| | | .584 | .500 | 5 | 6 | 103148-6 | |
| | OBSOLETE | .484 | .400 | 4 | 5 | 103148-5 | |
| | | .384 | .300 | 3 | 4 | 103148-4 | |
| | | .284 | .200 | 2 | 3 | 103148-3 | |
| | OBSOLETE | .184 | .100 | 1 | 2 | 103148-2 | |
| | | .084 | — | — | 1 | 103148-1 | |
| | | C | B | A | NO
OF
POSN | PART
NUMBER | |

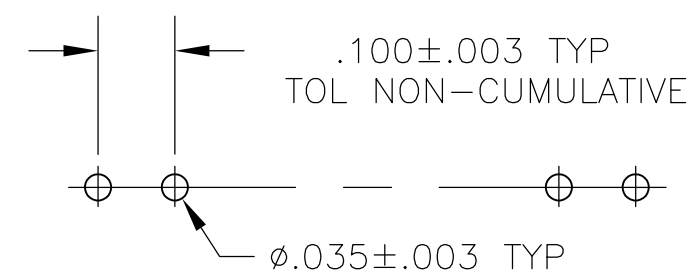

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL		230CT87		 TE Connectivity		
		CHK T. CLARK		230CT87				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. CLARK		NAME		
		0 PLC ± —		PRODUCT SPEC		HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, RIGHT ANGLE, WITH .025 SQ POSTS		
		1 PLC ± —		—				
		2 PLC ± —		APPLICATION SPEC				
		3 PLC ± .005		—				
4 PLC ± —		4 ANGLES ± —		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		FINISH - POSTS		WEIGHT		A2 00779 C-103148		—
HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK		.000030 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER		—		SCALE 4:1		SHEET 1 of 1
POSTS: COPPER ALLOY		.000500 NICKEL		CUSTOMER DRAWING		REV C		