


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		INITIAL DRAWING	26AUG2015	DM	DM

- NOTES:
- EACH ITEM AND ASSEMBLY MUST COMPLY WITH EUROPEAN REDUCTION OF HAZARDOUS SUBSTANCES (RoHS) REGULATION. UNDER DIRECTIVE 2011/65/EU AND HARMONIZED STANDARD EN 50581:2012.
 - DO NOT SOLDER CONTACT, CRIMP ONLY
 - IDENTIFY POSITION PE, LOADING POSITIONER PE TO SOCKET PE
 - PE CONTACT CIRCUIT IDENTIFIED BY EXTENDED LENGTH POLARIZED "KEY"
 - ELECTRICAL TEST:
100% OPEN SHORT&MISS WIRE TEST
CONTACT RESISTANCE: 2 OHM MAX

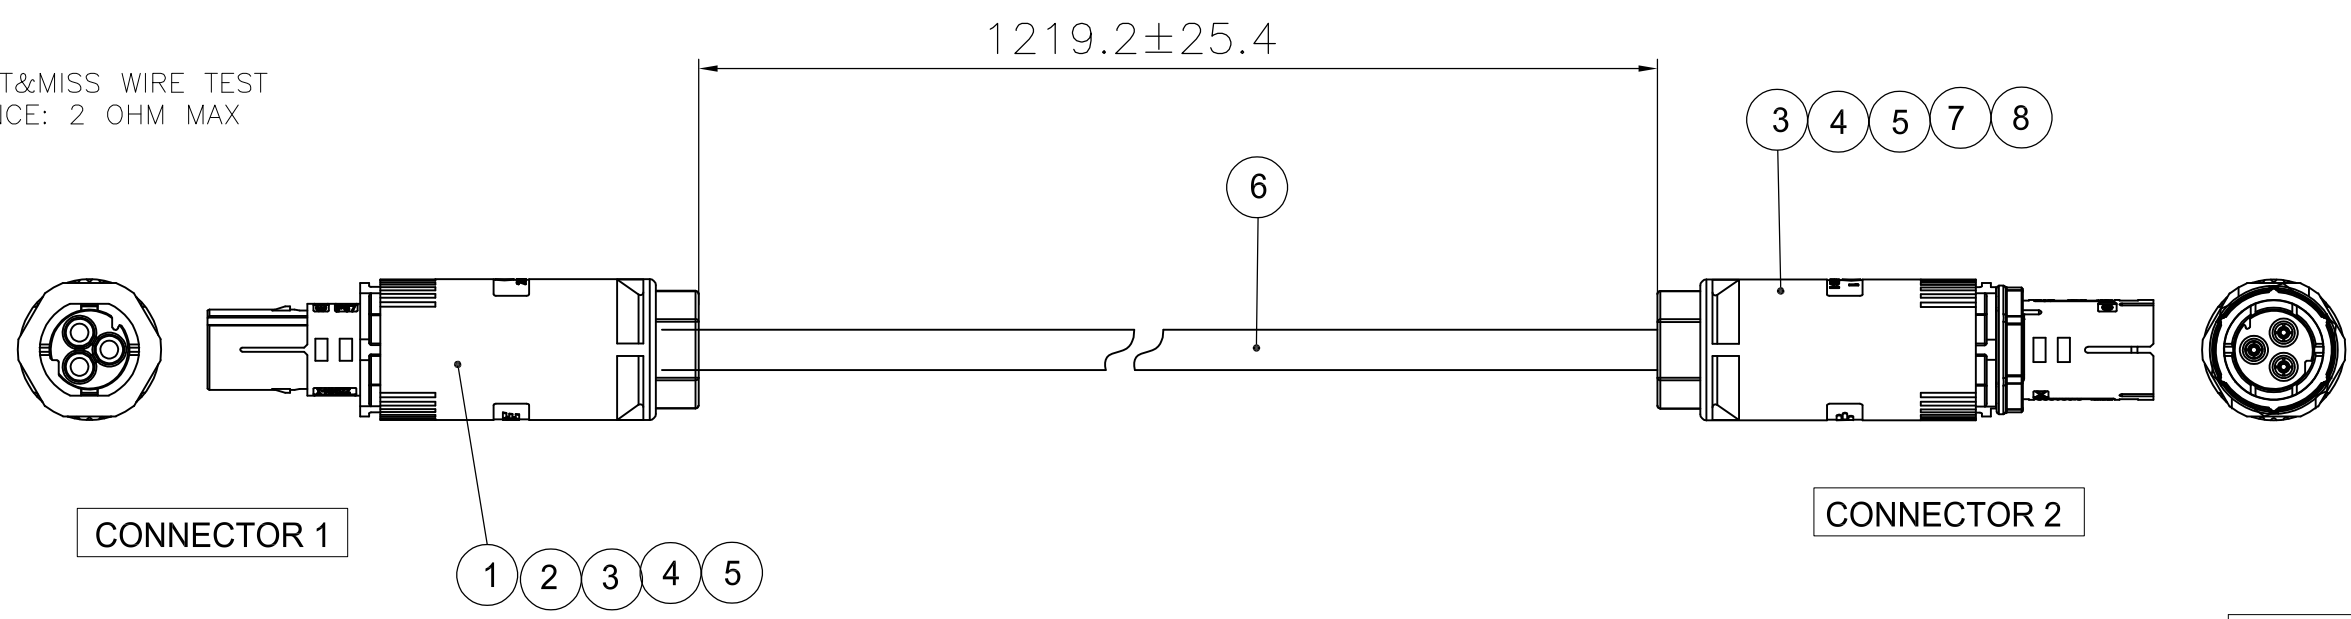

2829460-1
TE P/N

WIRING SCHEME	
CONNECTOR HOUSING (ITEM 1 and 7)	WIRE
PN/⊥	GREEN/YELLOW
N	BLUE
L	BROWN

QTY	UoM	DESCRIPTION	ITEM
3	PC	Socket Contacts, 2.5mm	8
1	PC	Socket Housing Assembly	7
AR	M	Cable, H07RN-F, 14/3 Black, 10.9-14.0mm OD (Mueller 4101403)	6
2	PC	Cable Ring Nut 11-14mm OD	5
2	PC	Cable Clamp/Seal Assembly 11-14mm OD	4
2	PC	Contact/Positioner Assembly	3
3	PC	Pin Contacts 2.5mm	2
1	PC	Pin Housing Assembly	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.BURZYŃSKI 25MAY2015	STE TE Connectivity	
DIMENSIONS: mm		CHK A.V.ZANDVOORT 25MAY2015		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.V.ZANDVOORT 25MAY2015	NAME SEALED 3 POS PIN TO SEALED 3 POS SOCKET - STD HARMONIZED	
0 PLC ± 0,5 1 PLC ± 0,5 2 PLC ± 0,5 3 PLC ± - 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC -	SIZE A3	
MATERIAL -		FINISH -	CAGE CODE 00779	DRAWING NO C-2829460
		WEIGHT -	RESTRICTED TO -	
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1
			REV B	