

PRODUCT NUMBER

56600-YXXZLF

RoHS COMPATIBLE, SEE NOTE 5

PACKAGING OPTION, SEE NOTE 3

NUMBER OF POSITIONS, SEE SHEET 2

PLATING CODE

3= 0.76µm GOLD ON CONTACT AREA.

2µm MIN MATTE TIN ON TAIL.




4= 2µm MIN MATTE TIN FULL PLATED

1.27µm Ni MIN UNDERPLATING

NOTES:


- 1 - HOUSING: THERMOPLASTIC GLASS FILLED
FLAME RETARDANT PER UL 94 V-0 COLOR: GREY.
- 2 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 - STANDARD PACKAGING IN TUBE.
OPTIONNAL LETTER "A" FOR A TAPE & REEL
PACKAGING WITH PICK UP CAP
OPTIONNAL LETTER "K" FOR A TAPE & REEL
PACKAGING WITHOUT PICK UP CAP
- 4 - RECOMMENDED IR PROFILE PER TA842.
- 5 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR 30 SECONDS
MAX IN A CONVECTION, INFRA-RED OR VAPOR
PHASE OR REFLOW OVEN.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-47-0004
- 6 - END STAND-OFFS FOR 2x2 UP TO 2X5 POS
NO END STAND-OFFS FOR 2x6 UP TO 2x50 POS

VIEW A

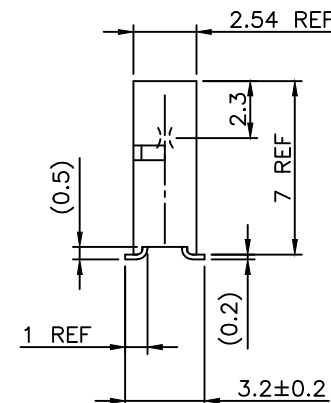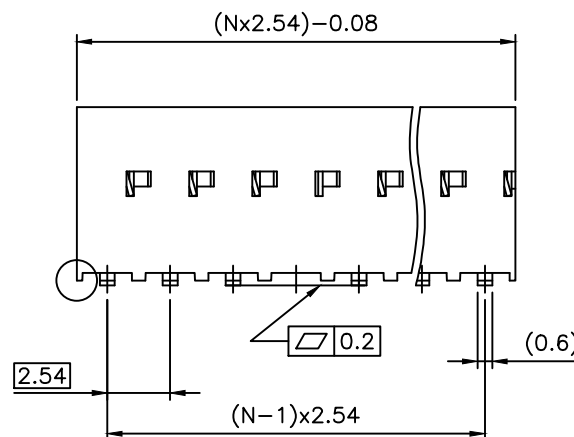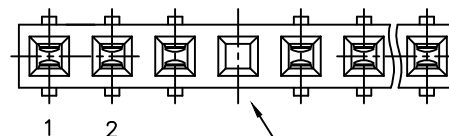

mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection mm		product family Dubox	
ltr	ecn no	dr	date	tolerances unless otherwise specified		±0.3		mm		title	
H	B-17256	LMU	14.03.20	angles		linear		scale 5:1		BtB recept.SMT	
J	B-19123	LMU	14.10.20	±2°						VCC SR SELECTIVE LOADED	
K	B-19931	LMU	15.01.08	dr		D.LEGRAND		01.12.14		dwg no	
L	F-24378	AMA	16.06.24	engr		P.NIZZI		01.12.14		sheet 1 of 2	
F	F11-0043	LMU	12.02.22	chr		D.LEGRAND		01.12.14		56600	
G	F12-0043	LMU	12.06.07	appd		PNZ		01.12.14		A3	
sheet	revision	L	C							type	
index	sheet	1	2							CUSTOMER Drawing	

PRODUCT NUMBER	NUMBER OF POS.	DIM”C”	DIM”D”	NB. OF TER.	CONTACT PLACED IN CAVITY																					
					1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
56600—Y01LF	1 x 13	30.48	32.94	7	x		x		x		x		x		x											
56600—Y02LF	1 x 05	10.16	12.62	3	x		x		x																	
56600—Y03LF	1 x 09	10.16	12.62	7	x	x	x		x	x	x		x													
56600—Y04LF	1 x 22	53.34	55.80	20		x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x		
56600—Y05LF	1 x 03	5.08	7.54	2	x		x																			
56600—Y06LF	1 x 17	40.64	43.10	9	x		x		x		x		x		x		x		x							

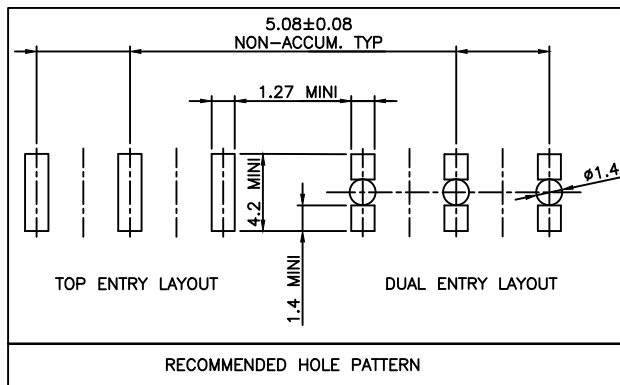

mat'l. code SEE NOTES				surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family Dubox
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
A	F04-0347	DLE	04.11.09	angles	linear	±0.3	BtB recept.SMT
B	F06-0204	DLE	06.06.19	±2°			Vert SR selct. load
C	F-24378	AMA	16.06.24	dr	D.LEGRAND	04.11.09	scale 5:1
				enr	P.NIZZI	04.11.09	FCJ
				chr	D.LEGRAND	04.11.09	dwg no
				appd	PNZ	04.11.09	sheet 2 of - size
sheet	revision						56600 A3
index	sheet						type CUSTOMER Drawing