


REV.	DATE	DESCRIPTION
A	11/25/03	UPDATE DRAWING FORMAT

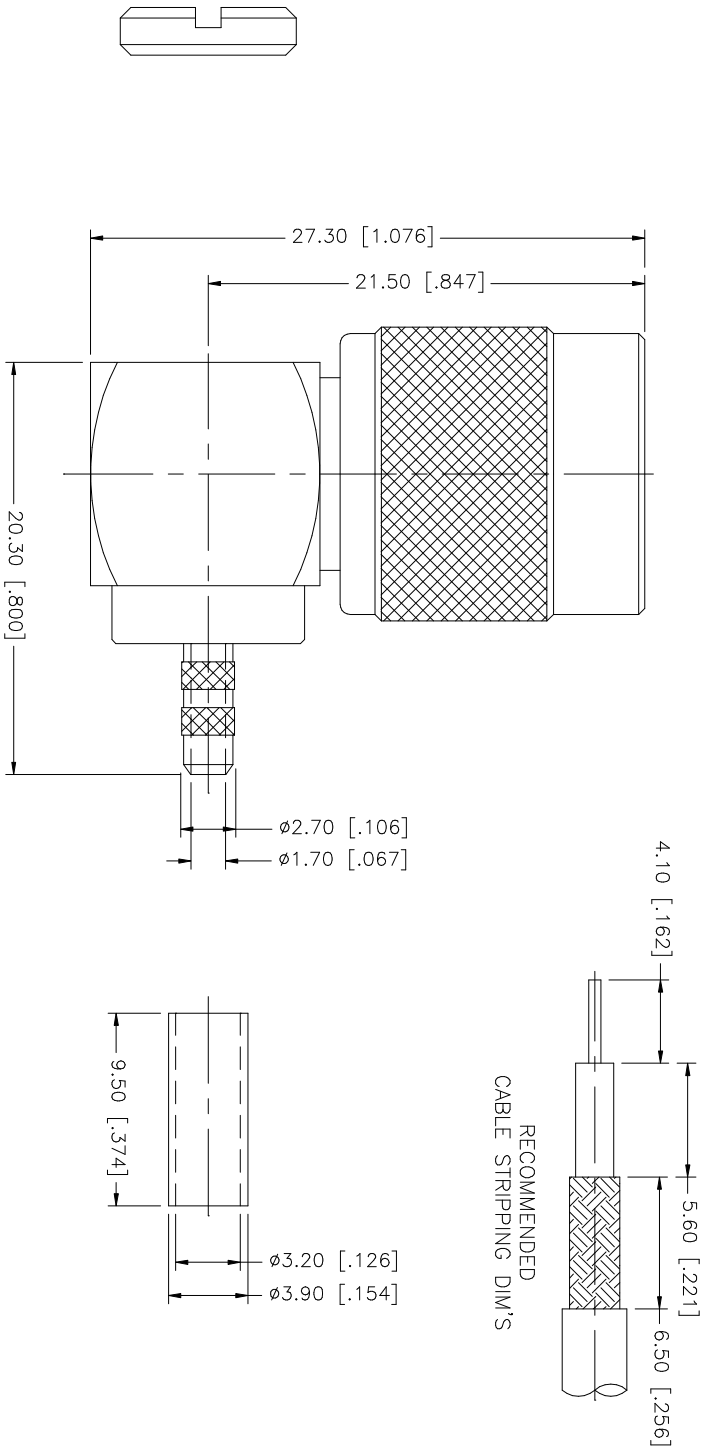

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS ARE FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex PART DESCRIPTION TNC R/A CRIMP PLUG (FOR RG174/U, 188A/U, 316/U CABLE) PART NO. 122148			
7				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN G.R.S.	11/25/03				
6				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED					
5	NUT	BRASS	NICKEL	1	ISSUED					
4	FERRULE	BRASS	NICKEL	1	SHEET 1 OF 1					
3	CONTACT PIN	BRASS	GOLD	1						
2	INSULATOR	DELIRIN	NATURAL	1						
1	BODY	BRASS	NICKEL	1						
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/122/122148.DWG	DWG. NO. 122148.DWG	REV. A	SIZE A	SCALE NA