

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850150141](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Header, 4-Row C-Pin, Press-Fit Style R Reverse, Vertical, Through Hole, 0.6µm (24µ") Gold (Au), 128 Circuits, Lead free

Documents:
[3D Model](#) [Product Specification PS-85013-0002 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [85015](#)
Application Backplane
Comments "R" at Style Represents Vertical Male DIN Connectors
Component Type PCB Header
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style R

Physical

Circuits (Loaded) 128
Circuits (maximum) 128
Circuits Detail Rows A, B, C & D
Color - Resin Gray
Durability (mating cycles max) 400
First Mate / Last Break Yes
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin Polyester
Number of Columns 32
Number of Pairs Open Pin Field
Number of Rows 4
Orientation Vertical
PC Tail Length (in) 0.228 In
PC Tail Length (mm) 5.80 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In, 0.157 In
PCB Thickness Recommended (mm) 1.60 mm, 4.00 mm
Packaging Type Carton
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Plating min: Mating (µin) 24
Plating min: Mating (µm) 0.6
Plating min: Termination (µin) 16

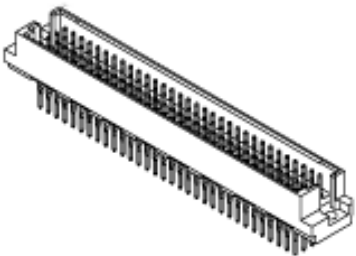

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[85015Series](#)

Mates With

[85042](#) DIN 41612 Receptacle . [85052](#) DIN
41612 Header

Use With

[85089-1081](#) Press-in Tool

Plating min: Termination (μm)	0.4
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +125°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	1A
Data Rate	622.0 Mbps
Voltage - Maximum	250V AC (RMS)

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-85015-001
Product Specification	PS-85013-0002
Sales Drawing	SDA-85015-0141

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

