






PIN RECEPTACLES
for .015" - .020" diameter pins (#11 contact)
and .015" - .022" diameter pins (#21 contact)
(see specific contact range on page 217)

**8467**

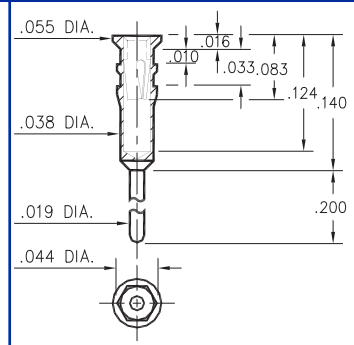
8467-0-15-XX-21-XX-04-0
Hex press-fit in .036 plated thru hole

6192


6192-0-15-XX-21-XX-04-0
Square press-fit in .032 plated thru hole

9553


9553-0-15-XX-X1-XX-04-0
Hex press-fit in .041 plated thru hole

5531


5531-0-15-XX-21-XX-10-0
Hex press-fit in .041 plated thru hole

7553

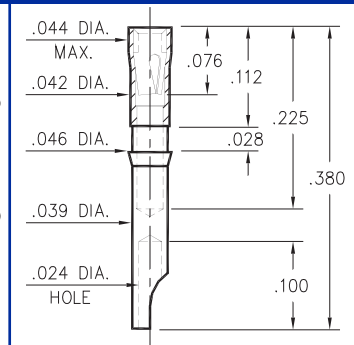
7553-0-15-XX-11-XX-10-0
Hex press-fit in .041 plated thru hole

9407


9407-0-15-XX-11-XX-10-0
Solder mount in .040 min. mounting hole

9462


9462-0-15-XX-21-XX-04-0
Hex press-fit in .043 plated thru hole

1147


1147-0-18-XX-21-XX-10-0
Press-fit in .043 min. mounting hole
Accepts wire sizes up to .014" Dia.

3061

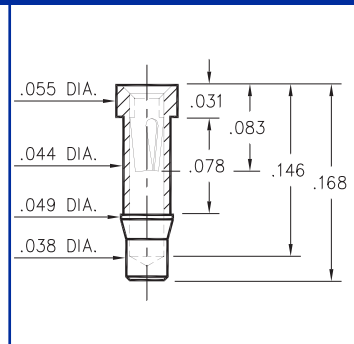
3061-0-19-XX-21-XX-10-0
Wire Crimp Termination. Accepts wire sizes 28 AWG Max. / 32 AWG Min.

0579

0579-0-15-XX-X1-XX-10-0
Press-fit in .040 mounting hole

8874

8874-0-15-XX-11-XX-10-0
Bottom entry
Surface mount

0613

0613-0-15-XX-21-XX-10-0
Press-fit in .047 mounting hole

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

DIMENSION IN INCHES
TOLERANCES ON:
LENGTHS: ±.005
DIAMETERS: ±.002
ANGLES: ± 2°

ORDER CODE: XXXX - X - 1X - XX - XX - XX - XX - 0**BASIC PART #****SPECIFY SHELL FINISH:**

- 01 200μ" TIN/LEAD OVER NICKEL
- 80 200μ" TIN OVER NICKEL (RoHS)
- 15 10μ" GOLD OVER NICKEL (RoHS)

**SPECIFY CONTACT FINISH:**

- 02 100μ" TIN/LEAD OVER NICKEL
- 84 100μ" TIN OVER NICKEL (RoHS)
- 27 30μ" GOLD OVER NICKEL (RoHS)

SELECT CONTACT**#11 or #21 CONTACT (DATA ON PAGE 217)**