

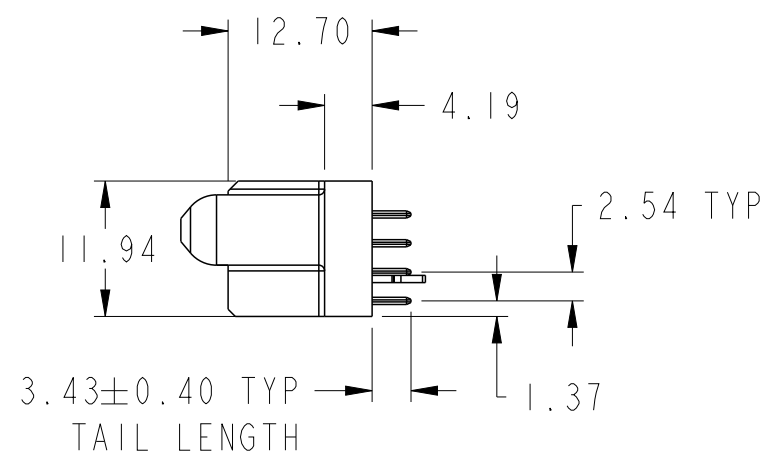
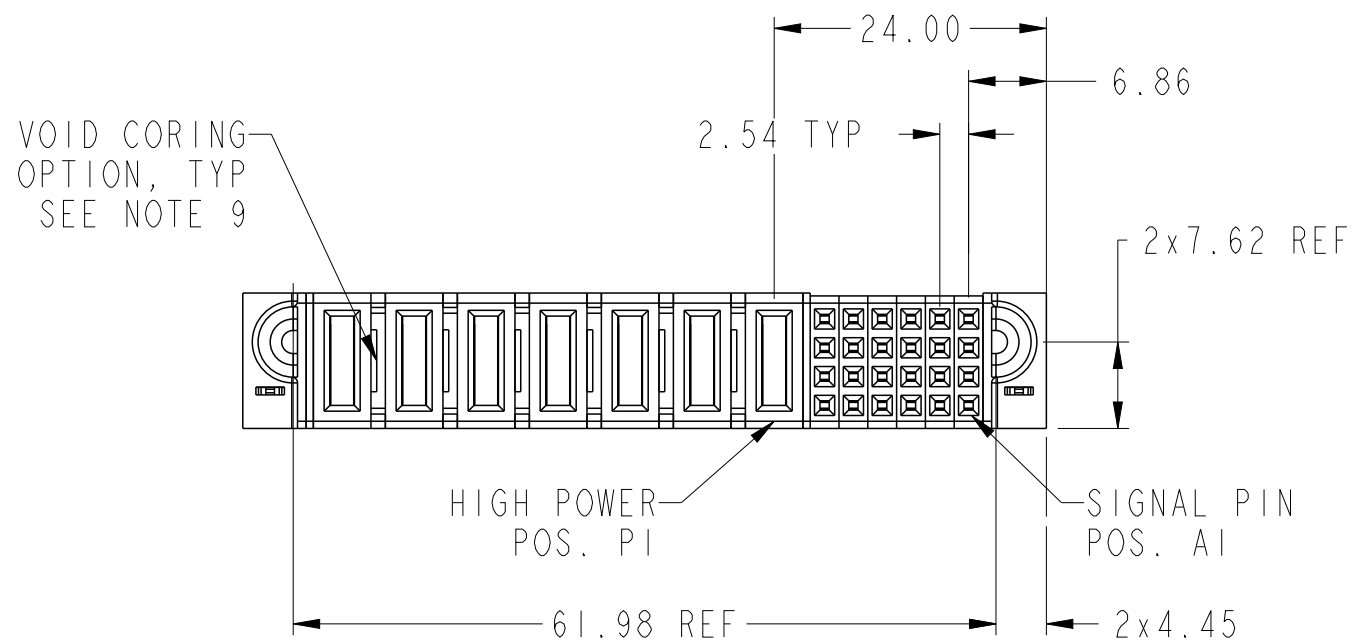
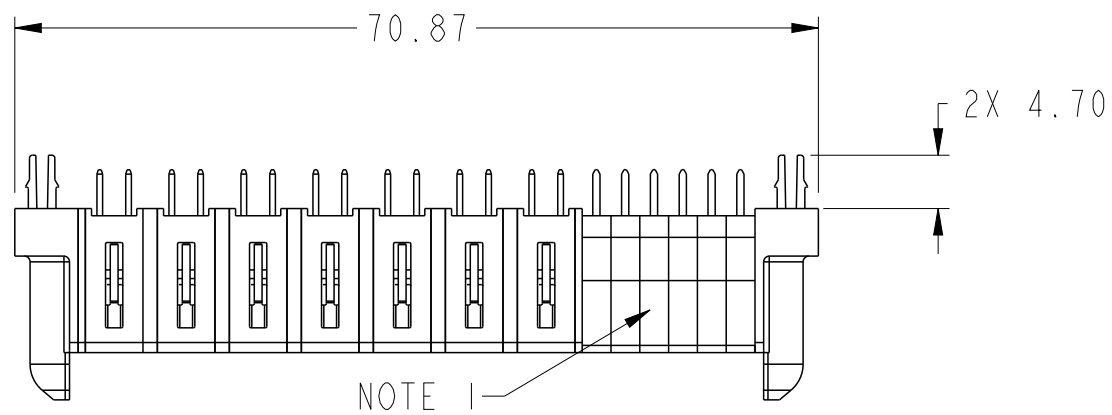


PRODUCT NUMBER SEE SHEET 2

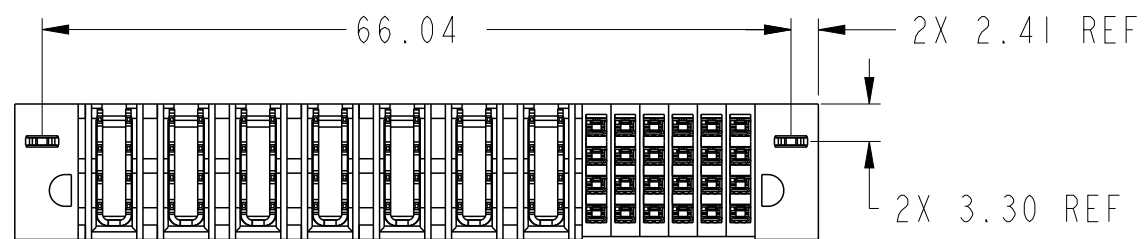

spec ref				dr		Zhen-Hua Liu	2015/10/13		projection				size		A3	scale		3:2						
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu	2015/12/03						ecn no				-					
ASME Y14.5						chr		Fancy Zhang	2015/12/03						rel level		Released							
						appr		Pei-Ming Zheng	2015/12/03						product family		PowerBlade+							
surface 		linear				title		24S + 7HP VT STB RECEPTACLE				dwg no		10106130-7006001				rev		A				
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw				sheet 1 of 3								

- NOTES:
- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
 - 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
 - 3) PLATING SPECIFICATION: 10116351
 - 4) DENOTES CONNECTOR KEEP OUT ZONE.
 - 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
 - 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
 - 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
 - 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.
 - 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZING THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.



Copyright FCI.

dr	Zhen-Hua Liu	2015/10/13	projection	MM	size	A3	scale	1:1	
eng	Vicking Liu	2015/12/03			ecn no	-			
chr	Fancy Zhang	2015/12/03							
appr	Pei-Ming Zheng	2015/12/03	product family		PowerBlade+	rel level	Released		
	title	24S + 7HP VT STB RECEPTACLE			dwg no	10106130-7006001		rev	
									A
www.fci.com	cat. no.	Product - Customer Drw				sheet 3 of 3			