

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT 2003 By —

LOC

J

	DIST
--	------

REVISIONS

变更

	F
--	---

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

	APVD
--	------


H2

REVISÉ PER ECO-11-005140

28MAR11

RK

HMR

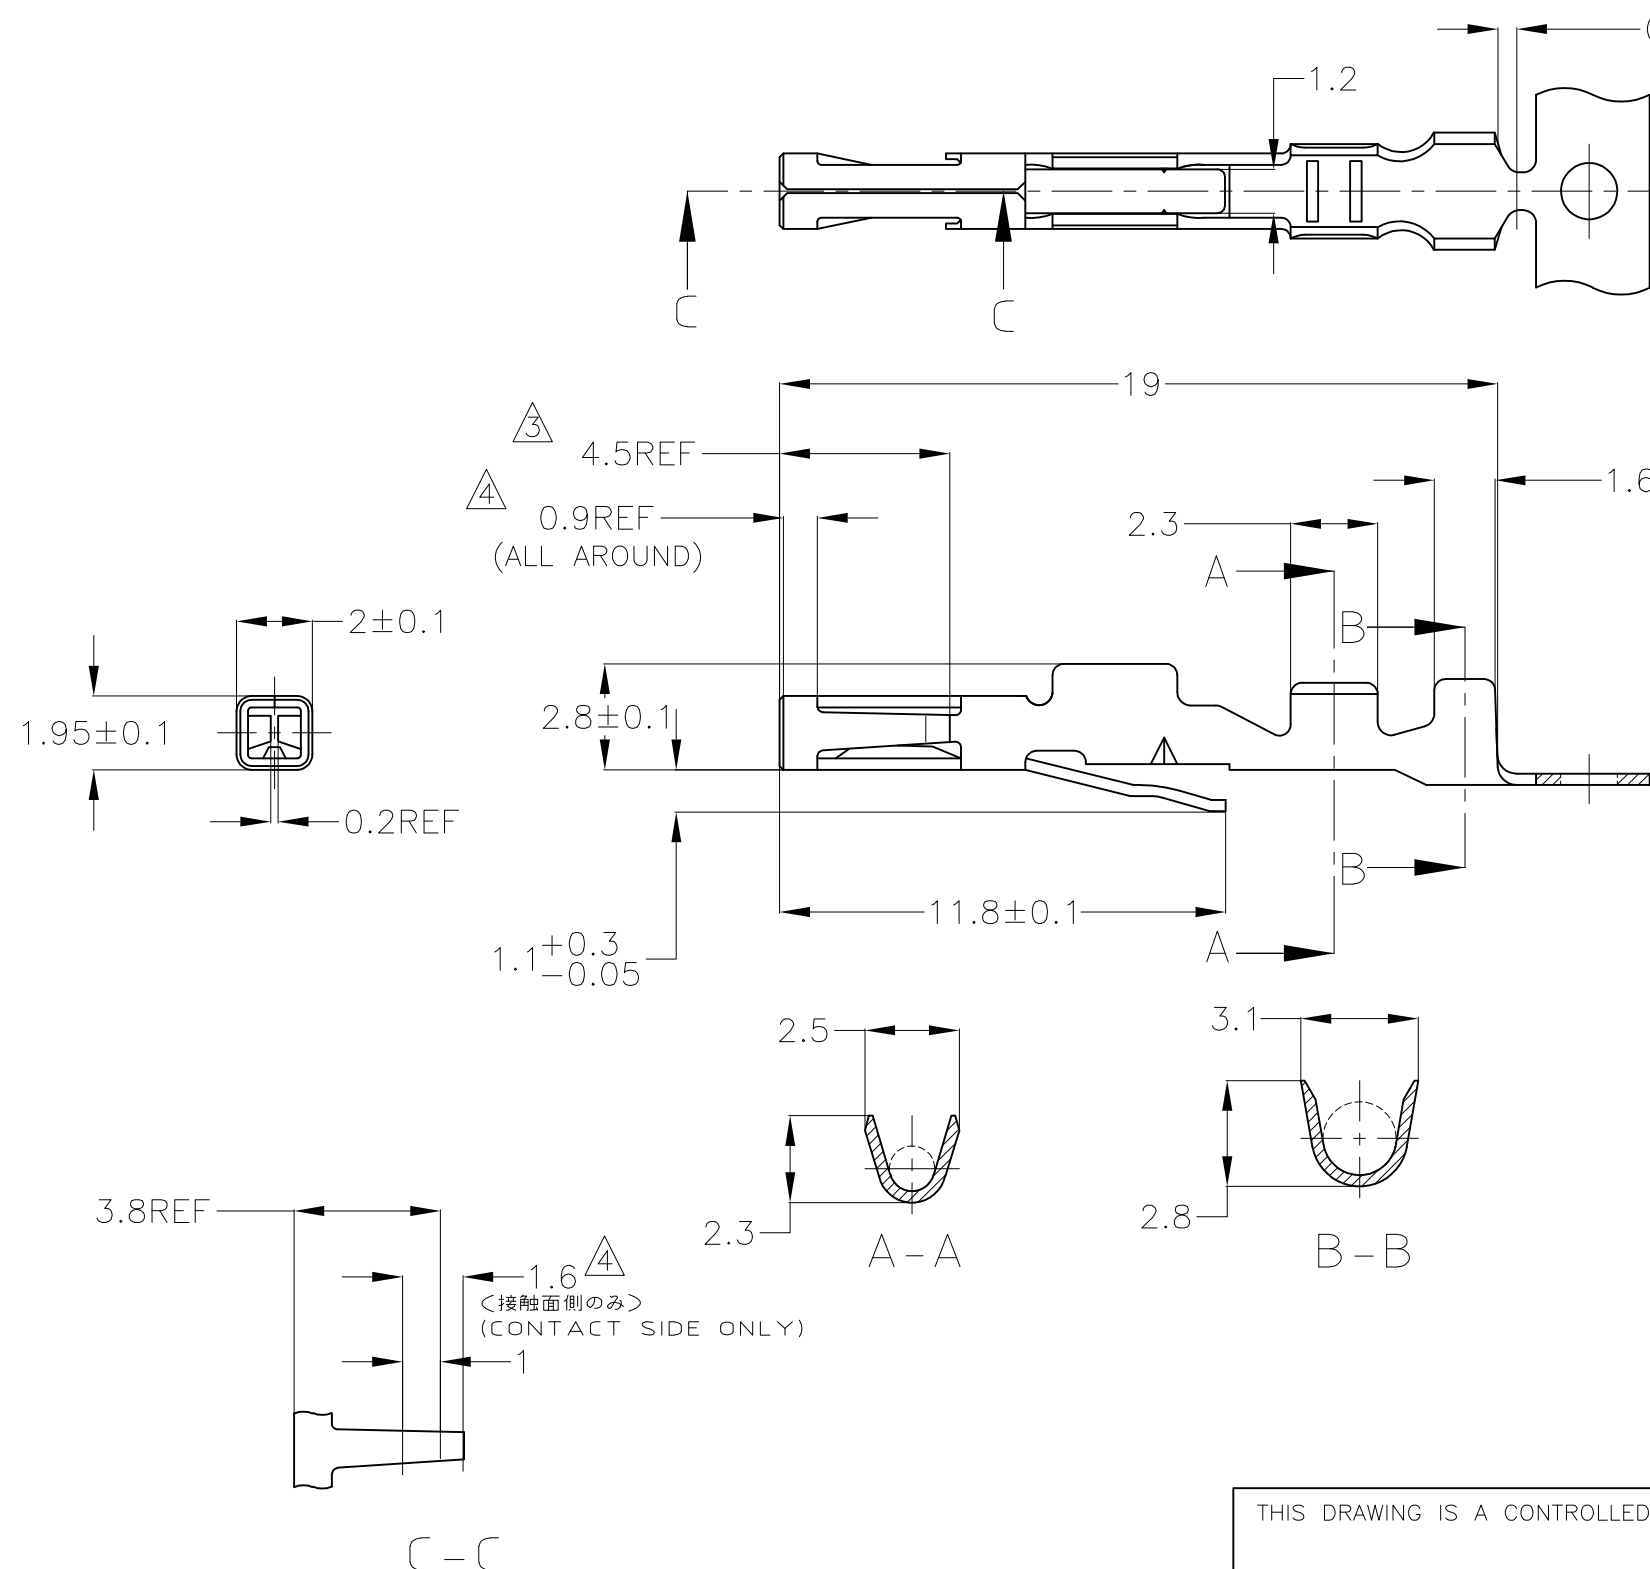


注；

- 1 使用ハウジング型番 172021,172047 他
- 2 製品規格: 108-5124
- ③ 全面ニッケルめっきの上に4.5mmの部分に0.38 μ m以上の金めっき
- ④ 全面ニッケルめっきの上に接触バネ内側 1.6mmの部分に0.38 μ m以上の金めっき
コンタクト先端 0.9mm のところに金フラッシュめっき
- ⑤ 1-170291-1の逆巻きリール

NOTES;

- 1 MATABLE HOUSING: 172021, 172047 AND OTHERS
2 PRODUCT SPECIFICATION: 108-5124
3 0.38 μ m MIN. SELECTIVE GOLD PLATING IN 4.5mm LENGTH OVER
4 NICKEL PLATING
5 0.38 μ m MIN. SELECTIVE GOLD IN 1.6mm LENGTH (INSIDE OF LEAF) OVER
6 NICKEL PLATING, GOLD FLASH PLATING IN TIP OF CONTACT 0.9mm LENGTH
7 REVERSE REEL OF 1-170291-1

	型番 (NUMBER)	材料 (MATERIAL)	仕上 (FINISH)	バラ端子型番 (L/P PART NUMBER)
OBSOLETE	1-170291-1	黄銅, BRASS, 0.3t	錫めっき済 PRE-TINND MAT'L	1-170321-1
	1-170291-3	黄銅, BRASS, 0.3t		—/—
	1-170291-4	リン青銅, 0.3t PH0S-BZ	錫めっき済 PRE-TINND MAT'L	1-170321-4
	1-170291-7	リン青銅, 0.3t PH0S-BZ		—/—
	 3-170291-1	黄銅, BRASS, 0.3t	錫めっき済 PRE-TINND MAT'L	—/—

		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.YAMAGUCHI 09JUL03		 TE Connectivity								
				CHK K.BETSUI 09JUL03										
		DIMENSIONS: 単位： 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3		APVD K.BETSUI 09JUL03		NAME 名称						
				0-PLC ± 1-PLC ±1° 2-PLC ± 3-PLC ± 4-PLC ± ANGLES ±		PRODUCT SPEC 製品規格 108-5124		DUAL LINE INTERLOCK CONNECTOR						
WIRE RANGE 0.3~0.56mm ² (AWG#22-#20)						APPLICATION SPEC 取付適用規格 114-5045								
INSULATION DIA. 2.4mm MAX.		MATERIAL 材料 SEE TABLE		FINISH 仕上 SEE TABLE		WEIGHT —		SIZE A3		CAGE CODE 00779	DRAWING NO 番号 G-170291		RESTRICTED TO —	
CUSTOMER DRAWING								SCALE 尺度 5:1		SHEET 1 OF 1		REV H2		