
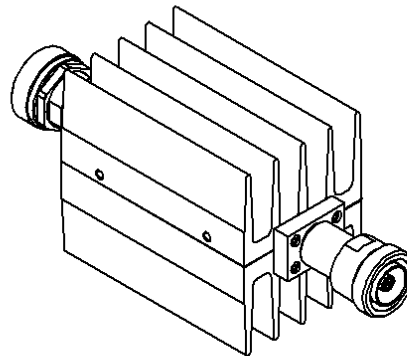


7-16 ATTENUATOR

3 DB 3 GHZ 100W

R420.703.110

Series : ATTENUATOR

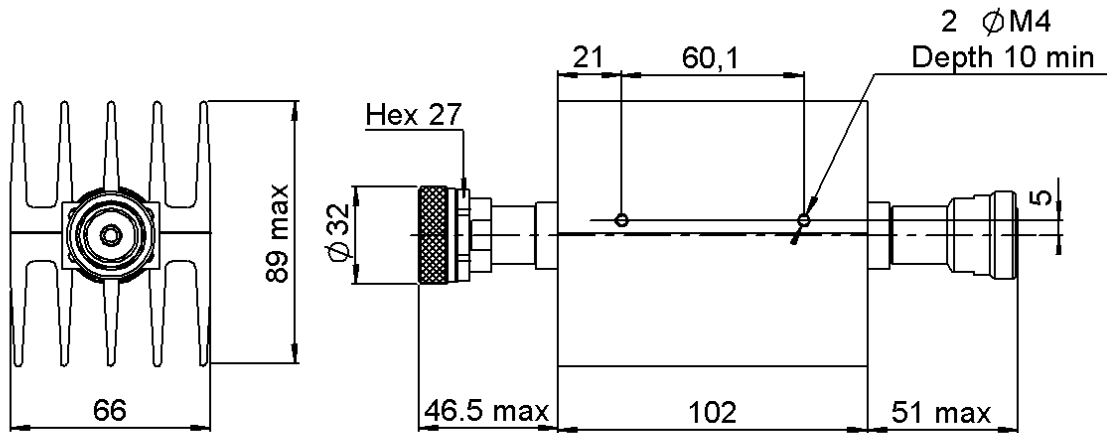

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING(μm)
BODY	BRASS	BBR 0.5 OVER SILVER 3
MALE CENTER CONTACT	BRASS	BBR 0.5 OVER SILVER 3
FEMALE CENTER CONTACT	BERYLLIUM COPPER	BBR 0.5 OVER SILVER 3
OUTER CONTACT	BRASS	BBR 0.5 OVER SILVER 5
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
SUBSTRATE	ALUMINA	
RESISTOR	THICK FILM	
OTHERS PARTS	ALUMINIUM	BLACK PAINTING

Issue : 0547 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

7-16 ATTENUATOR

R420.703.110

3 DB 3 GHZ 100W

Series : ATTENUATOR

ELECTRICAL CHARACTERISTICS


Frequency (GHz)	DC - 1	1 - 2	2 - 3	
V.S.W.R (≤)	1.10	1.25	1.30	
Deviation(±dB)	1	1	1	
Operating Frequency Range	DC - 3		GHz	
Impedance	50		Ω	
Nominal Attenuation	3		dB	
Peak power at 25°C (1μs, 1%)	5000		W	
Average power at 25°C	100		W (Free Air Cooled)	
			W (Conduction Cooled)	

MECHANICAL CHARACTERISTICS

Connectors	7-16	Male Female	IEC 169-4
Weight	926,1900	g	

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-40 / +85 °C
Storage temperature range	-40 / +85 °C

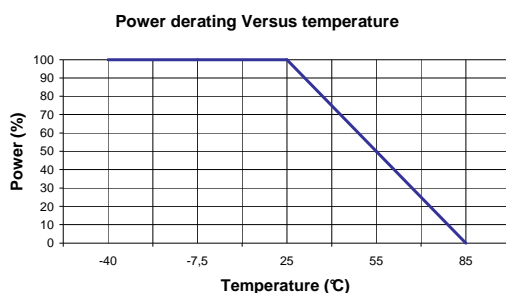

SPECIFICATION

OTHER CHARACTERISTICS

Issue : 0547 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.