

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20





COPYRIGHT 20

BY -



ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	07SEP2017	YC	CW

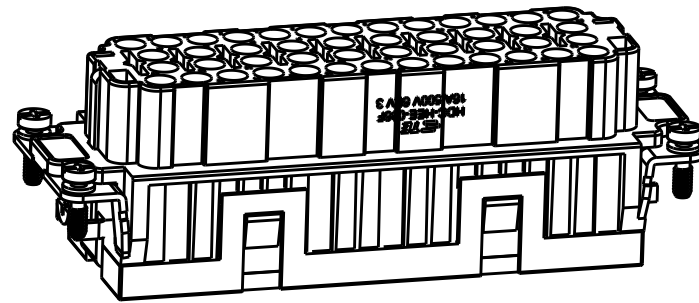
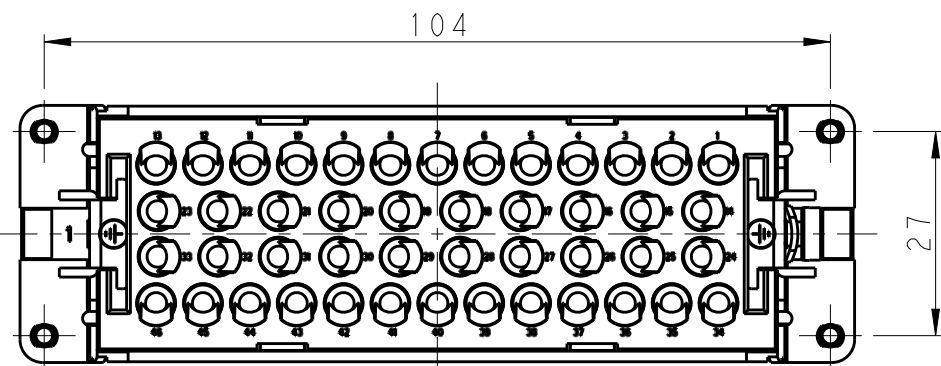


SCALE 4:5

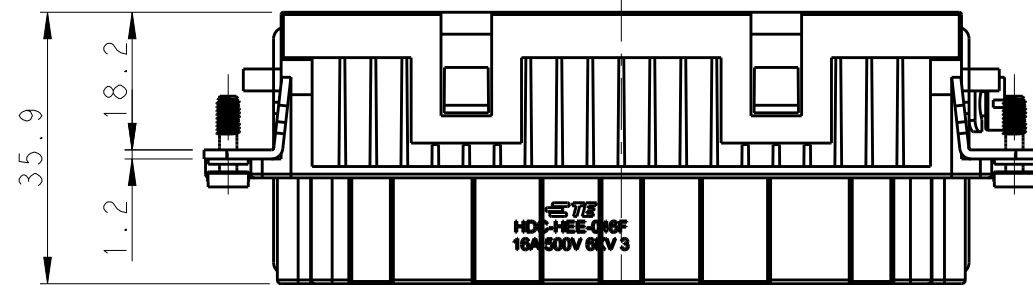

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5N.m
4X M3螺丝, 推荐锁紧力矩0.5N.m

M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2N.m
M4螺丝, 推荐锁紧力矩1.2N.m

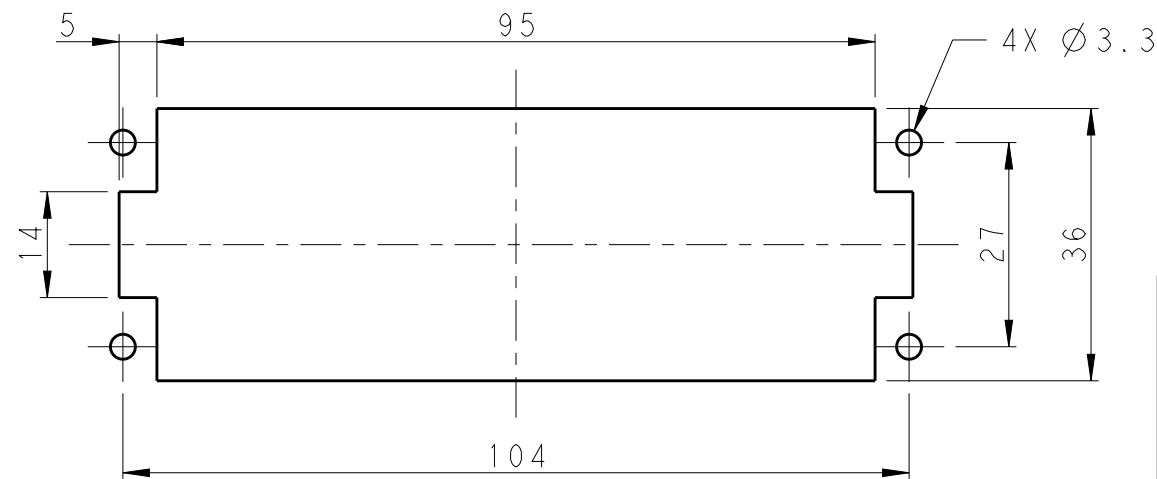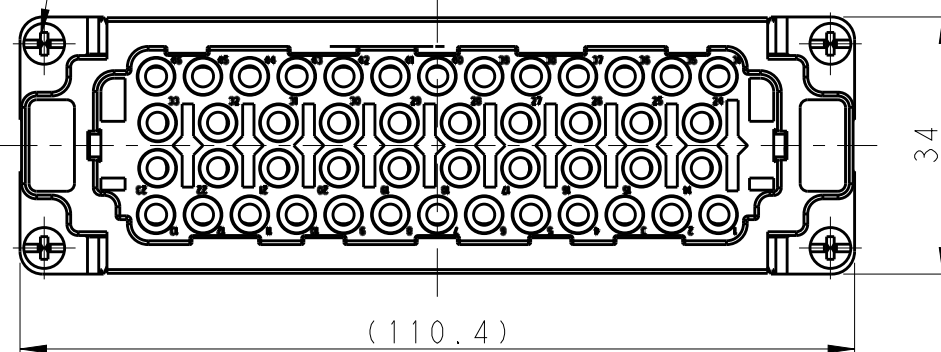

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X20XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

T2050462201-007

HEE-046-F

HEE-046 FEMALE INSERT
HEE-046 母插

PART NUMBER
料号

PART DESCRIPTION
描述

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 07SEP2017

YORK CHEN

CHK 07SEP2017

GINO YAO

APVD 07SEP2017

CHRIS WANG

PRODUCT SPEC

108-106137

APPLICATION SPEC

114-106137

WEIGHT

-

CUSTOMER DRAWING

NAME

HEE-046-F

SIZE

A300779

CAGE CODE

-

DRAWING NO

-

RESTRICTED TO

-

SCALE

1:1

SHEET


1 OF 1

REV

A

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC

±0.1

1 PLC

±0.1

2 PLC

±0.1

3 PLC

±0.1

4 PLC

±0.1

ANGLES

±0.1

FINISH

-

MATERIAL

-

-

-