


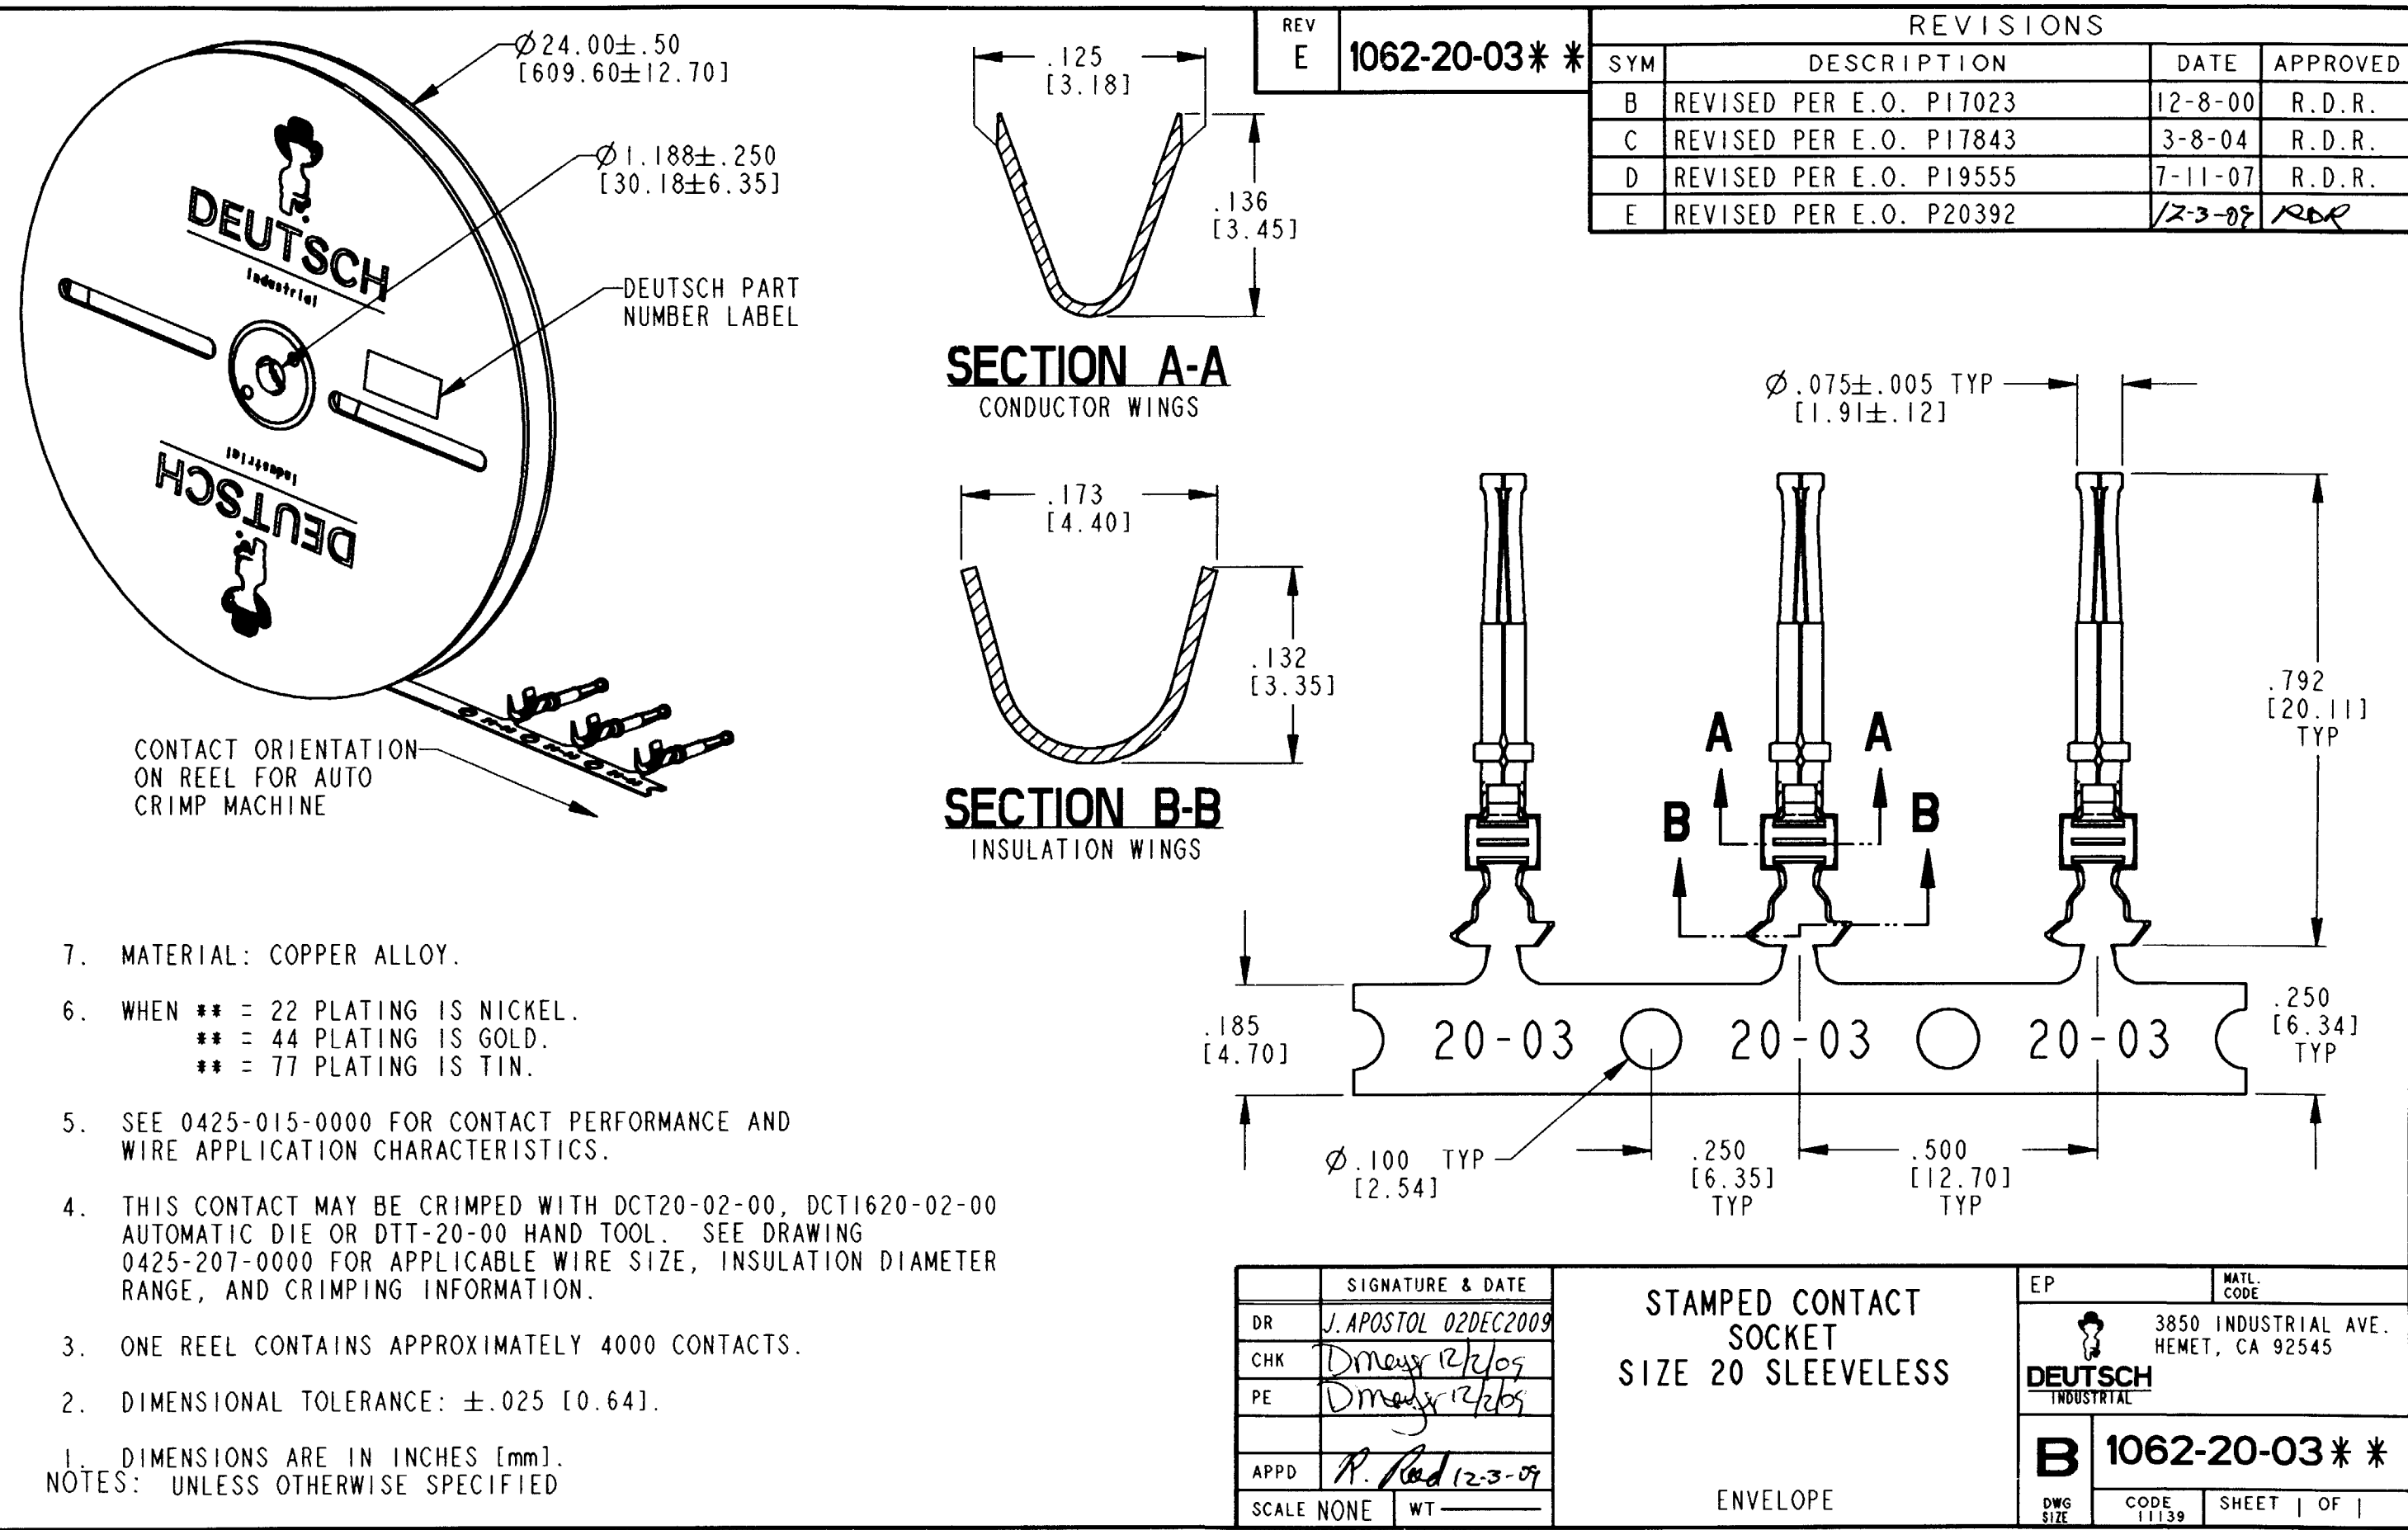

7. MATERIAL: COPPER ALLOY.
6. WHEN ** = 22 PLATING IS NICKEL.
** = 44 PLATING IS GOLD.
** = 77 PLATING IS TIN.
5. SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND WIRE APPLICATION CHARACTERISTICS.
4. THIS CONTACT MAY BE CRIMPED WITH DCT20-02-00, DCT1620-02-00 AUTOMATIC DIE OR DTT-20-00 HAND TOOL. SEE DRAWING 0425-207-0000 FOR APPLICABLE WIRE SIZE, INSULATION DIAMETER RANGE, AND CRIMPING INFORMATION.
3. ONE REEL CONTAINS APPROXIMATELY 4000 CONTACTS.
2. DIMENSIONAL TOLERANCE: $\pm .025$ [0.64].
1. DIMENSIONS ARE IN INCHES [mm].
NOTES: UNLESS OTHERWISE SPECIFIED

REV		REVISIONS			
E		SYM	DESCRIPTION	DATE	APPROVED
		B	REVISED PER E.O. P17023	12-8-00	R.D.R.
		C	REVISED PER E.O. P17843	3-8-04	R.D.R.
		D	REVISED PER E.O. P19555	7-11-07	R.D.R.
		E	REVISED PER E.O. P20392	12-3-09	RDR

SIGNATURE & DATE		STAMPED CONTACT SOCKET SIZE 20 SLEEVELESS		EP		MATL. CODE	
DR	J. APOSTOL 02DEC2009			DEUTSCH INDUSTRIAL		3850 INDUSTRIAL AVE. HEMET, CA 92545	
CHK	D. May 12/05						
PE	D. May 12/05						
APPD		R. Red 12-3-09		B		1062-20-03**	
SCALE		NONE		DWG SIZE		CODE 11139	
		WT				SHEET 1 OF 1	