

Surge protection base element - PT 4-BE - 2839402

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)




Base element for protective plug PT with protective circuit for a 4-wire floating signal circuit, bridge between the connections 3-4 (GND) and 9-10, for mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

Why buy this product

- Plugs can be checked with CHECKMASTER
- Maximum ease of maintenance thanks to the two-piece design
- Base element remains an integral part of the installation
- Consistent plug-in signal circuit protection
- Impedance-neutral disconnection of plug for test and maintenance purposes



Key commercial data

| | |
|------------------------|---|
| Packing unit | 1 |
| Minimum order quantity | 10 |
| Catalog page | Page 96 (TT-2011) |
| GTIN |  4 017918 182816 |
| Custom tariff number | 85363010 |
| Country of origin | GERMANY |

Technical data

General

| | |
|---|---|
| Housing material | PA 6.6 |
| Inflammability class according to UL 94 | V0 |
| Color | black |
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Mounting type | DIN rail: 35 mm |
| Design | DIN rail module, two-section, divisible |
| Degree of protection | IP20 |
| Width | 17.7 mm |
| Height | 89.8 mm |
| Depth | 52 mm |
| Pitch unit | 1 Div. |

Surge protection base element - PT 4-BE - 2839402

Technical data

Protective circuit

| | |
|---------------------------------|------|
| Message: Surge protection fault | None |
|---------------------------------|------|

Connection data

| | |
|--|-----------------------|
| Connection method | Screw connection |
| Connection type IN | Screw terminal blocks |
| Connection type OUT | Screw terminal blocks |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm |
| Stripping length | 8 mm |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |

Connection, protective circuit

| | |
|-----------------------|-----------------|
| Standards/regulations | IEC 61643-21 |
| Standards/regulations | DIN EN 61643-21 |

Classifications

eclass

| | |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130803 |
| eCl@ss 7.0 | 27130803 |

etim

| | |
|----------|----------|
| ETIM 2.0 | EC000472 |
| ETIM 3.0 | EC000472 |
| ETIM 4.0 | EC000472 |
| ETIM 5.0 | EC000472 |

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11 | 39121610 |
| UNSPSC 12.01 | 39121610 |
| UNSPSC 13.2 | 39121620 |

Surge protection base element - PT 4-BE - 2839402

Approvals

Approvals

Approvals

UL Listed / GOST / GL

Ex Approvals

UL Listed / cUL Listed / ATEX / cULus Recognized

Approvals submitted

Approval details

UL Listed 

GOST 

GL

Accessories

Accessories

Assembly

Shield connection - SSA 5-10 - 2839512



Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black

Shield connection - SSA 3-6 - 2839295



shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black

Surge protection base element - PT 4-BE - 2839402

Accessories

Marking

Zack marker strip - ZB 5 :UNBEDRUCKT - 1050004



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 5.2 mm, Lettering field: 5.1 x 10.5 mm

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 5 mm, Lettering field: 5.1 x 5.2 mm

Zack marker strip - ZB 5,8:UNBEDRUCKT - 2715209



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 5.8 mm, Lettering field: 5.75 x 10.5 mm

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Necessary add-on products

Surge protection base element - PT 4-BE - 2839402

Accessories


Surge protection connector - PT 2-ISDN-NT-ST - 2858098



Surge protection plug for base element, for the protection of a double wire of the Uko interface (ISDN).

Drawings

Dimensioned drawing

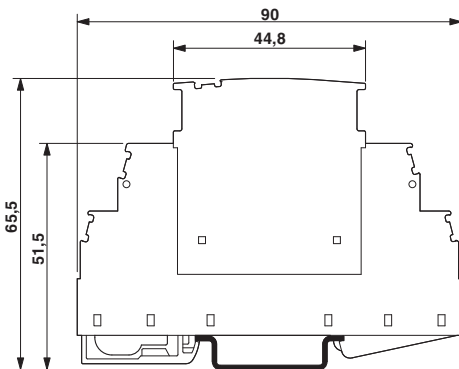

The figure shows the complete module consisting of a base element and connector