


| SIGN                                           | DATE     | DESCRIPTION         | APPROVER |
|------------------------------------------------|----------|---------------------|----------|
| △                                              | 04/25`11 | Material is changed | Chen Bo  |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |          |                     |          |

Material:

- Item ① Terminal housing: PA66 (UL94V-0)
- Item ② Male contact long pin: Brass, Tin plated
- Item ③ Male contact short pin: Brass, Tin plated
- Item ④ With flange nut: Brass, Nickel plated, M2.0

Electrical: cULus

- Voltage rating: 150V
- Current rating: 7 A
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

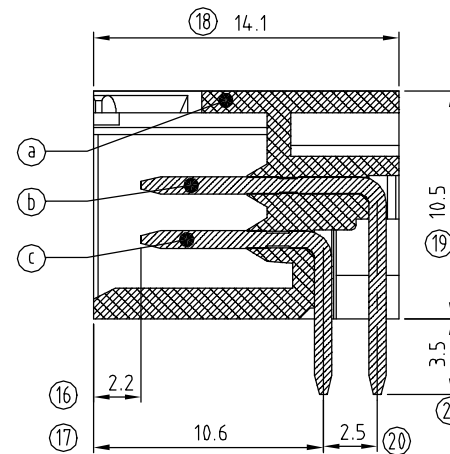

SECTION A-A

V X xx 1 2 x 1 xxxx G

|                  |   |                                                                        |
|------------------|---|------------------------------------------------------------------------|
| NO of pole       | 0 | RoHS                                                                   |
| 04 2x2 CONTACTS  | 3 | Pb<40,000ppm                                                           |
| 06 3x2 CONTACTS  | 5 | 0000 Standard @ Logo                                                   |
| ... ..           | 6 | 000A Standard ANY Logo                                                 |
| 48 24x2 CONTACTS | 8 | Any special item by customer request, please contact sales department. |
|                  |   |                                                                        |

|                        |
|------------------------|
| Dim.L=(N/2-1)×3.5+10.3 |
| Dim.P=(N/2-1)×3.5      |
| Dim.K=(N/2-1)×3.5      |

N=Number of poles

| POLES       | Dim. Tol | Dim.L | Dim.P |
|-------------|----------|-------|-------|
| 2x2p-2x6p   |          | ±0.15 | ±0.10 |
| 2x7p-2x12p  |          | ±0.25 | ±0.20 |
| 2x13p-2x18p |          | ±0.35 | ±0.30 |
| 2x19p-2x24p |          | ±0.40 | ±0.35 |

**ANYTEK**

**INSPECTION COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                         |                      |                       |                                                                                       |             |      |           |
|----------|-----------------------------------------|----------------------|-----------------------|---------------------------------------------------------------------------------------|-------------|------|-----------|
| TITLE    | VX 3.5mm Series With flange Right-angle |                      |                       |                                                                                       |             |      |           |
| PART NO. | VXxx12x1xxxxG                           |                      |                       | DWG NO.                                                                               | 8VX0001     |      |           |
| APPROVED | CHECKED                                 | DESIGNED             | DRAWN                 | CUST NO.                                                                              |             |      | Tolerance |
|          |                                         | Runner<br>2011.04.25 | Chen Bo<br>2011.04.25 |  | UNIT: mm    | X.   | ±0.50     |
|          |                                         |                      |                       |                                                                                       | SCALE: NONE | X.X  | ±0.30     |
|          |                                         |                      |                       | SHEET: 01/01                                                                          | REV: C      | X.XX | ±0.10     |
|          |                                         |                      |                       |                                                                                       |             | X°   | ±1°       |

