








REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0103	2008/09/16	Shin	Add Note
C	LEN1640071	2016/03/30	Vicky	Update Logo
D	CI90268	2019/02/18	Ruru	Modify Note

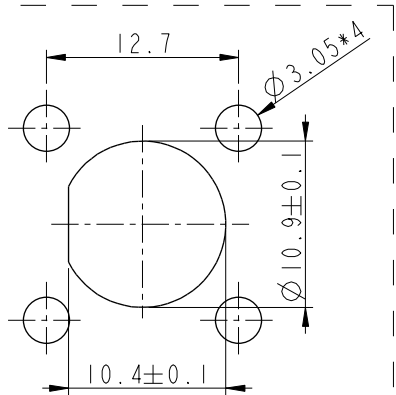

Recommended Panel Cut-Out



Pin Assignments
Front View

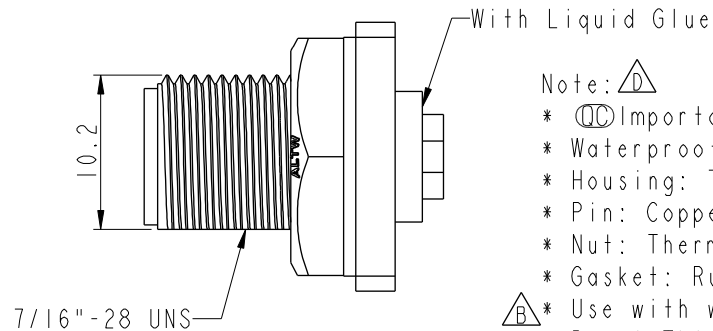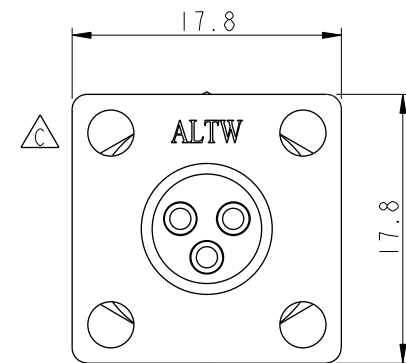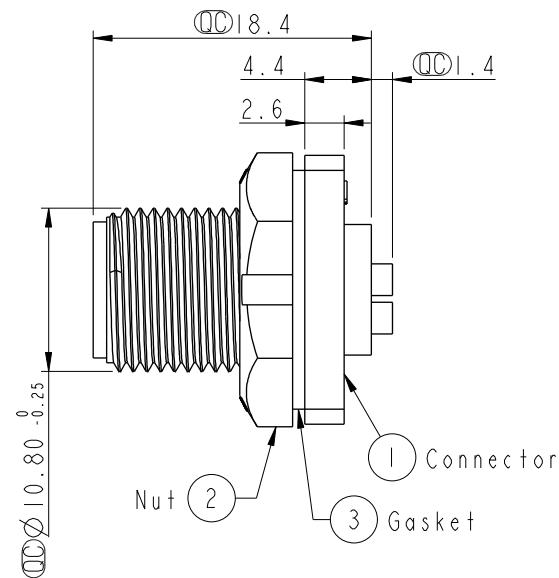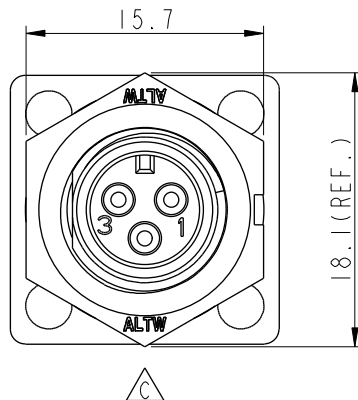

Note:

- * Important Dimension To Check
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- * Use with waterproof cap or dust cap
Panel Thickness Max: 4.0mm
- * Use without waterproof cap or dust cap
Panel Thickness Max: 5.0mm
- * Gasket and Nut are packed separately in PE bags.

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE			
Mini Panel Screw 3Pin M Conn. M Pin			
SCALE	SIZE	SHEET OF	
2:1	A4	1 1	
REV.	WC-REV.	Inspection item	
D	A.2		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	AD-03PMMS-SS7001	DRAWN BY	Ruru	DATE	2019-02-18
DWG NO.	AD-03PMMS-SS7001	CHECKED BY	Rita	DATE	2019-02-18
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-02-18

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.