
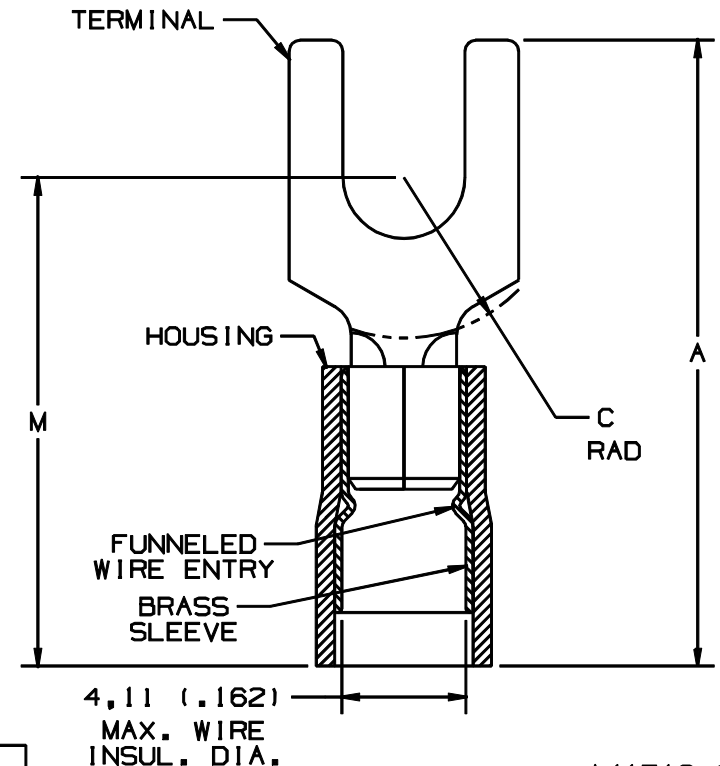


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PART NUMBER |          | STUD SIZE | WIRE RANGE mm <sup>2</sup> | DIMENSIONS mm     |                   |                   |                   |                   |
|-------------|----------|-----------|----------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| PREFIX      | PK       |           |                            | A <sup>±.25</sup> | W <sup>±.25</sup> | C <sup>±.38</sup> | B <sup>±.25</sup> | M <sup>±.50</sup> |
| PMNF2-3F    | -C<br>-M | M3        | 1.5-2.5<br>(.16-.14)       | 19.81<br>(.78)    | 5.89<br>(.23)     | 5.05<br>(.20)     | .81<br>(.03)      | 16.26<br>(.64)    |
| PMNF2-4F    | -C<br>-M | M4        | 1.5-2.5<br>(.16-.14)       | 21.34<br>(.84)    | 7.87<br>(.31)     | 5.89<br>(.23)     | .81<br>(.03)      | 17.27<br>(.68)    |
| PMNF2-5F    | -C<br>-M | M5        | 1.5-2.5<br>(.16-.14)       | 21.85<br>(.86)    | 8.58<br>(.34)     | 6.35<br>(.25)     | .81<br>(.03)      | 17.78<br>(.70)    |
| PMNF2-6F    | -C<br>-M | M6        | 1.5-2.5<br>(.16-.14)       | 26.16<br>(1.02)   | 11.18<br>(.44)    | 8.45<br>(.33)     | .81<br>(.03)      | 18.81<br>(.74)    |

# NOTES:

- USED FOR:
  - 600V MAX. VOLTAGE RATING
  - 105°C (221°F) MAX. TEMP. RATING
  - SOLID & STRANDED COPPER WIRE
- PACKAGE QTY:
  - STD: C=100
  - BULK: M=1000
- MATERIAL:
  - STAMPING: ETP 110 COPPER, TIN PLATED
  - HOUSING: TYPE 6/6 NYLON, BLUE
- WIRE STRIP LENGTH: 5.6<sup>+8</sup><sub>-0</sub> (7/32<sup>+1/32</sup><sub>-0</sub>)
- INSTALLATION TOOLS: REF DWGS.  
A41522, A41523, A41524, A41525
- DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG

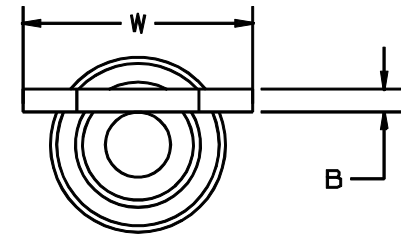

A41518\_04

|     |       |     |     |                                                              |       |     |      |
|-----|-------|-----|-----|--------------------------------------------------------------|-------|-----|------|
| 04  | 10/97 | JMB |     | CHANGED PERIODS TO COMMAS ON ALL METRIC DIMENSIONS.          |       |     |      |
| 03  | 1/97  | TM  | RLS | UPDATE DIMENSIONS<br>FILESPEC WAS NPC_A41518_02              | 05478 | DBH | LA   |
| 02  | 1/92  | BK  | RLS | CHANGED COMMAS TO PERIODS<br>#5 WAS A41511, #1C ADDED COPPER | 00765 | KS  | LA   |
| 01  | 8/91  | SJ  | SJ  | LM WIRE STRIP LENGTH WAS 7.1 mm                              | 00563 | KS  | LA   |
| 00  | 6/91  | BK  | SJ  | RELEASED                                                     | 00538 | KS  | LA   |
| REV | DATE  | BY  | CHK | DESCRIPTION                                                  | ECN # | PM  | CUST |

**PANDUIT**

CORP.

TINLEY PARK, ILLINOIS

1.5-2.5 mm<sup>2</sup> METRIC NYLON INSULATED,  
FUNNELED ENTRY FORK TERMINAL

DRAWN BY BDK CHK'D LM SCALE NONE DRAWING NO. A41518