
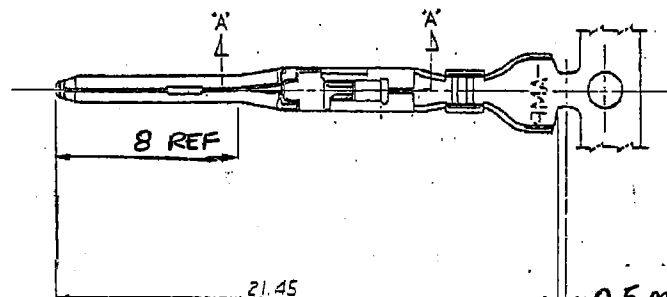



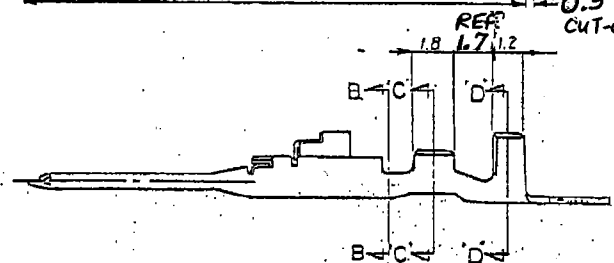


4

3

2

第三角法 (THIRD ANGLE PROJECTION)

断面 C-C
(SECT.)断面 D-D
(SECT.)断面 B-B
(SECT.)断面 A-A
(SECT.)0.5 MAX
CUT-OFF TAB

注: 1. 通用規格

製品規格 108-5302

取付通用規格 114-5142

2. 取扱説明書 IS-503T

NOTES: 1. APPLICABLE SPEC.

PRODUCT SPEC. 108-5302

APPLICATION SPEC. 114-5142

2. INSTRUCTION SHEET IS-503T

	NYE製: 502H-20-UV (NYE: 502H-20-UV ル)カチ才化処理 (APPLIED LUBRICANT OIL)	錫めき溶黄銅 (PRE TINNED BRASS)	175149-3
175153-2	—	錫めき溶黄銅 (PRE TINNED BRASS)	175149-2
175153-1	—	錫めき溶銅合金 (PRE TINNED COPPER ALLOY)	175149-1
パラ状端子型番 (L.P. P/N)	仕上 (FINISH)	材 料 (MATERIAL)	型 番 (P/N)

		TE Connectivity	
絶縁被覆線径 (WIRE RANGE) 0.12-0.35mm (AWG #26-#22)	絶縁被覆 (INSULATION DIA) 1.2 ~ 2 mm	品名 (NAME) (TAB CONTACT AMP. UNIVERSAL POWER CONN.) 77-コンタクト, アンバーユニバーサルパワー-コネクタ	
材料 (MATERIAL) 表参照	仕様 (SPEC.) 表参照	寸法 (DIM.) 1PC = ±0.2 2PC = ±0.3	
C2 REV ECR M-006821 C1 REVISED PER ECO-11-005030 LTR 2E (REVISION RECORD)	RK HMR DR. 2011.11.14 CHK. 2011.11.14	仕様 (SPEC.) B J 5-1	型番 (P/N) C-175149 REV. C2 SHEET

単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DATE