## VM Desktop

## USB multifunction controllers

Distinctive features and specifications



- 3 axis joystick for PTZ control
- 27 programmable pushbuttons
- USB 1.1 HID compliant "game controller"
- ☐ Jog/shuttle dial
- LED backlit and tactile pushbutton options
  - Functions determined by controlled application
- Joystick performance: Hall effect three axis joystick
  - X/Y/Z for positioning control
- Joystick travel: 36° for X and Y axis
  - 60° for Z axis
- Centering: Single spring, omni-directional
- Joystick shaft: Stainless steel
- Joystick boot: Neoprene
- Joystick handle: Glass filled nylon
- Jog/shuttle performance:
  - Spring loaded shuttle ring travel ±40°
  - Smooth action knob rotates 360°
- Pushbutton performance:
  - 27 programmable pushbuttons rated for 500,000 life cycles
  - Lighting: high efficiency LED
  - Pushbutton material: silicon
  - "Mouse" pushbuttons are rated for 10 million life cycles
- Desktop housing: High impact ABS
- Power: Via USB interface (5V DC)
  - Consumption 500mA max


Supplied by USB ports, per USB specification

• Operating conditions:

-25°C to +85°C (-13°F to +185°F)

- Approvals: EN 55024:1998, EN 55022,
  - FCC Part 15 Subpart B Class B
  - RoHs compliant
- Interface:USB port
  - Uses standard DirectX HID drivers
  - Connects directly to workstation PC
- Connectors: USB Type A Male
  - Cable Length: 2m (6ft. 6.8in)
- Systems support integration: Windows 7, Vista, XP, 2000, Windows 8, OSX, Linux
- Supported protocols:
  - USB HID 1.1 game controller
  - Direct X (Gaming Control)
  - Joystick: Three HID axis
  - Pushbuttons: 12 HID buttons
  - Uses standard DirectX HID drivers
  - Connects directly to workstation PC
- Environmental: For indoor use only
- Boxed weight: 1.33kg (47oz)

NOTE: All values are nominal.

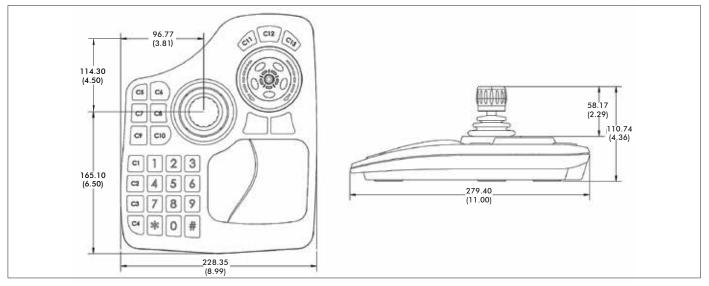

NOTES: Dimensions are in mm/(inch).

Product is supplied individually boxed with instruction booklet.

To order the VM Desktop with LED backlighting, refer to part number 100-590.

To order the VM Desktop with tactile switches, refer to part number 100-600.

Note: The company reserves the right to change specifications without notice.