


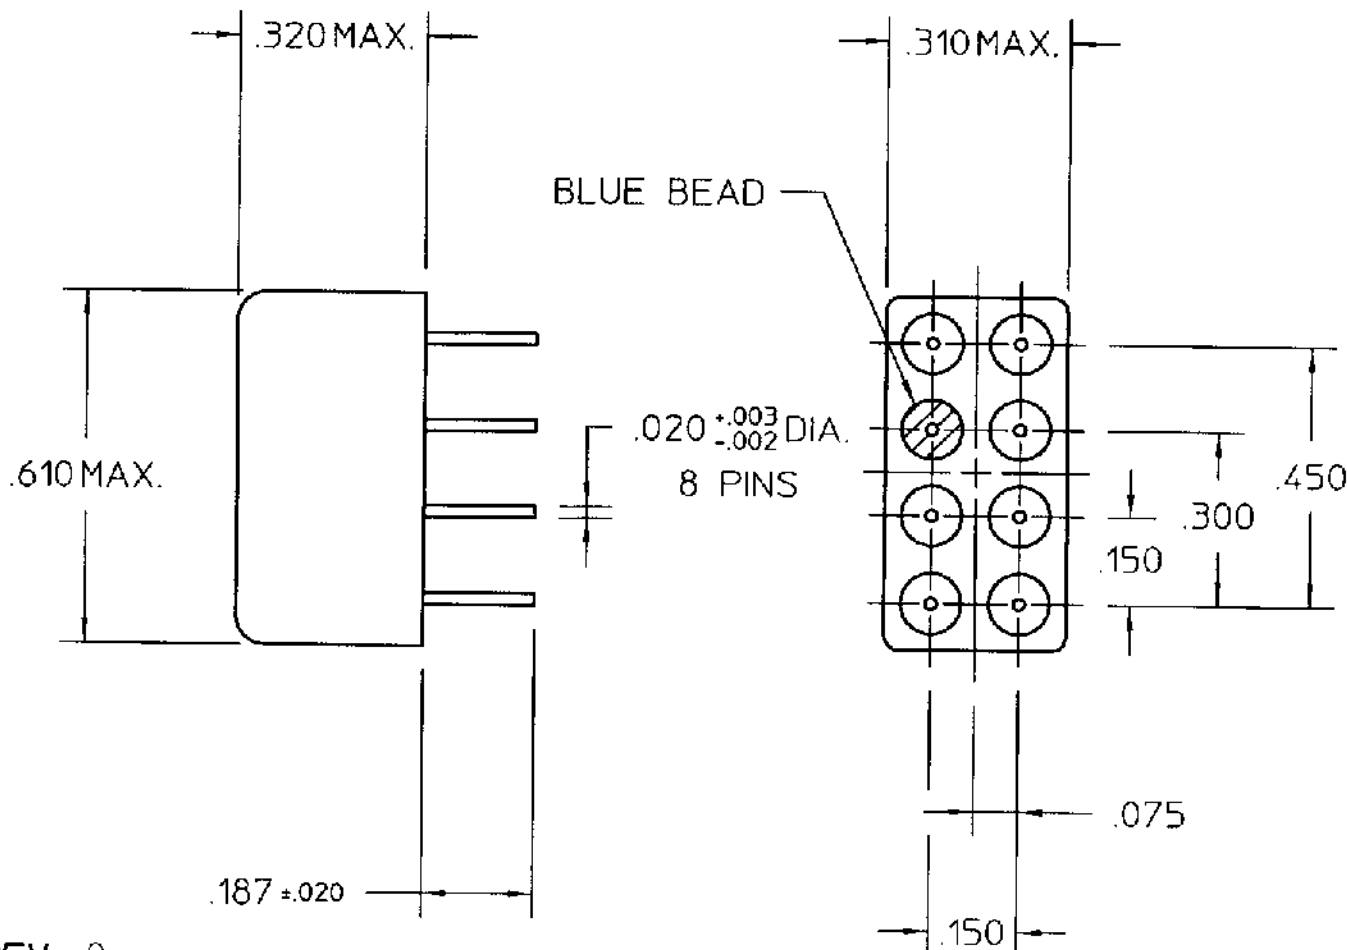

REV. 0

DCO 142658


COIL: @ 25°C
 RESISTANCE 140 OHMS ± 10%
 NOMINAL VOLTAGE 9.0 VDC
 MUST OPERATE 4.4 VDC
 MUST RELEASE 2.6 VDC MAX. 0.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION TIME 25 MS MAX.

CUSTOMER DATA SHEET

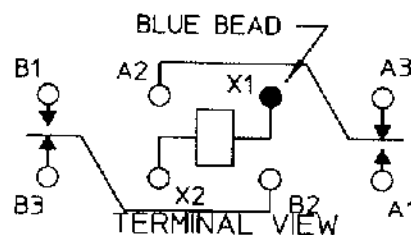

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. PBB 1/25/01 CK. TLG 01-25-00

ICII Technologies™
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M39016/13-075P REV.

3SBC RELAY

3SBC2020A2