

LOC		DIST		REVISIONS				
F	LTR	DESCRIPTION			DATE	DWN	APVD	
	A	REVISED PER ECO-11-018956			27SEP2011	KH	DY	

D

C

B









A

D

C

B

A

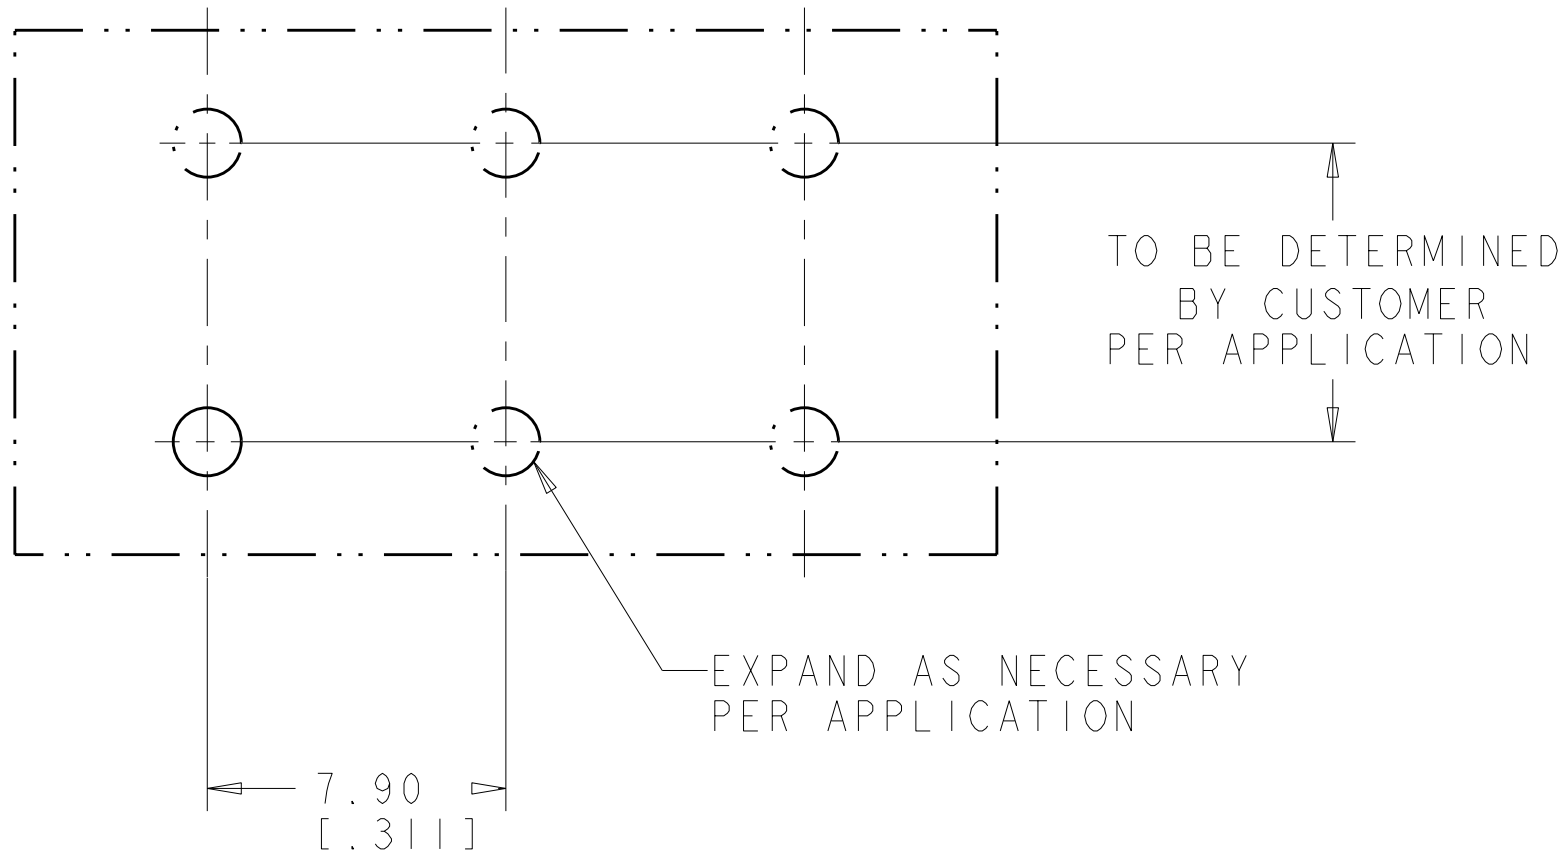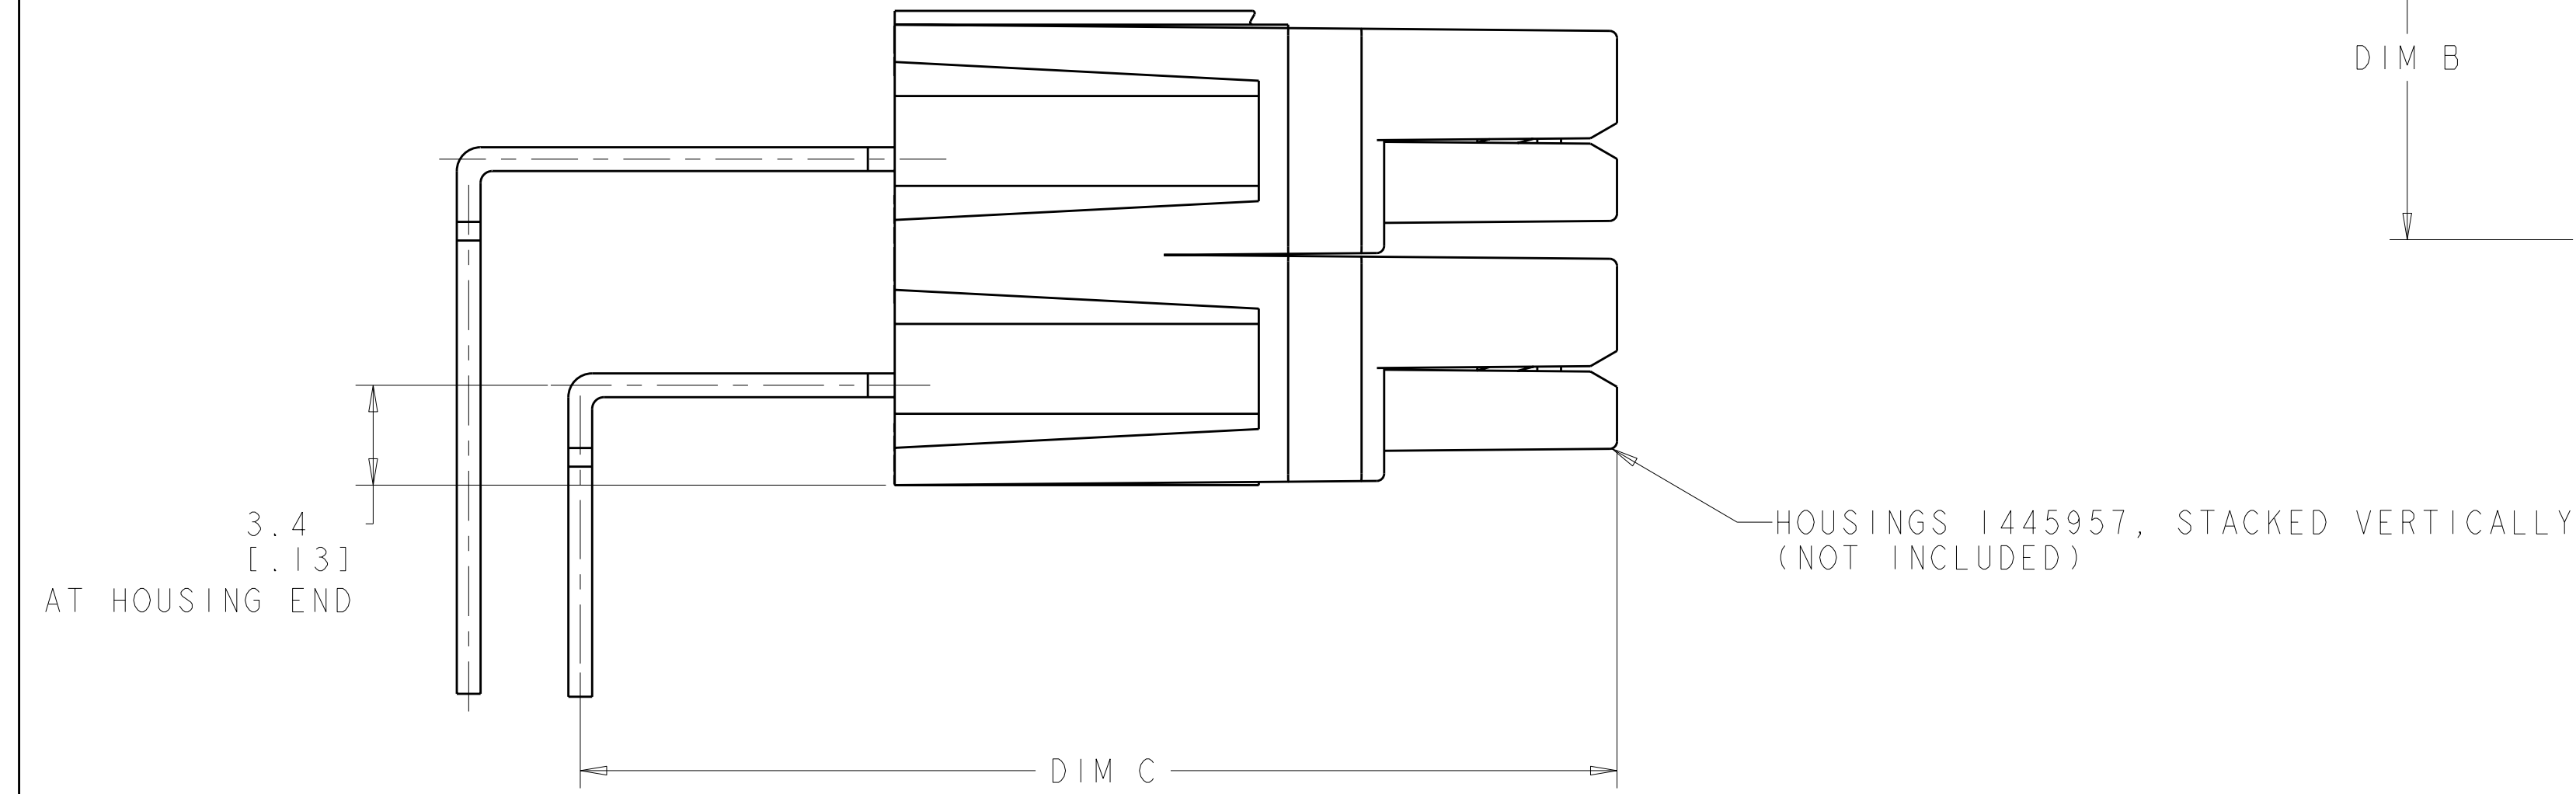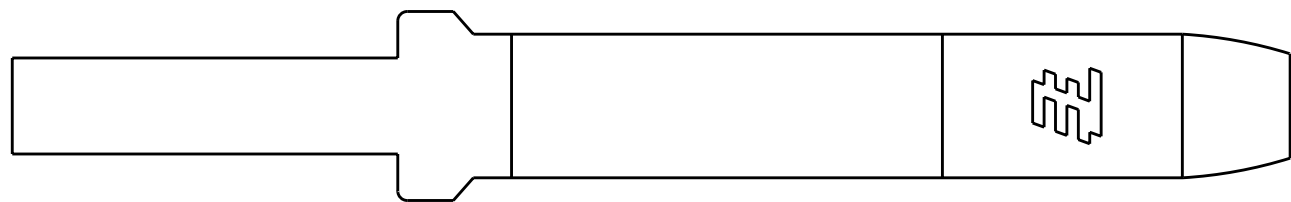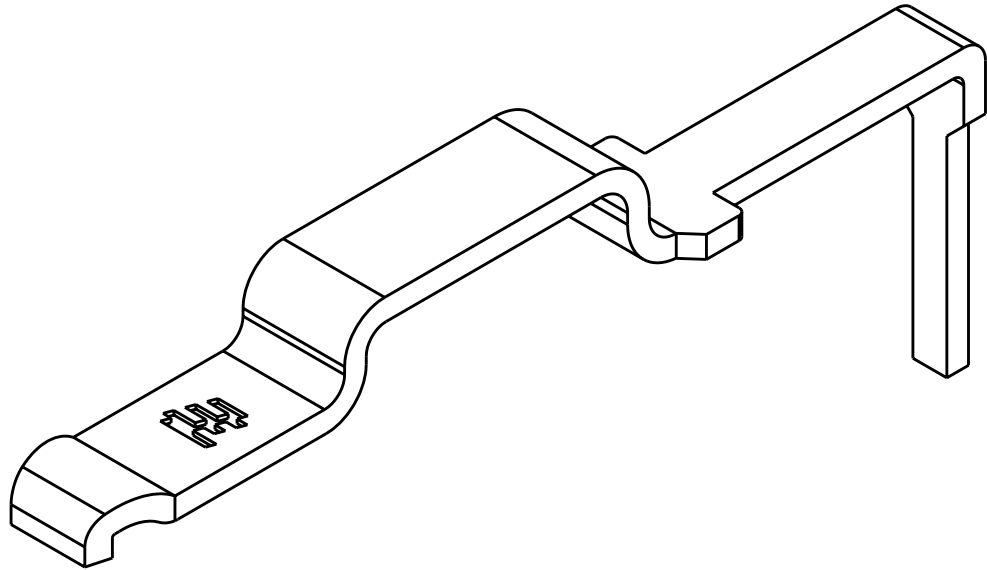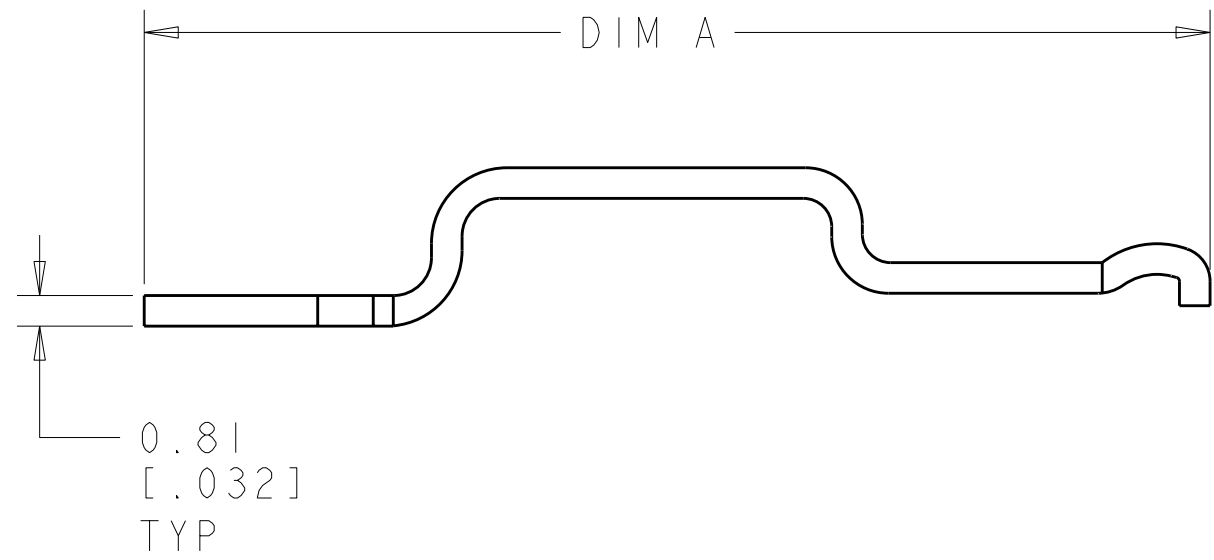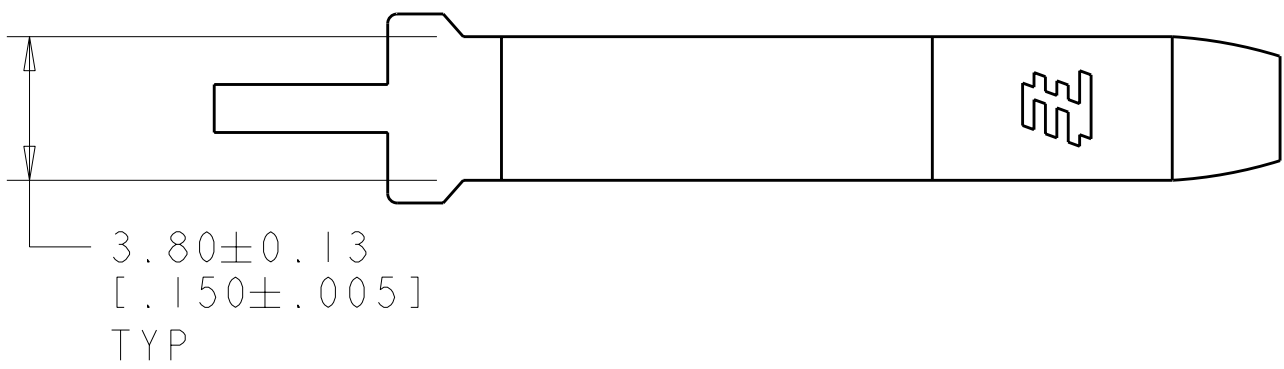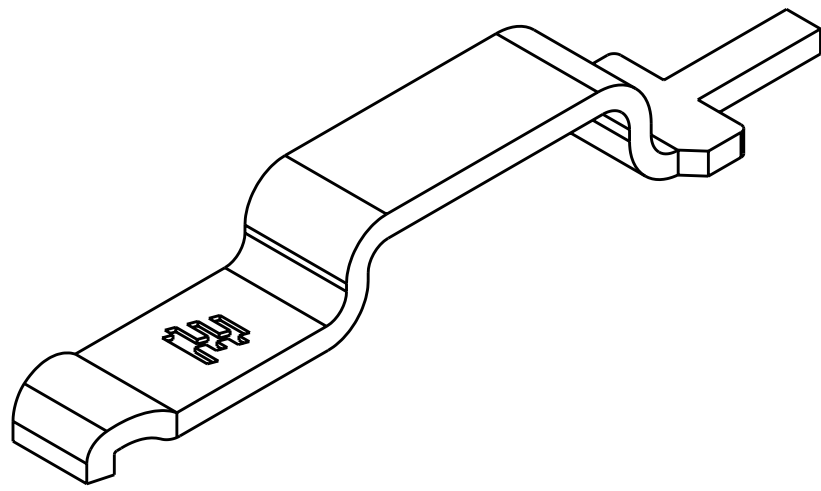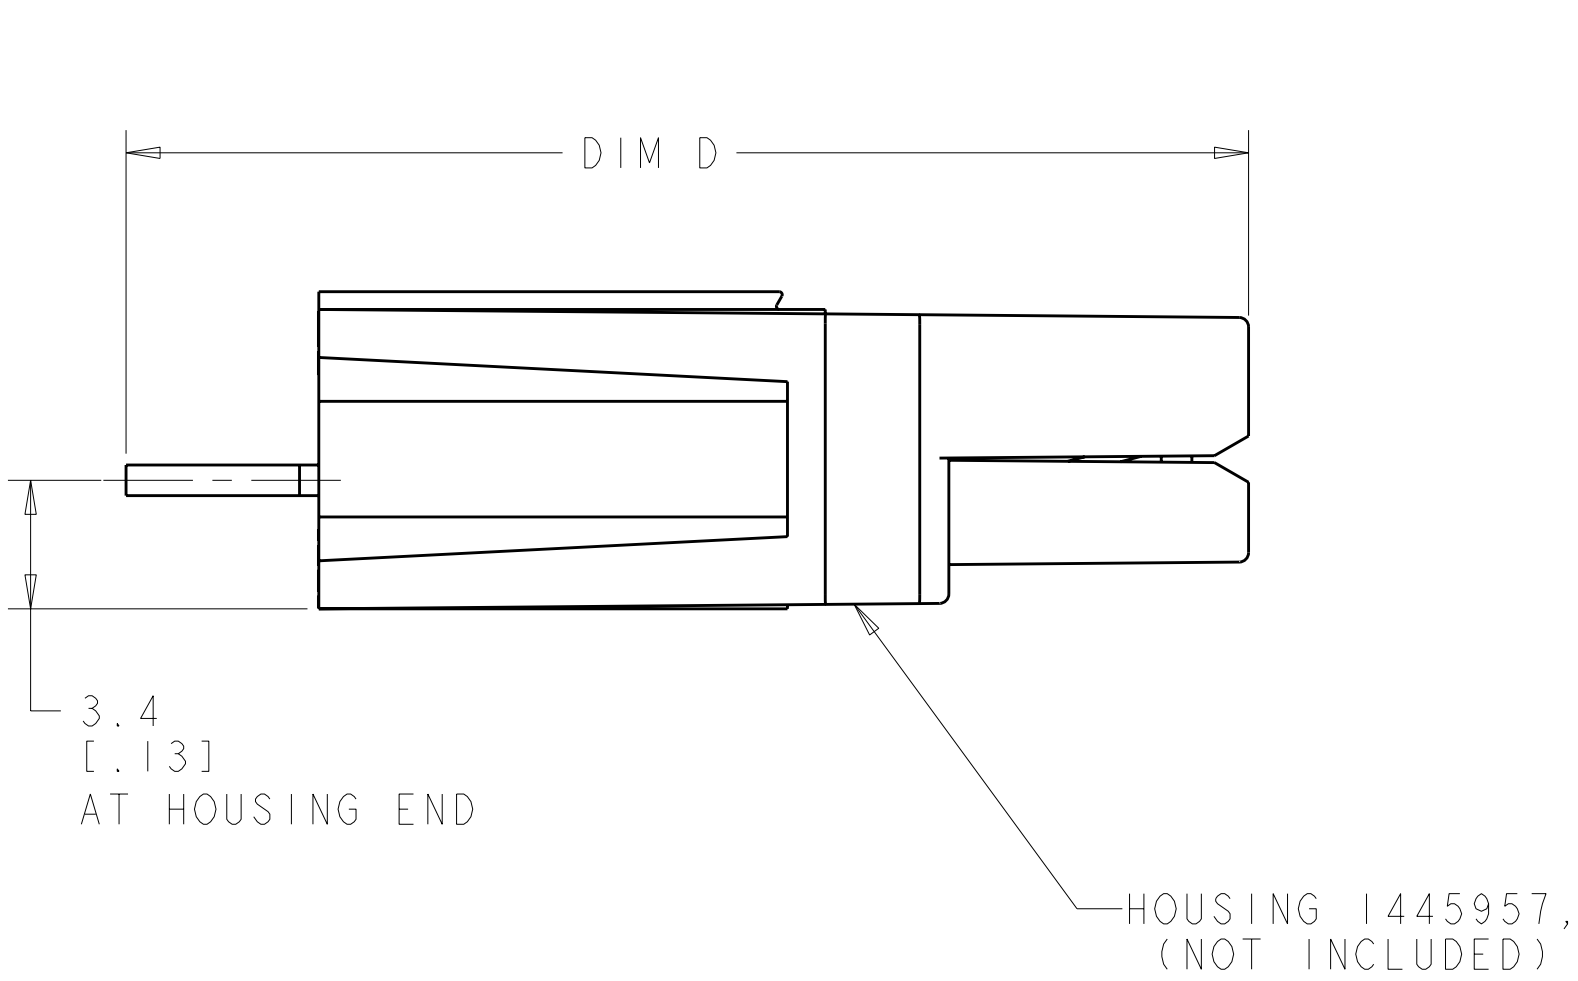

RECOMMENDED BOARD LAYOUT

437.32 [0.678]	0.00 [0.000]	38.60 [1.520]	17.80 [0.701]	36.80 [1.449]	1-1744128-2
380.24 [0.589]	0.00 [0.000]	34.50 [1.358]	10.20 [0.402]	33.00 [1.299]	1-1744128-1
395.93 [0.614]	56.40 [2.220]	56.40 [2.220]	0.00 [0.000]	54.90 [2.161]	1744128-3
347.26 [0.538]	44.70 [1.760]	44.70 [1.760]	0.00 [0.000]	43.20 [1.701]	1744128-2
285.50 [0.443]	29.70 [1.169]	29.70 [1.169]	0.00 [0.000]	28.20 [1.110]	1744128-1
SURFACE AREA	DIM D	DIM C	DIM B	DIM A	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER 29JUL2008	 TE Connectivity				
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 29JUL2008					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. BOSSI 29JUL2008	NAME				
		PCB CONTACT, 25 AMP, POWER SERIES					
MATERIAL COPPER	FINISH BRIGHT TIN	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		APPLICATION SPEC	A100779	C=1744128			
WEIGHT		-					
CUSTOMER DRAWING							
SCALE		5:1	SHEET	1	OF	1	REV