








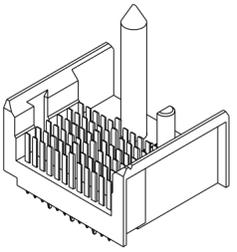











10135278 - 10X LF

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

SEE NOTE 2

LETTER DESIGNATION REPRESENTED IN DASH NUMBER

MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 3)	N	J (NO KEY)	A	B	C	D	E	F	G	H	
	NO KEY NO GUIDE PIN										
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 2)	Z	Y (NO KEY)	P	Q	R	S	T	U	V	W	
	NO KEY NO GUIDE PIN										





NOT TOOLED
PRELIMINARY

spec ref	-	dr	Tao Zhan	201505/18	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	201603/14	chr	-	ecn no	-	rel level	Preliminary
TOLERANCES UNLESS OTHERWISE SPECIFIED		app	-	product family	AIRMAX VS2		cat. no.	-	Product - Customer Drw	sheet 1 of 4
surface	-	linear	0.X	±0.3	Amphenol FCI	AIRMAX VERTICAL HEADER PRESS-FIT, 4-PAIR, 72 POS, W/G	cat. no.	-	Product - Customer Drw	sheet 1 of 4
		0.XX	±0.15							
		0.XXX	±0.050							
		angular	0°	±2°	title		cat. no.		Product - Customer Drw	sheet 1 of 4
					dwg no	10135278	rev	1		

Amphenol FCI

© 2016 APCI

RIGHT POLARIZING WITH GUIDE

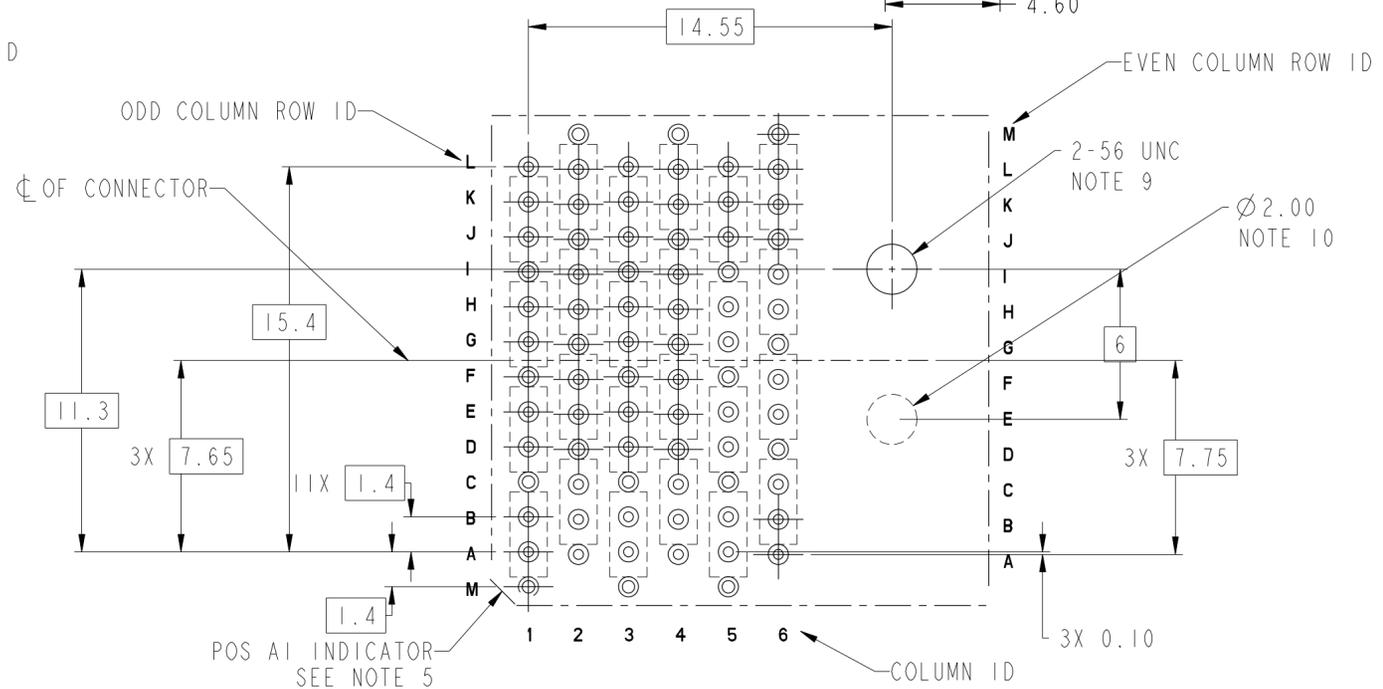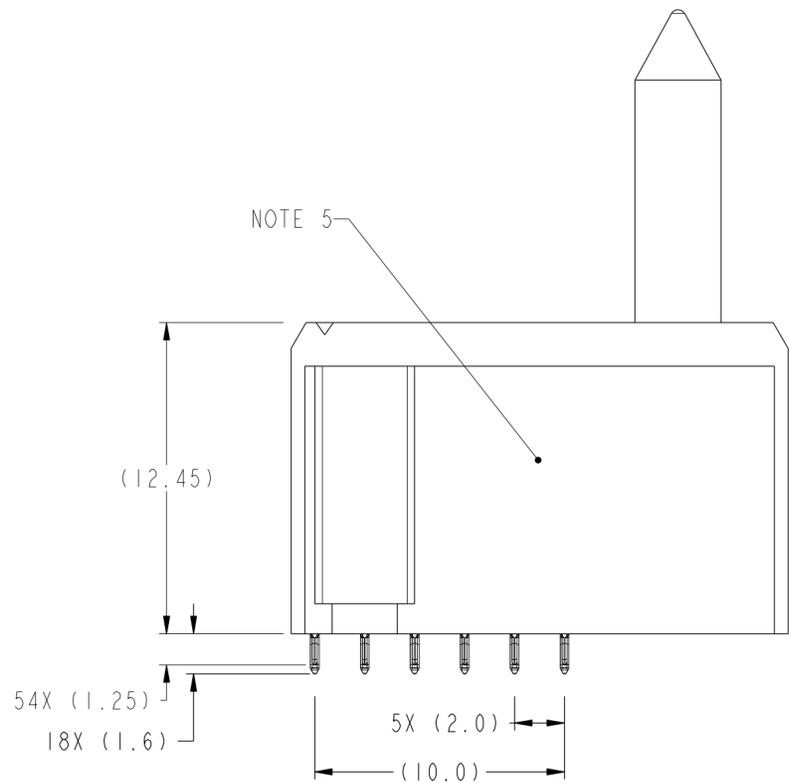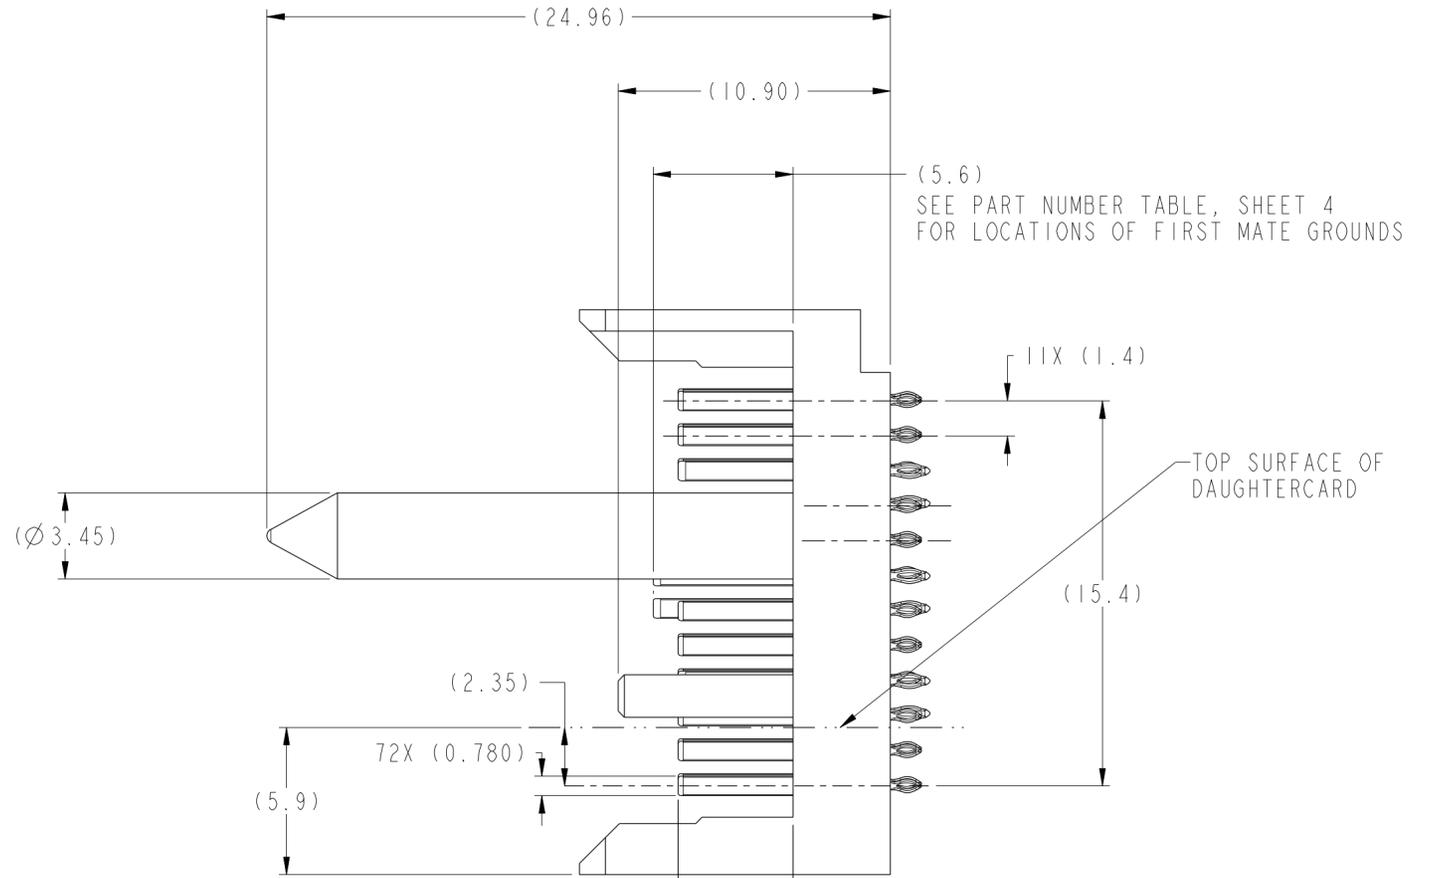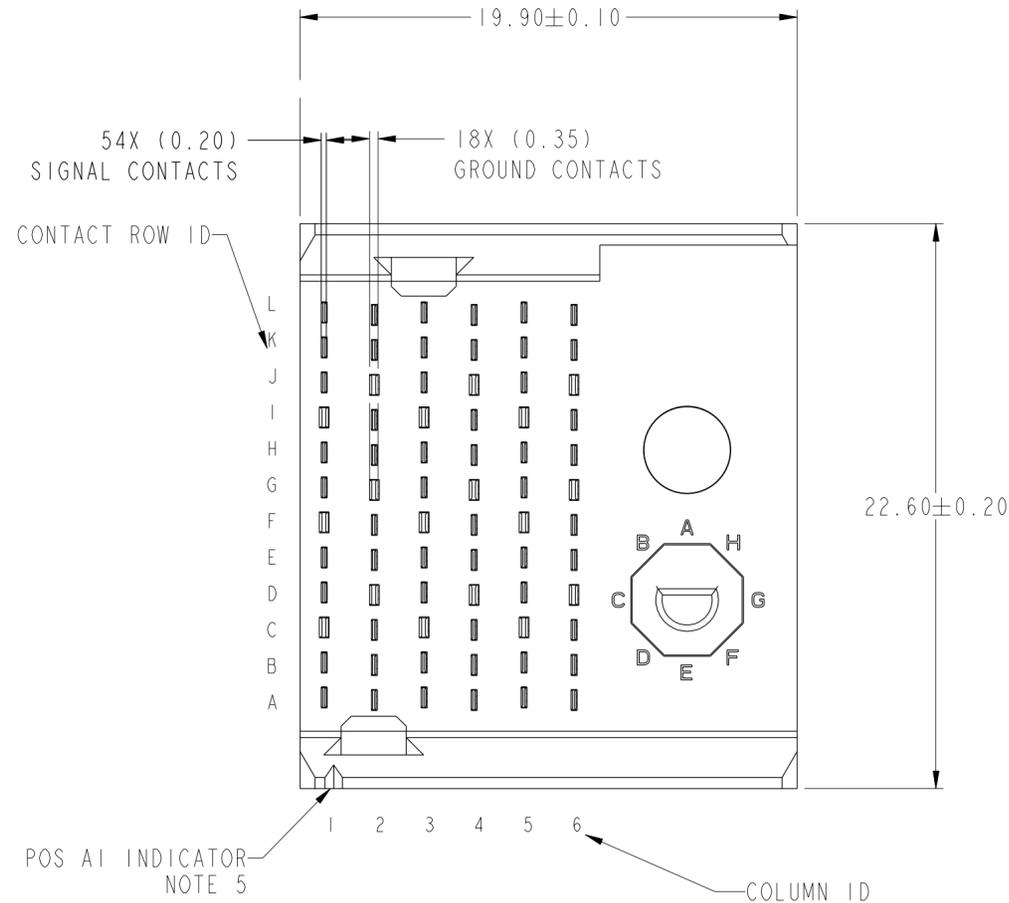

RECOMMENDED PCB DETAILS
SEE NOTE 6 & 11
SCALE 5:1





spec ref	-	dr	Tao Zhan	2015/05/18	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	2016/03/14	chr	-	ecn no	-	rel level	Preliminary
surface	-	appr	-	-	product family	AIRMAX VS2	cat. no.	-	Product - Customer Drw	sheet 2 of 4
ASME Y14.5	linear	0.X	±0.3	0.XX	±0.15	0.XXX	±0.050	angular	0°	±2°
Amphenol FCI							AIRMAX VERTICAL HEADER		10135278	
PRESS-FIT, 4-PAIR, 72 POS, W/G							1		1	

PRELIMINARY

Amphenol FCI

© 2016 AFCI

LEFT POLARIZING WITH GUIDE

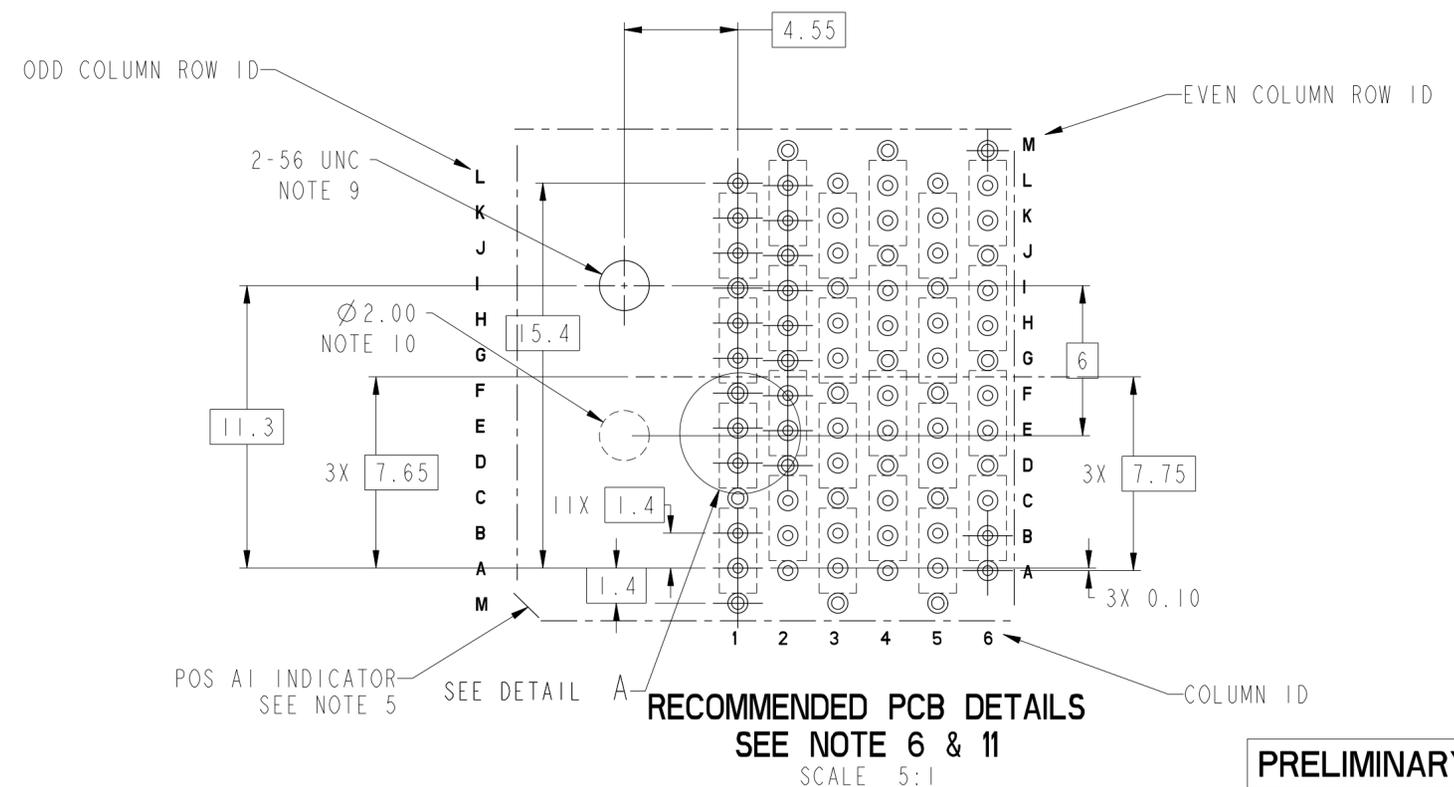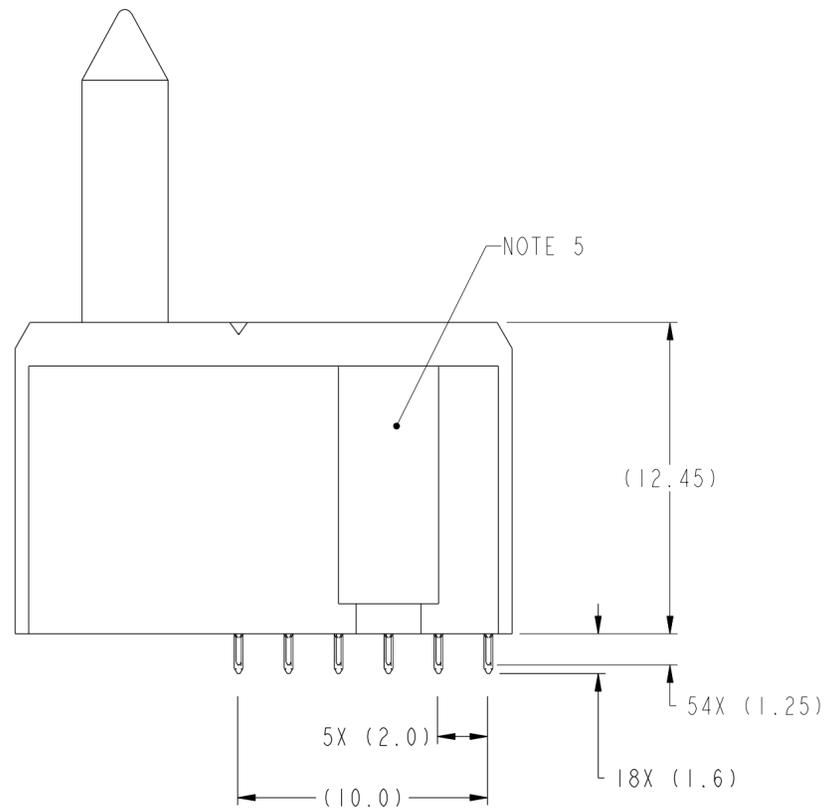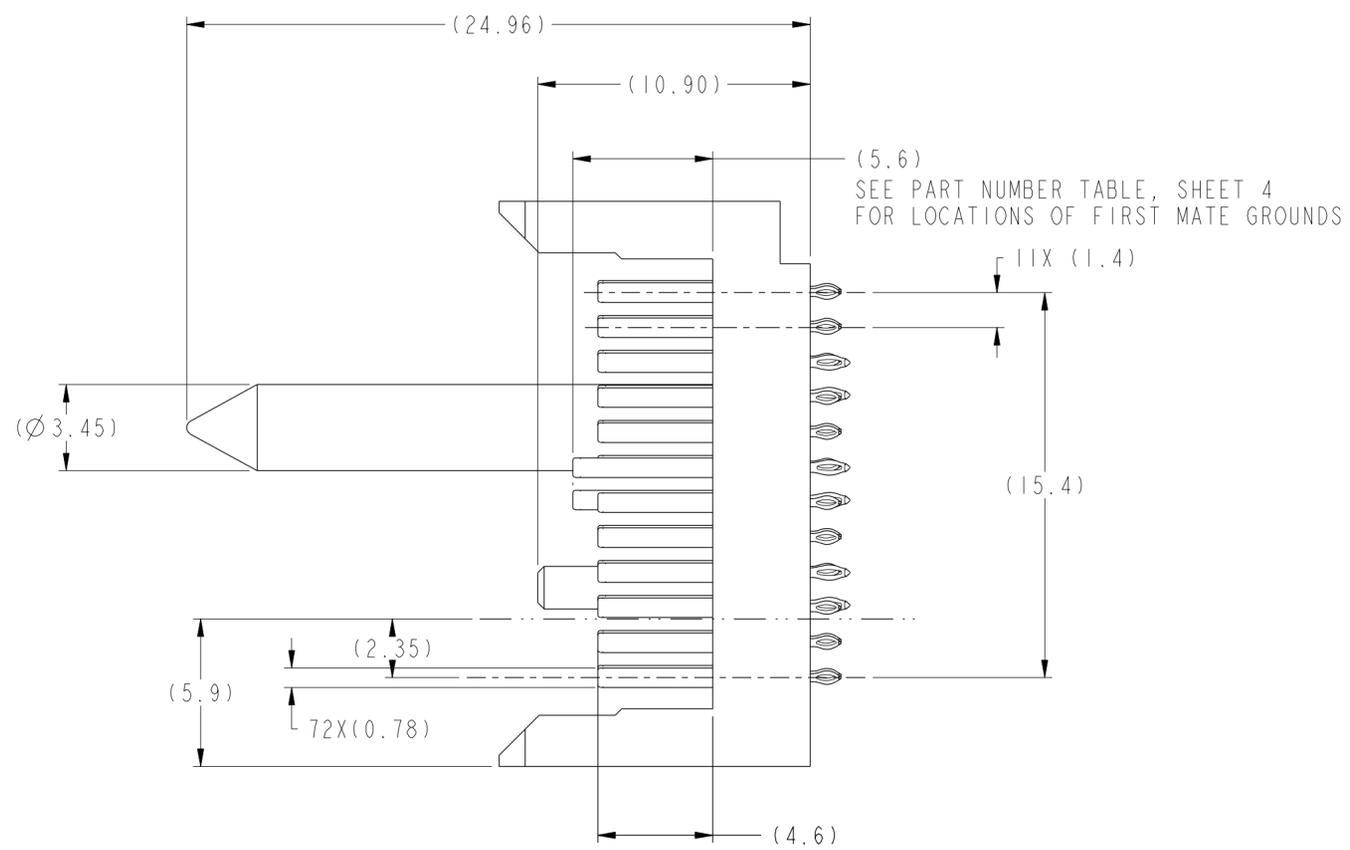
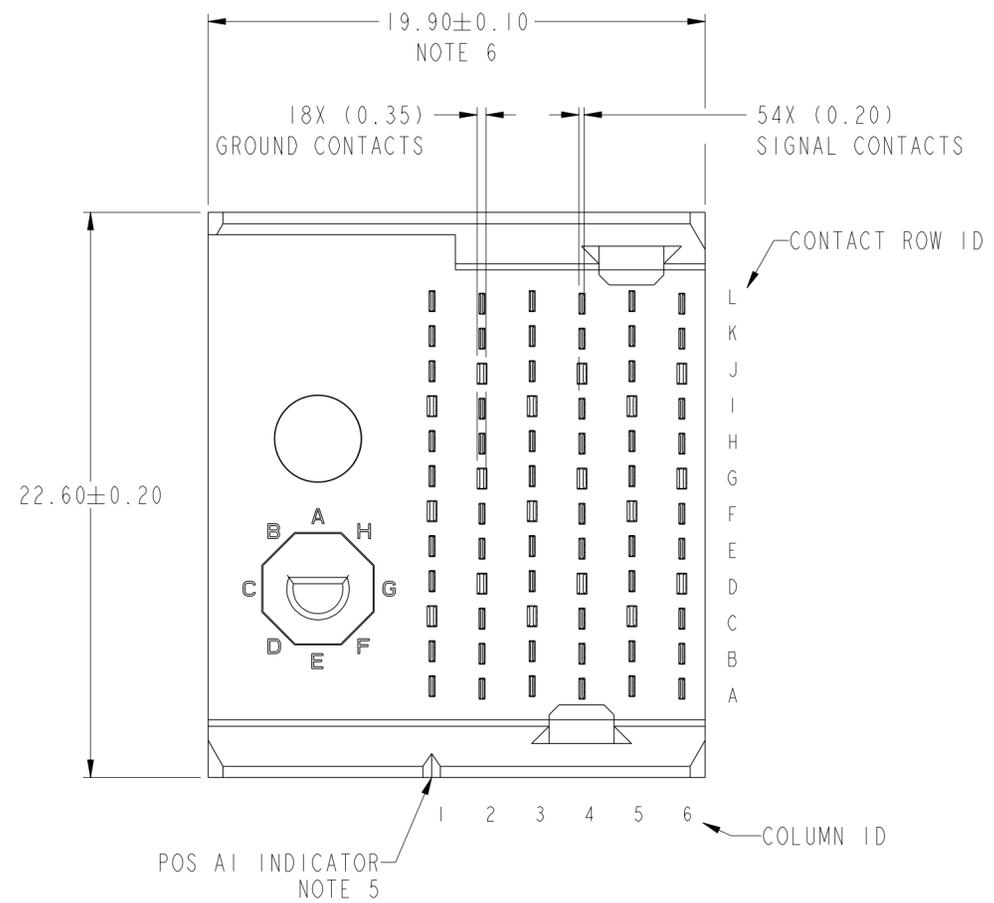


spec ref	-	dr	Tao Zhan	2015/05/18	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	2016/03/14	chr	-	ecn no	-	rel level	Preliminary
surface	-	appr	-	-	product family	AIRMAX VS2	cat. no.	-	Product - Customer Drw	sheet 3 of 4
ASME Y14.5	linear	0.X	±0.3	Amphenol FCI	AIRMAX VERTICAL HEADER	10135278	1			
		0.XX	±0.15		PRESS-FIT, 4-PAIR, 72 POS, W/G					
		0.XXX	±0.050							
	angular	0°	±2°							

Amphenol FCI

© 2016 AFCI


PART NUMBER	PRESS-FIT TAIL PLATING TYPE	FIRST MATE PIN LOCATIONS
10135278-10*LF	TIN OVER NICKEL (LEAD FREE)	F1, F3, F5 G2, G4, G6

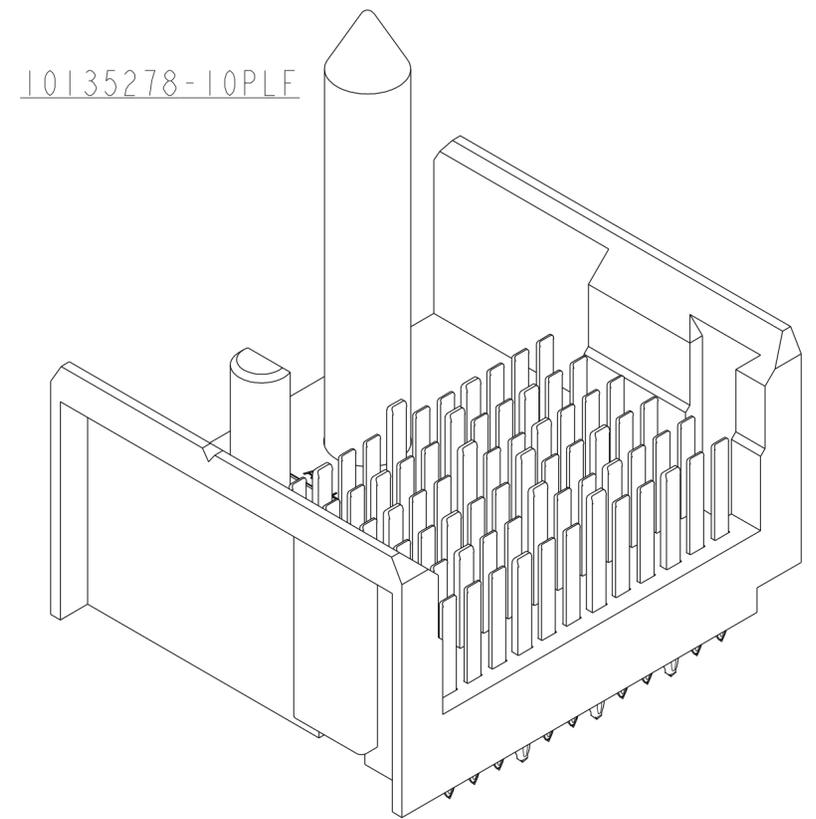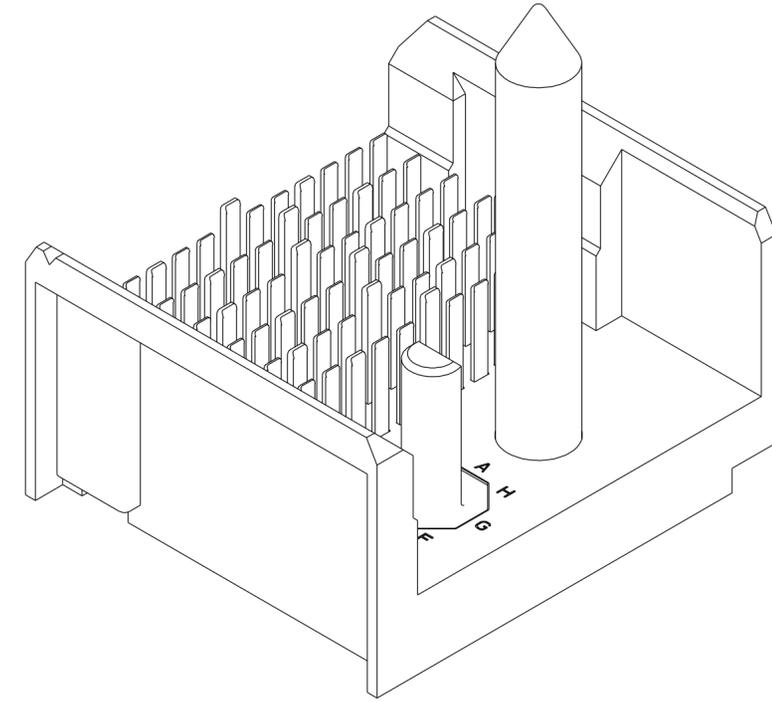

10135278-10ALF

NOTES:

1. CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
2. CONTACT PLATING:
SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-0956 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
PRESS-FIT TAILS: SEE TABLE
3. PRODUCT SPECIFICATION: GS-12-239.
4. APPLICATION SPECIFICATION: GS-20-035.
5. CONNECTOR OUTLINE WITH HOUSING POS AI INDICATOR MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
6. REFER TO CUSTOMER DRAWING 10104444 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.
7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
8. PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
9. THE SCREW THREAD ON THE CONNECTOR IS 2-56 UNC -2B TAP 8.60 MM, #50 DRILL (1.778) TAP 8.80 MM.
10. NO CIRCUIT IN THIS AREA SURFACE.
11. THE OUTER VIAS IN COLUMN M ARE OPTIONAL. IF ADDED THESE HOLES PROVIDE GROUND SYMMETRY THROUGH THE PCB. NO CONNECTOR EONS WILL BE PRESSED INTO THESE HOLES.

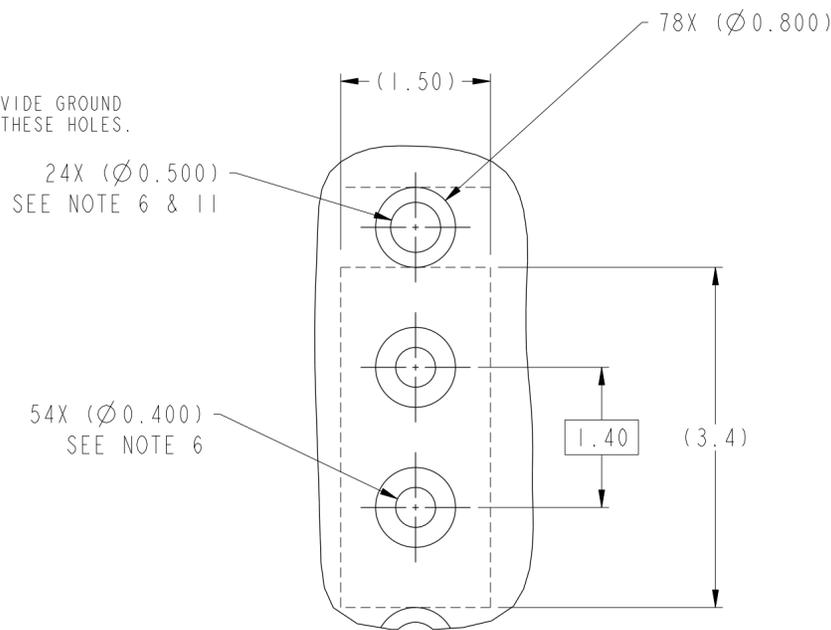

DETAIL A
SCALE 20:1

spec ref	-	dr	Tao Zhan	201505/18	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	201603/14	chr	-	ecn no	-	rel level	Preliminary
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	-	-	product family	AIRMAX VS2	cat. no.	10135278	rev	1
surface	-	linear	0.X	±0.3	Amphenol FCI		AIRMAX VERTICAL HEADER		Product - Customer Drw	
			0.XX	±0.15	PRESS-FIT, 4-PAIR, 72 POS, W/G		sheet 4 of 4			
			0.XXX	±0.050						
		angular	0°	±2°						

PRELIMINARY

Amphenol FCI

© 2016 APCI