
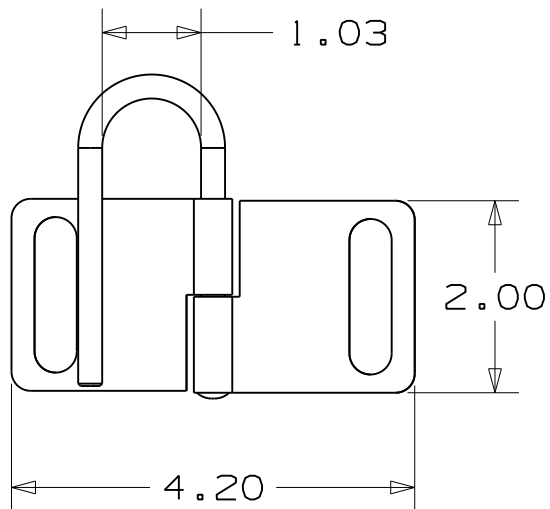
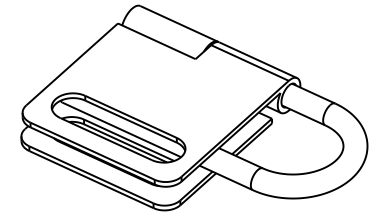
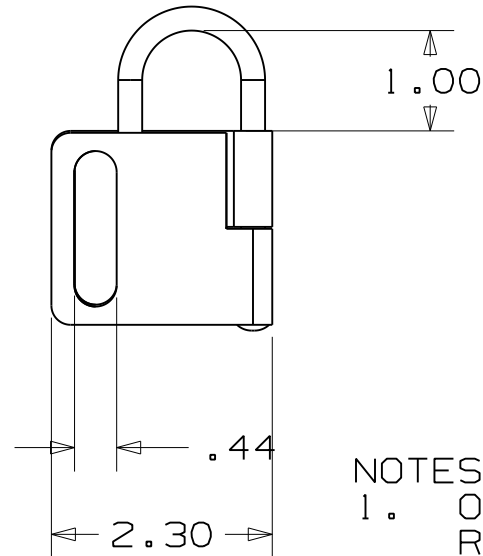


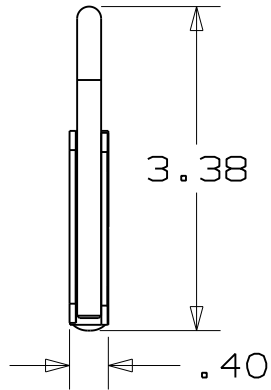

NOTES:

1. OPERATIONAL TEMPERATURE RANGE: -40°F (-40°C) TO 140°F (60°C)
2. STORAGE TEMPERATURE RANGE: -40°F (-40°C) TO 250°F (120°C)
3. CAUTION: TOUCHING METAL AT EXTREME TEMPERATURES CAN CAUSE BURNS AND OTHER INJURIES

CAD FILENAME/LAYERS		140019AA_DC_C10891/00A	
PANDUIT		CORP. TINLEY PARK, ILLINOIS	
PSL-HD1		CUSTOMER DRAWING	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .1 (.XX) ± .05		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY BSW		MAT'L: STEEL	
DATE 01/27/11		SCALE 1:2	
CHK'D		DRAWING NO. C10891	
		DWG A SIZE	

0	1/27/11	BSW		DRAWING RELEASE	6291				
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP	