
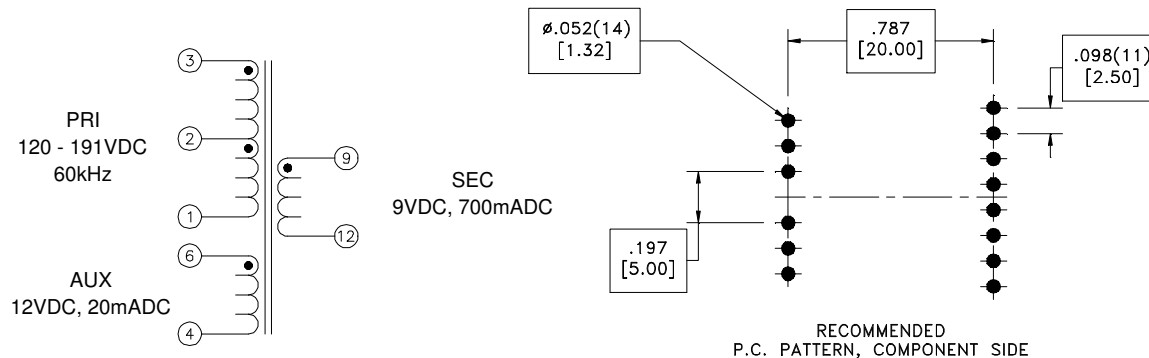


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

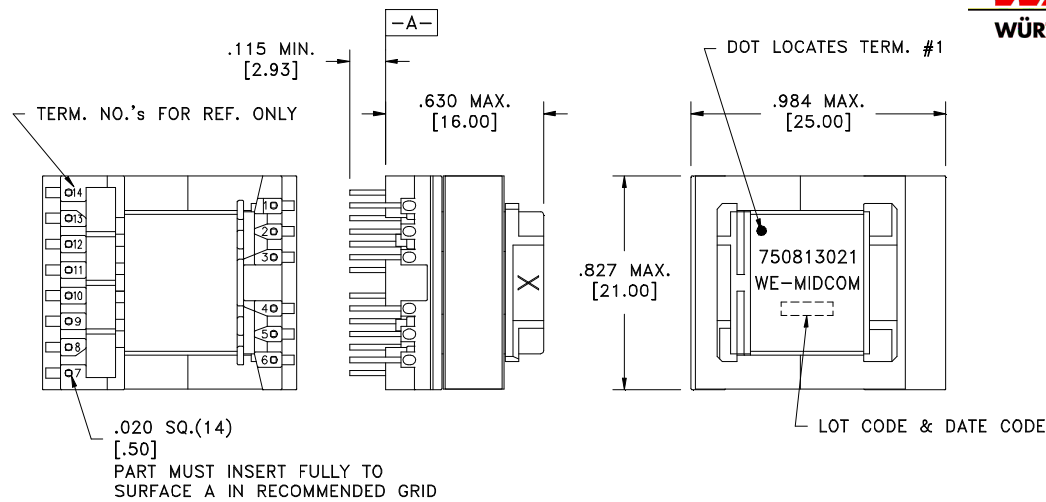

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):	3-1 , 0.840 Ohms $\pm$ 20%. 6-4 , 0.160 Ohms $\pm$ 20%. 9-12 , 0.022 Ohms $\pm$ 20%.
DIELECTRIC RATING:	3000VAC, 1 minute tested by applying 3750VAC for 1 second between pins 3-9(tie 1+6).
INDUCTANCE:	1.60mH $\pm$ 10%, 60kHz, 100mVAC, 0mADC, 3-1, Ls.
LEAKAGE INDUCTANCE:	55 μ H max., 100kHz, 100mVAC, 3-1(tie 9+12), Ls.
TURNS RATIO:	(3-1):(6-4) , (8.33):(1.00), $\pm$ 2%. (3-1):(9-12) , (11.11):(1.00), $\pm$ 2%. (3-2):(2-1) , (1):(1.00), $\pm$ 2%.
SATURATION CURRENT:	660mADC saturating current that causes 20% rolloff from initial inductance.

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1: - Reinforced insulation for a primary circuit at a working voltage of 250Vrms.

WE-Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified, tolerances are as follows: Angles: $\pm$ 1° Fractions: $\pm$ 1/64 Decimals: $\pm$.005(.127mm)		WE-Midcom, Inc.	
	Drawing Title Transformer		Drawing Number 750813021	Rev. 00
This drawing is dual dimensioned. Dimensions in brackets are in millimeters	Revisions: See Sheet 1 Engineer:EJK		Scale ----	Sheet 2 of 5 04/08/2010