

5

4

3

2





1

D

C

B

A

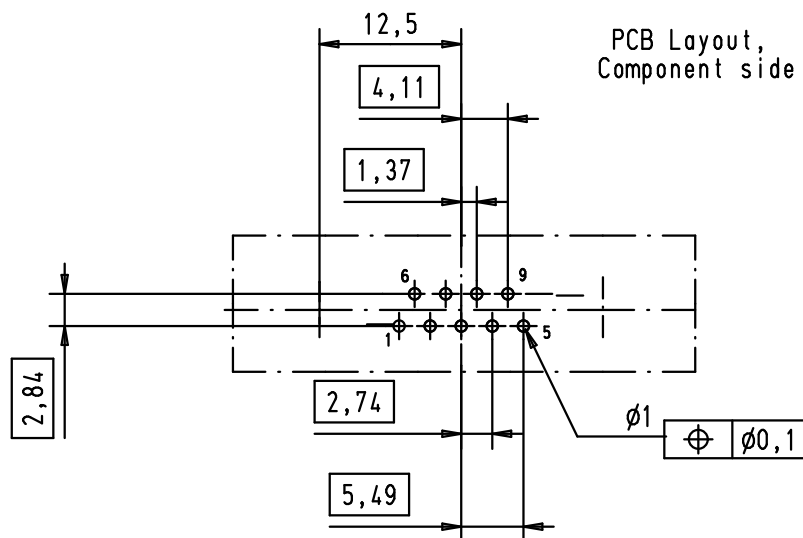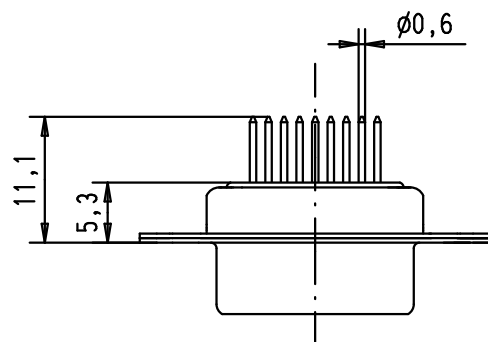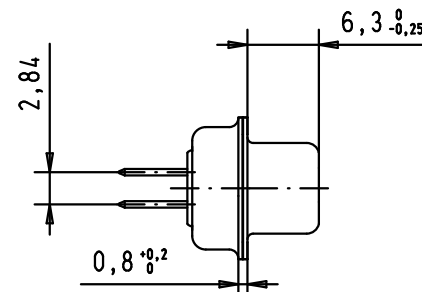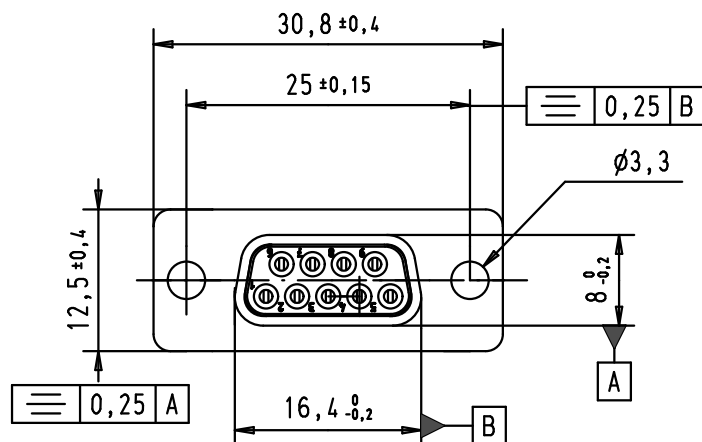


SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	$47\text{pf} \pm 20\%$
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	$>1\text{G}\Omega$

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	—
10	—
50	—
100	—
500	30dB
1000	35dB

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.	09/12/11	JB	
			Stand.			
36283	09/12/11	SD				
31894	29/04/04	AF				
31058	8-JUL-02	CV				
Mod.	Dat.	Name				

HARTING EURL
F-95972 ParisD-Sub, female, straight
9 Poles, turned solder
pin, fixing hole

TB 09641127210

Sub.

Ma?Mstab/
Scale

1.5:1

Blatt/ Page

1 / 1