


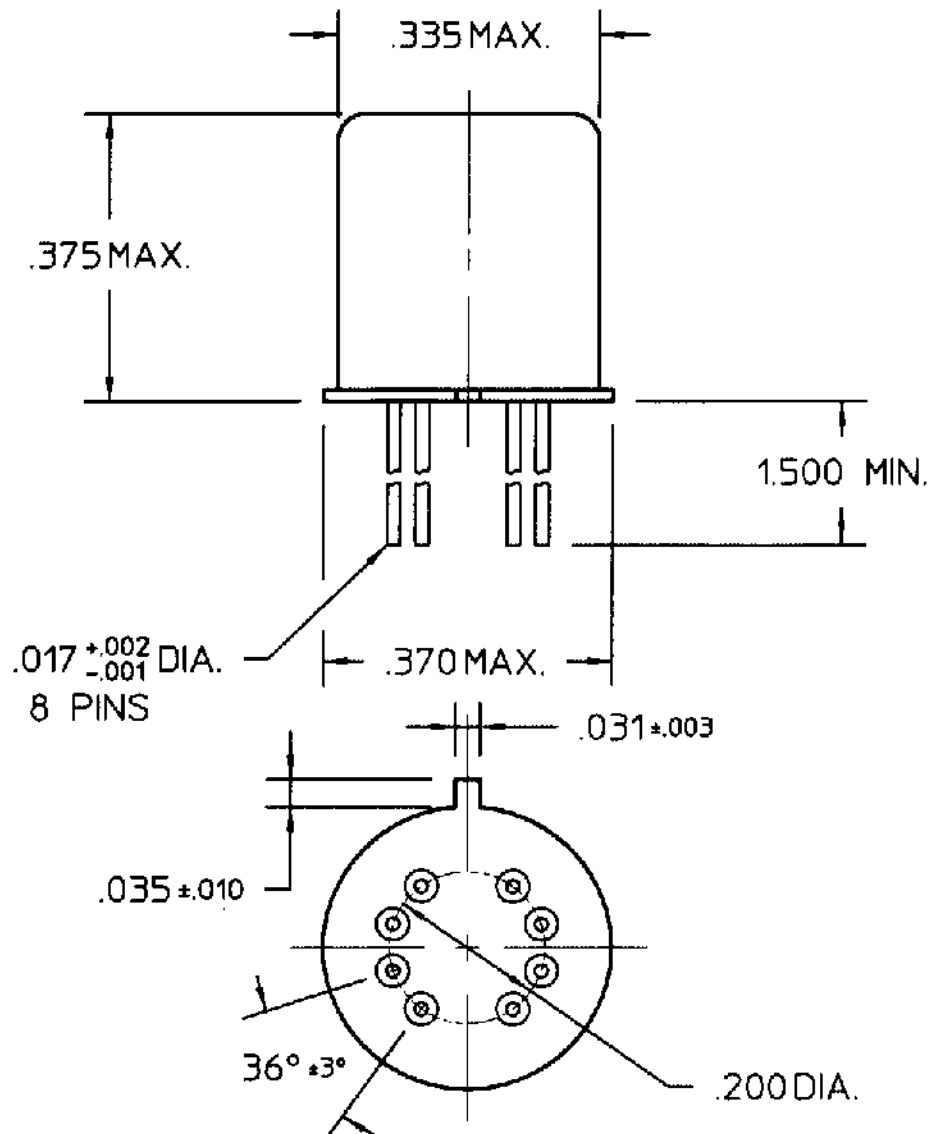

REV. 0

DCO 142074

COIL: @ 25°C
 RESISTANCE _____ 100 OHMS $\pm$ 10%
 NOMINAL VOLTAGE _____ 5.0 VDC
 MUST OPERATE _____ 2.6 VDC


MUST RELEASE _____ 1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 CPS TO _____ 3000 CPS @ _____ 30 g's
 SHOCK _____ 75 g's _____ 6 MS. DURATION
 TEMPERATURE _____ -65 °C TO _____ +125 °C

NOTES: _____ OPERATE TIME 4.0 MS MAX
 _____ RELEASE TIME 7.5 MS MAX
 _____ CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 6/6/00

CK. LERRY 6/6/00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. _____ QPL
 CUST. NO. M39016/16-017L REV. _____

JMSD RELAY

JMSWD-5XL