

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -



ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	15DEC2015	DW	CW
	A1	ECR-15-018472	21DEC2015	DW	CW




SCALE 1:2

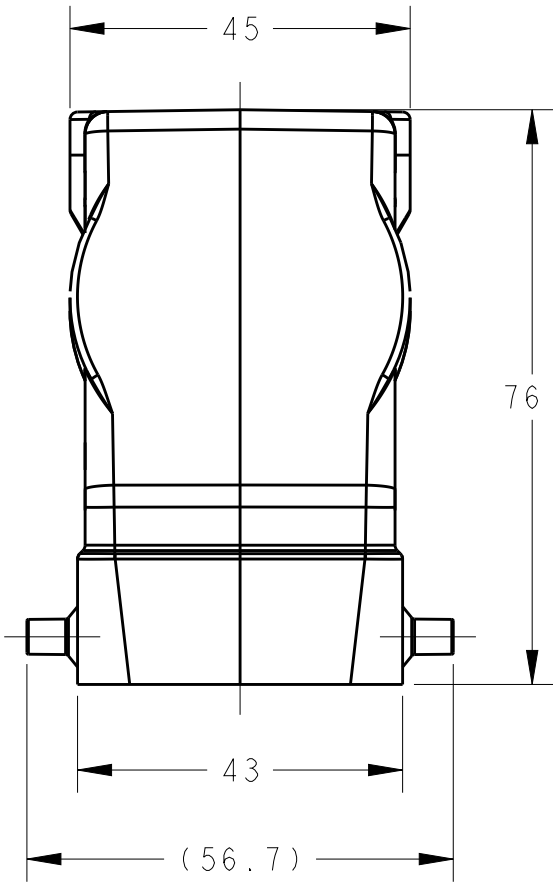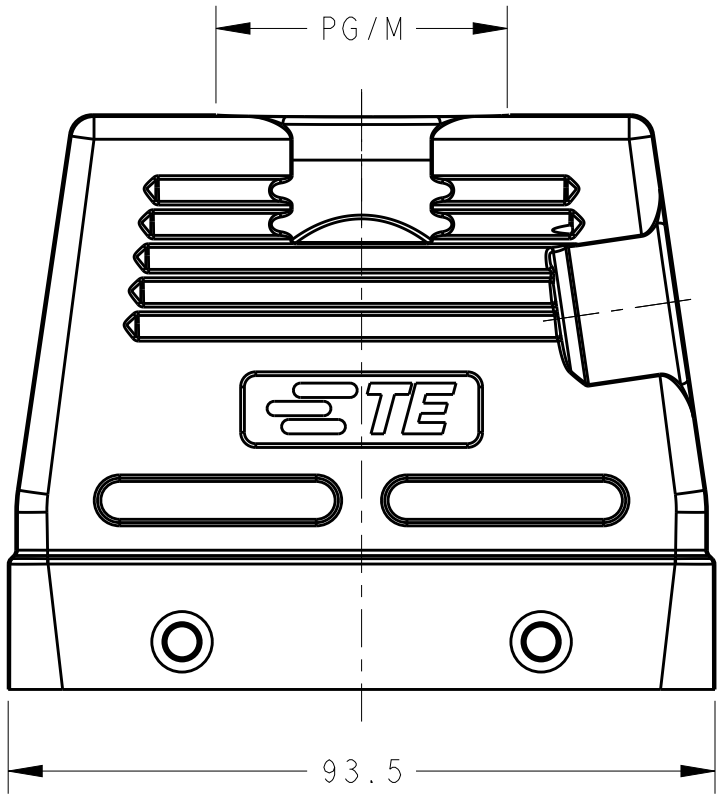

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
上壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

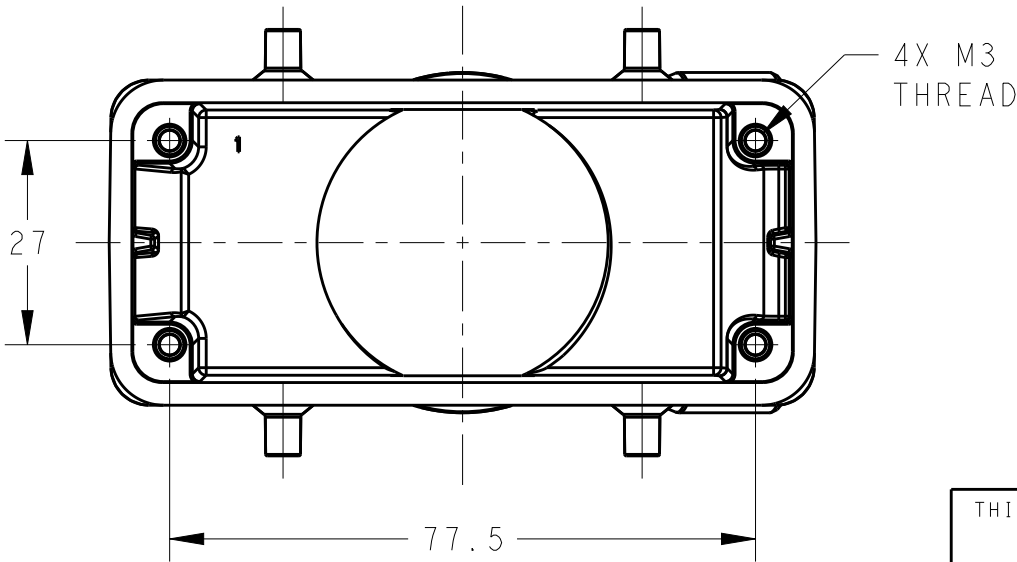

T1240160121-001	H16B-TGH-PG21	HIGH CONSTRUCTION	PG21
T1240160129-001	H16B-TGH-PG29		PG29
T1240160125-001	H16B-TGH-M25		M25
T1240160132-001	H16B-TGH-M32		M32
T1240160140-001	H16B-TGH-M40		M40
PART NUMBER	DESCRIPTION	TYPE	THREAD PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 15DEC2015 David Wang	 TE Connectivity	
DIMENSIONS: mm		CHK 15DEC2015 Chris Wang		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 15DEC2015 Xiang Xu		
MATERIAL		PRODUCT SPEC 108-137013	NAME H16B-TGH-M/PG	
		APPLICATION SPEC 114-137013		
		WEIGHT -	SIZE A3	CAGE CODE 00779
		Customer Drawing	DRAWING NO T12401601XX001	RESTRICTED TO -
			SCALE 1:1	SHEET 1 OF 1
				REV A1