
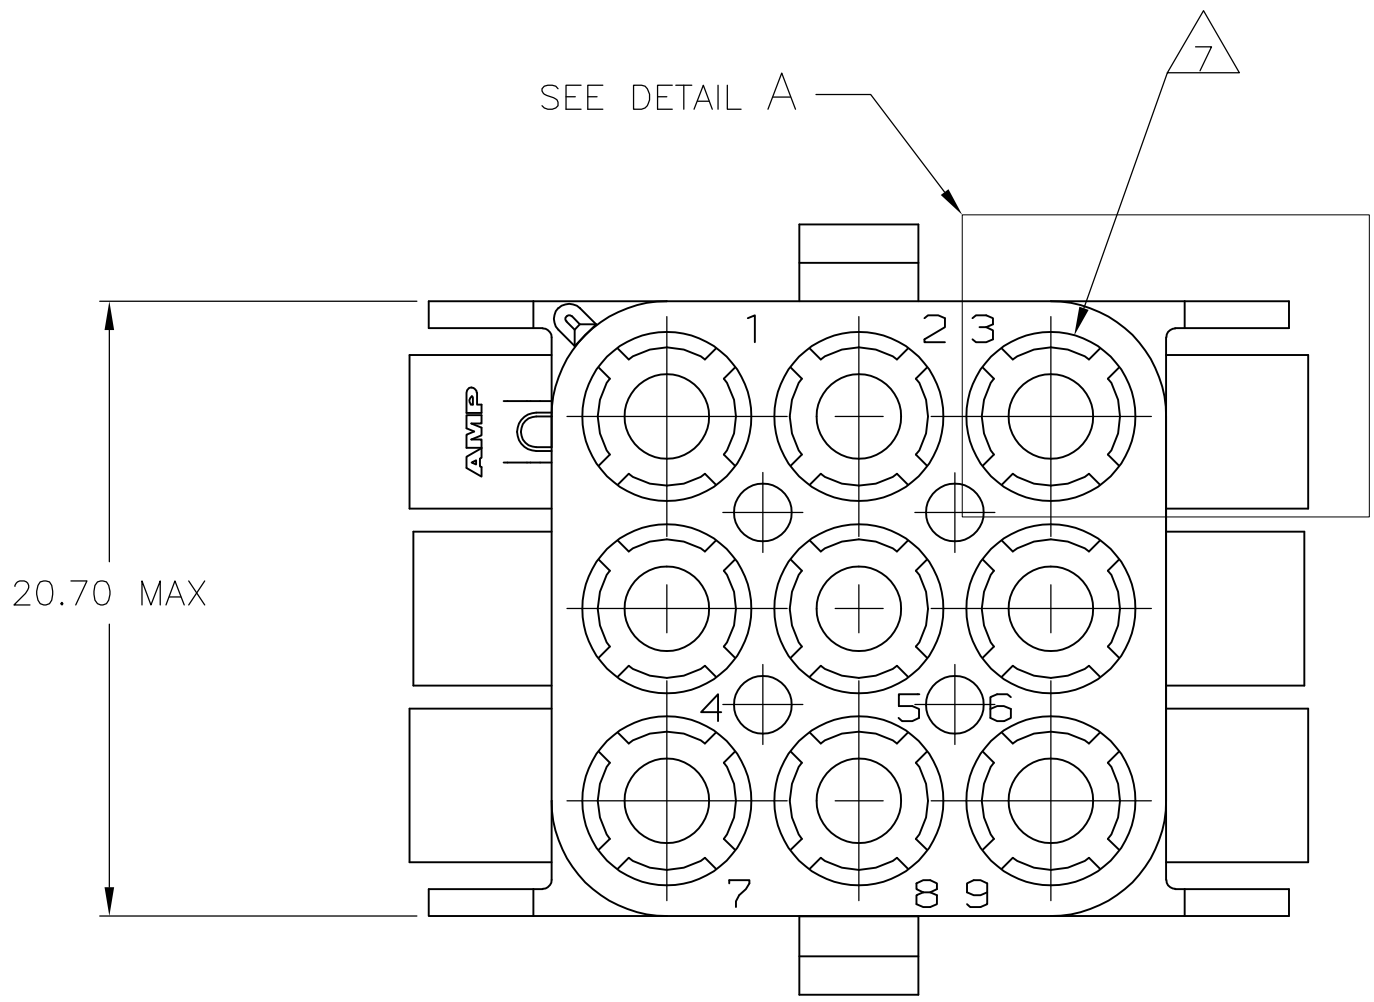
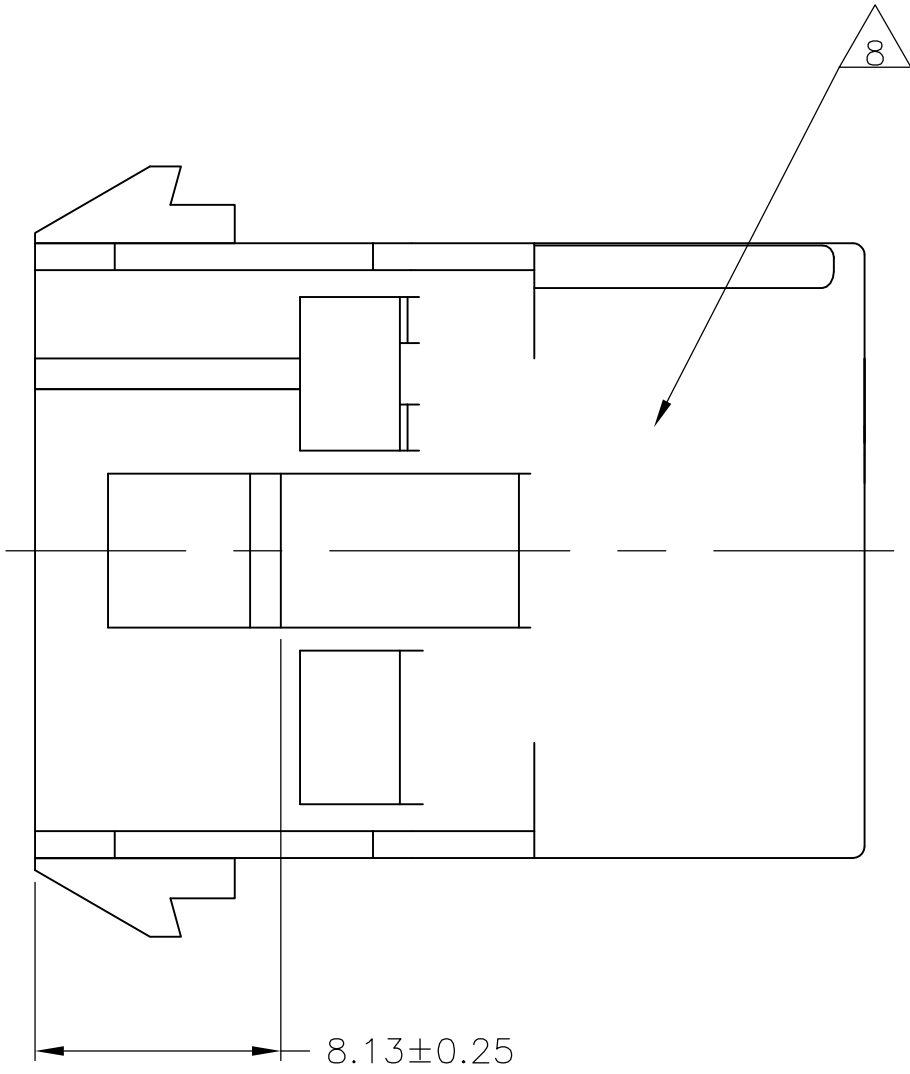





LOC	DIST	REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN
		AL1	REVISED	PER ECR-17-008392	26JUN2017	BW

D

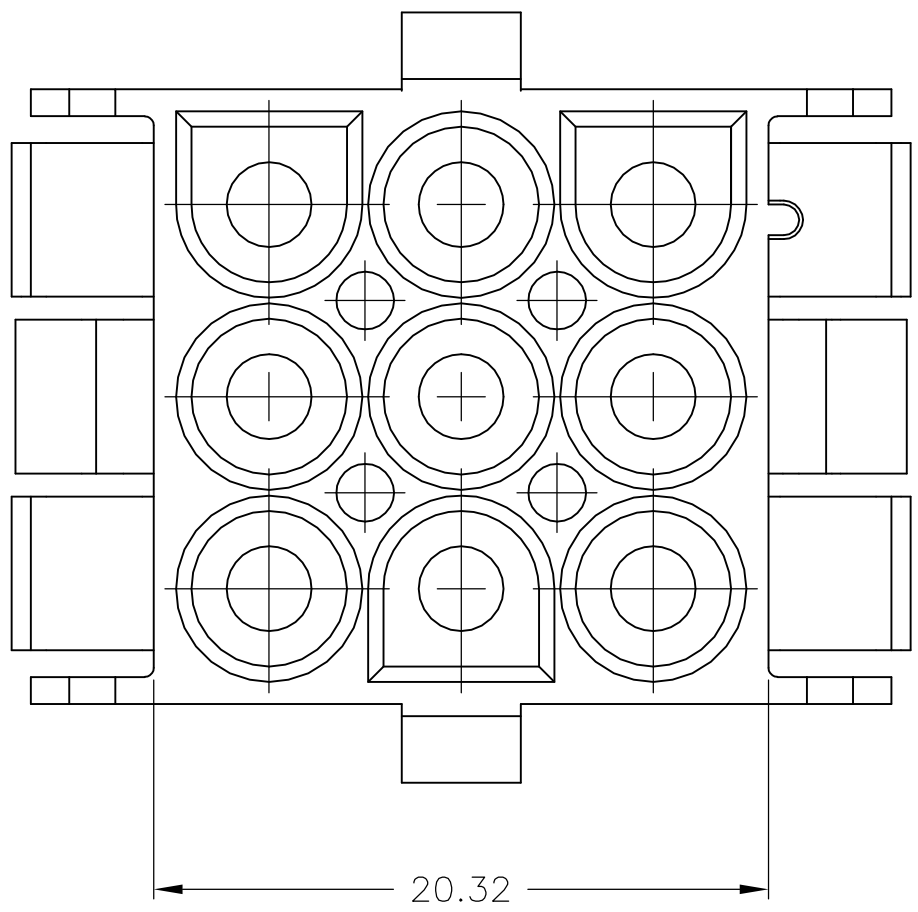


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
9. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

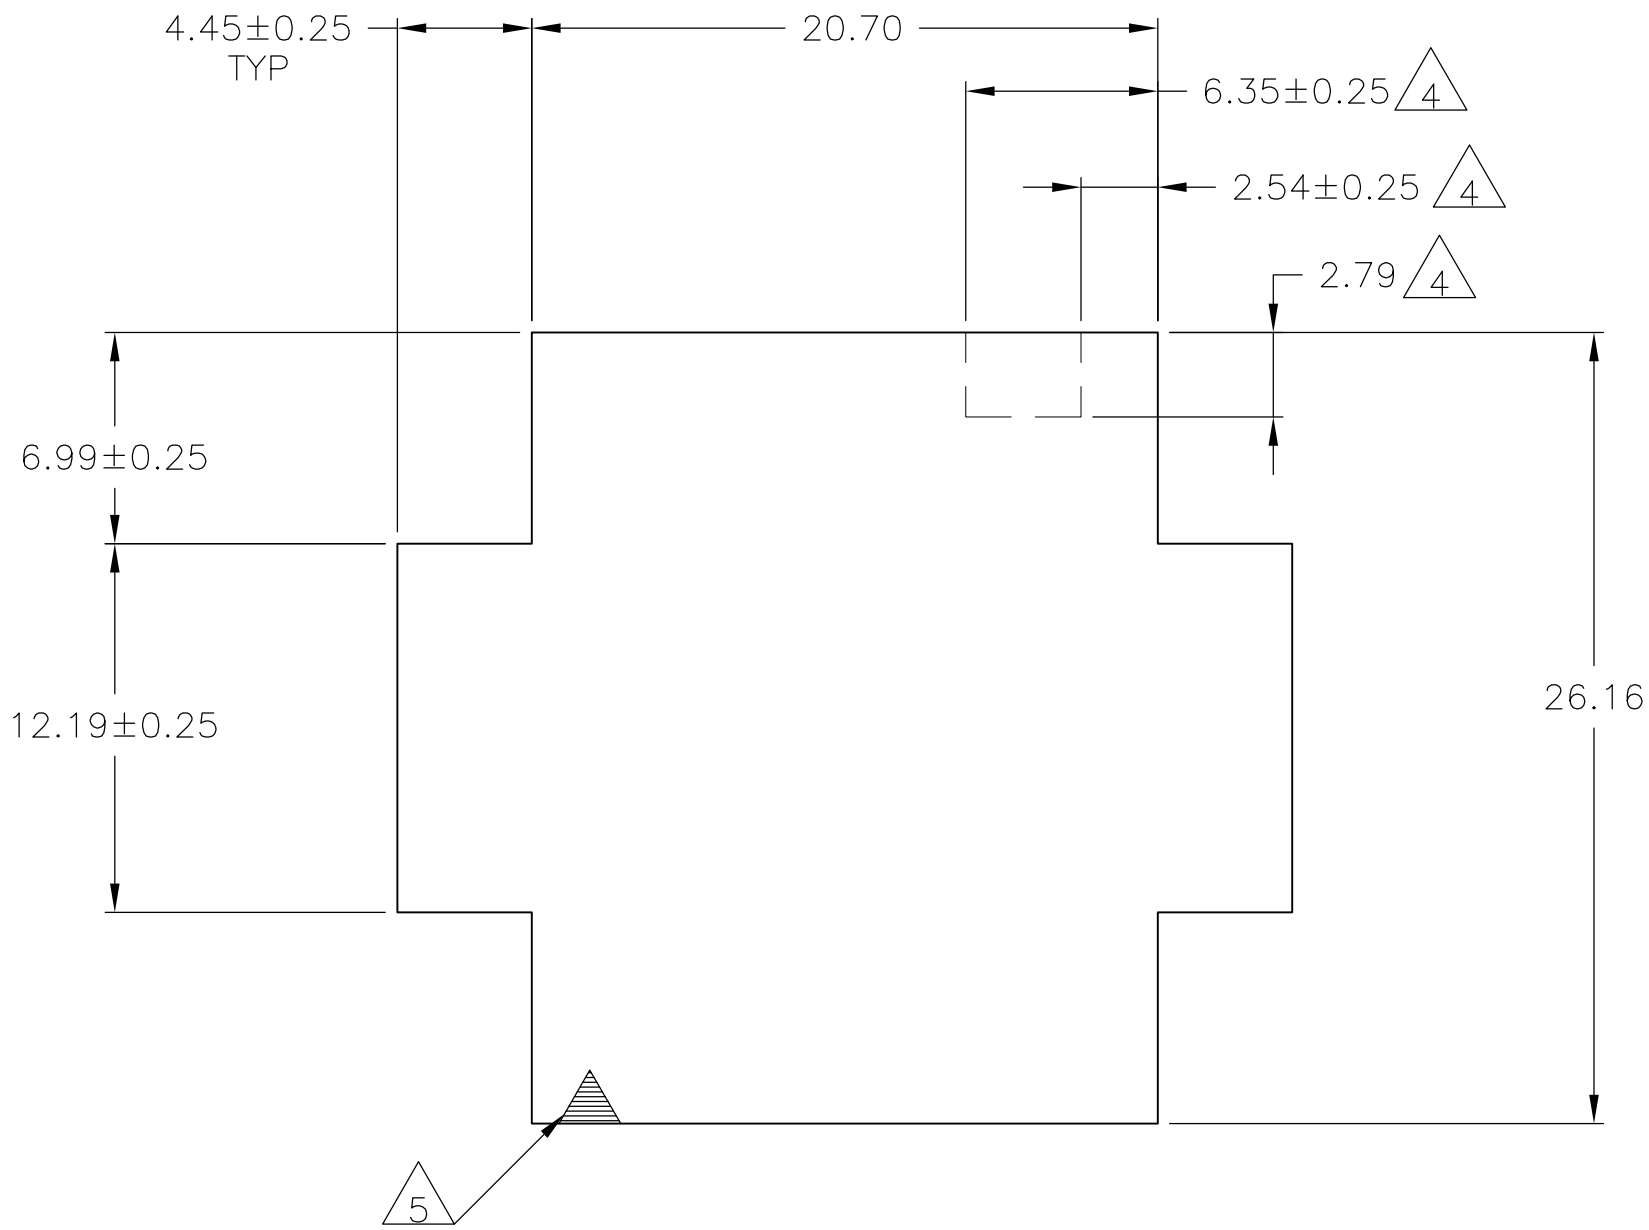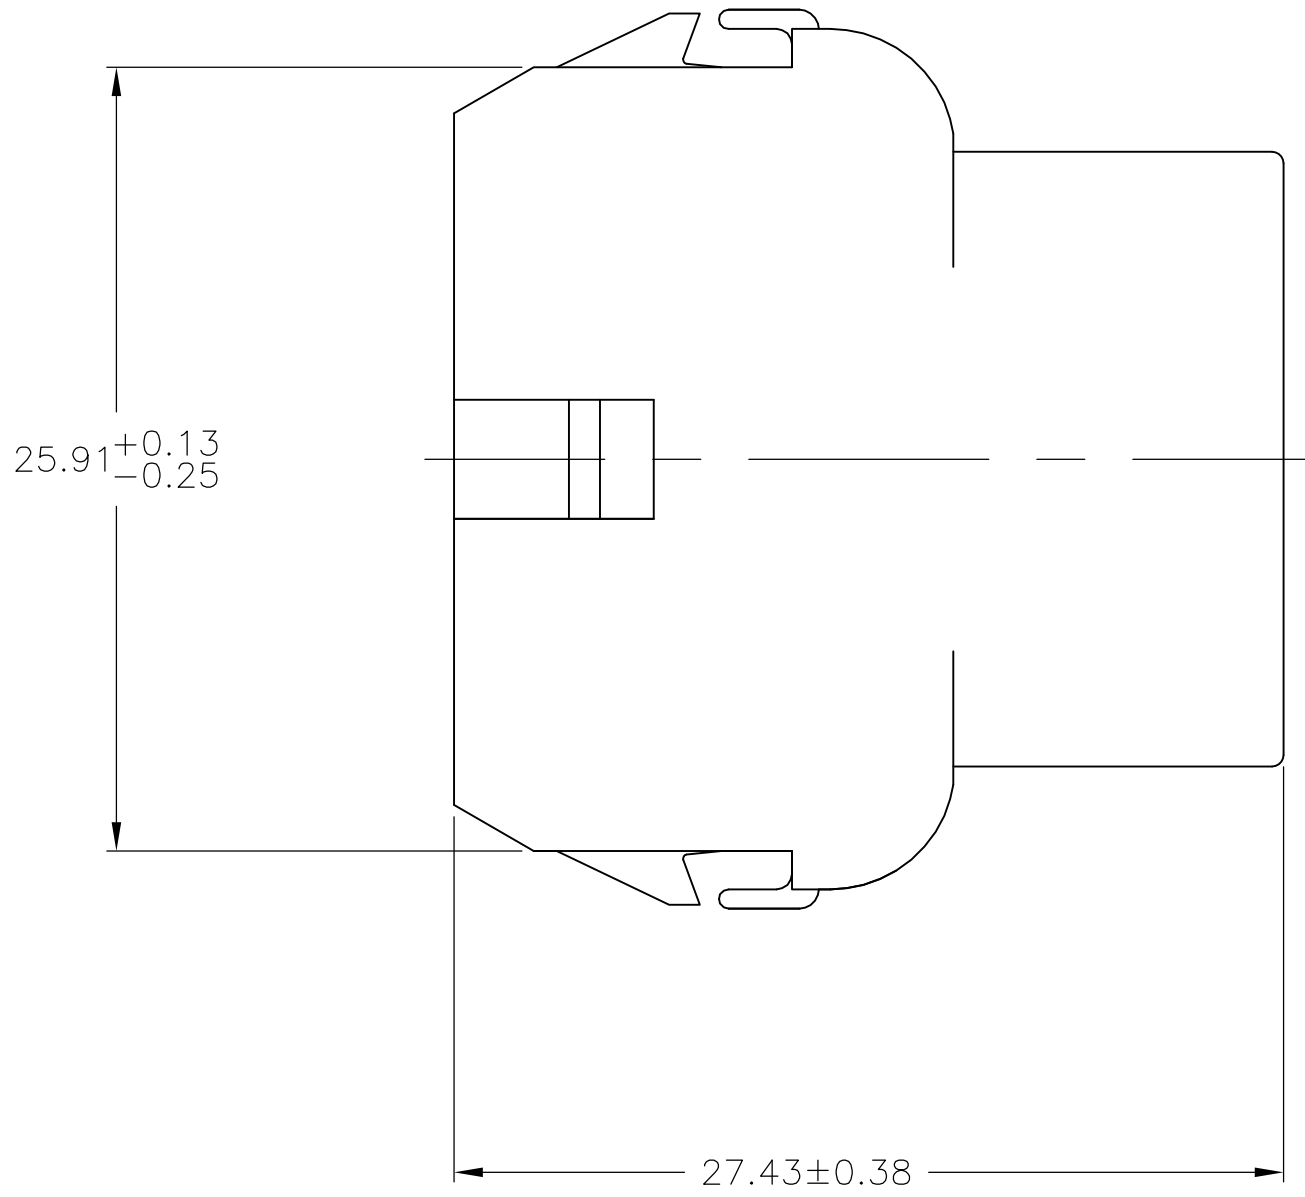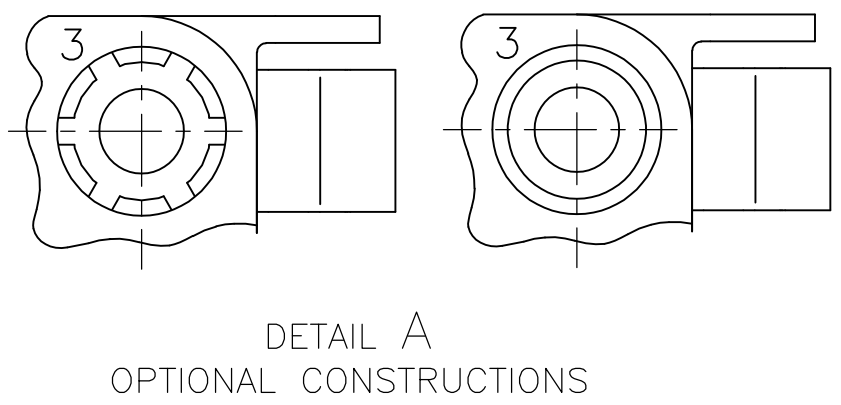

RECOMMENDED PANEL CUT OUT

B

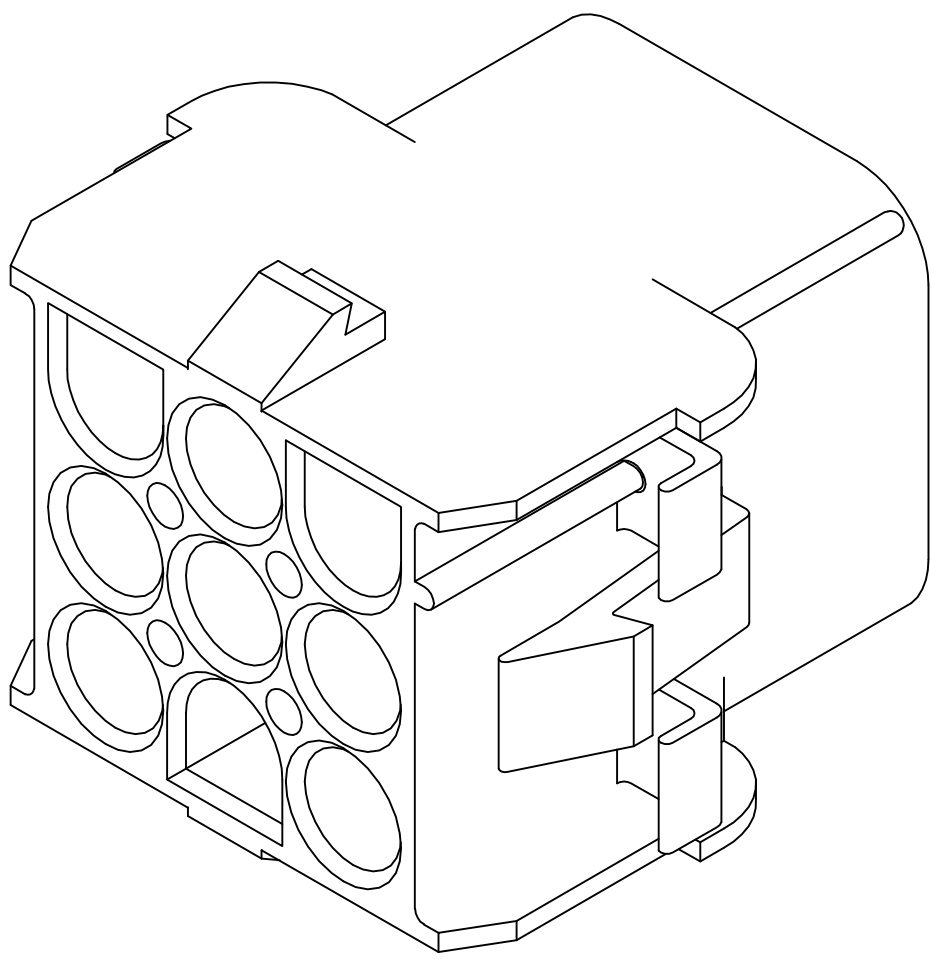

3-DIMENSIONAL MODEL
NTS

6.35	.250	—	—
4.45	.175	27.43	1.080
2.79	.110	26.43	1.041
2.54	.100	25.91	1.020
2.29	.090	20.70	.815
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.13	.320
0.13	.005	6.99	.275
MM	IN	MM	IN


CONVERSION TABLE

9	OBSOLETE	BLACK	1-480707-9
		GRAY	1-480707-8
9	OBSOLETE	BLUE	1-480707-6
		GREEN	1-480707-5
9	OBSOLETE	YELLOW	1-480707-4
		ORANGE	1-480707-3
9	OBSOLETE	RED	1-480707-2
		BROWN	1-480707-1
9	OBSOLETE	NATURAL	1-480707-0
		COLOR	PART NO





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	29JUL04	TE Connectivity	
DIMENSIONS: mm		CHK S. RIDGILL	29JUL04		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL	29JUL04	NAME	
0.010		PRODUCT SPEC	—	CAP, 9 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)	
0.025		APPLICATION SPEC	—	SIZE	
0.050		WEIGHT	—	CAGE CODE	
0.100		—	—	DRAWING NO	
0.150		—	—	RESTRICTED TO	
0.200		—	—	A100779	
0.250		—	—	C=480707	
0.300		—	—	CUSTOMER DRAWING	
0.350		—	—	SCALE	
0.400		—	—	4:1	
0.450		—	—	SHEET	
0.500		—	—	1 OF 2	
0.550		—	—	REV	
0.600		—	—	AL1	

LOC	DIST	REVISIONS				
		REV	DATE	BY	APPD	DESCRIPTION
CM	00	-	-	-	-	SEE SHEET 1

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE);CLARIFICATION MARKS UNDER THE 6 & 9.
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

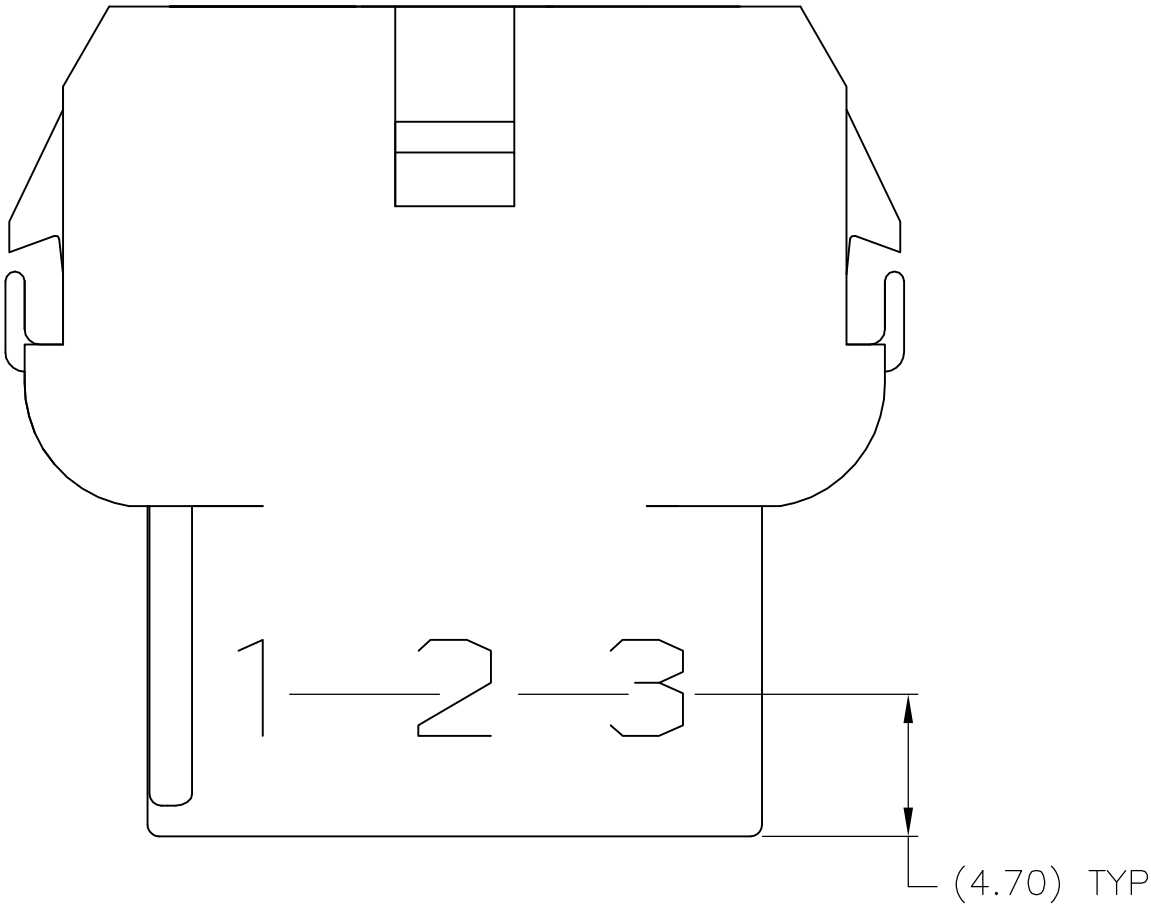

(4.70) TYP

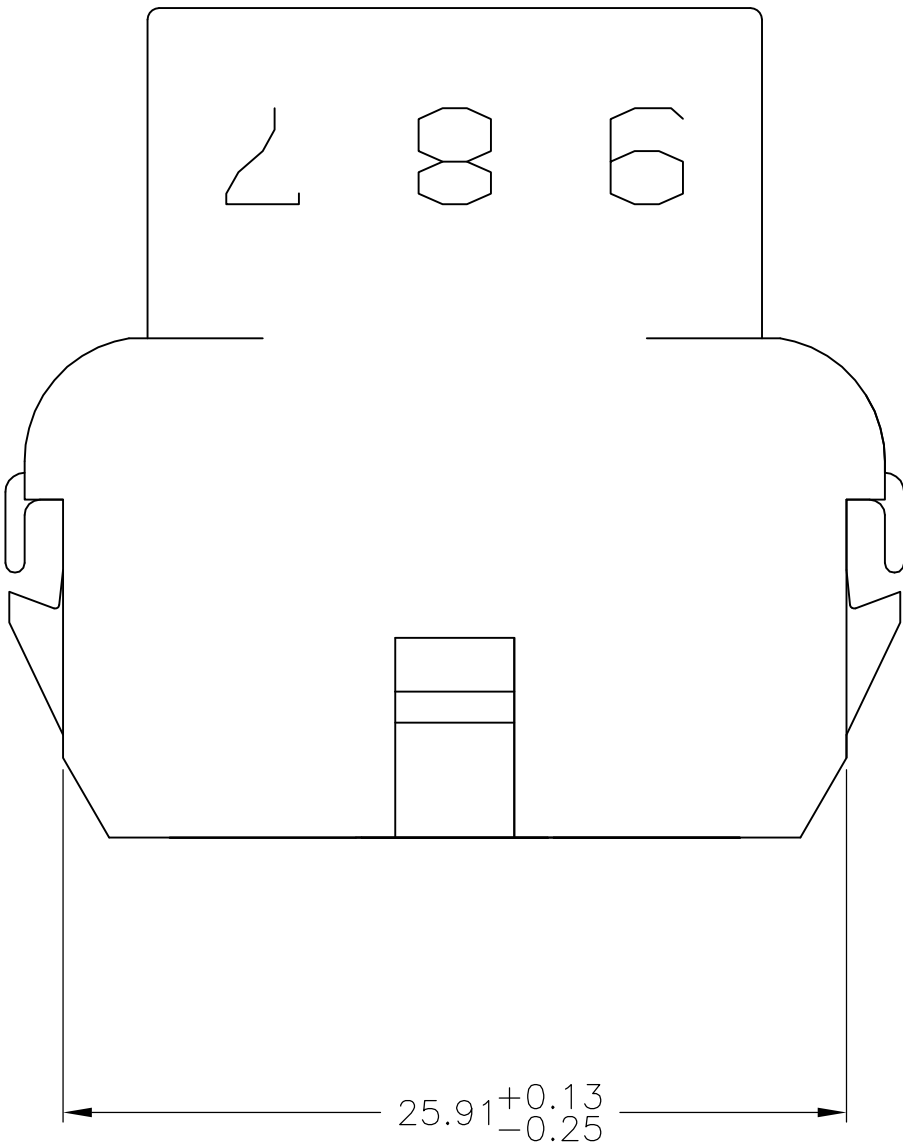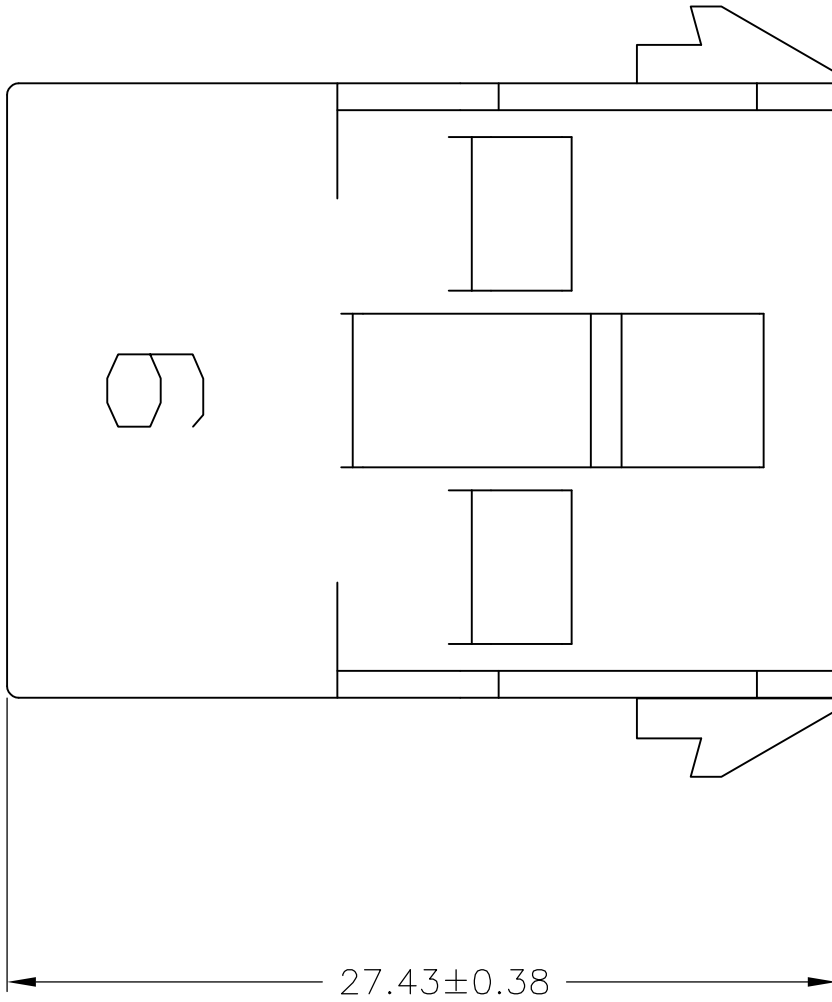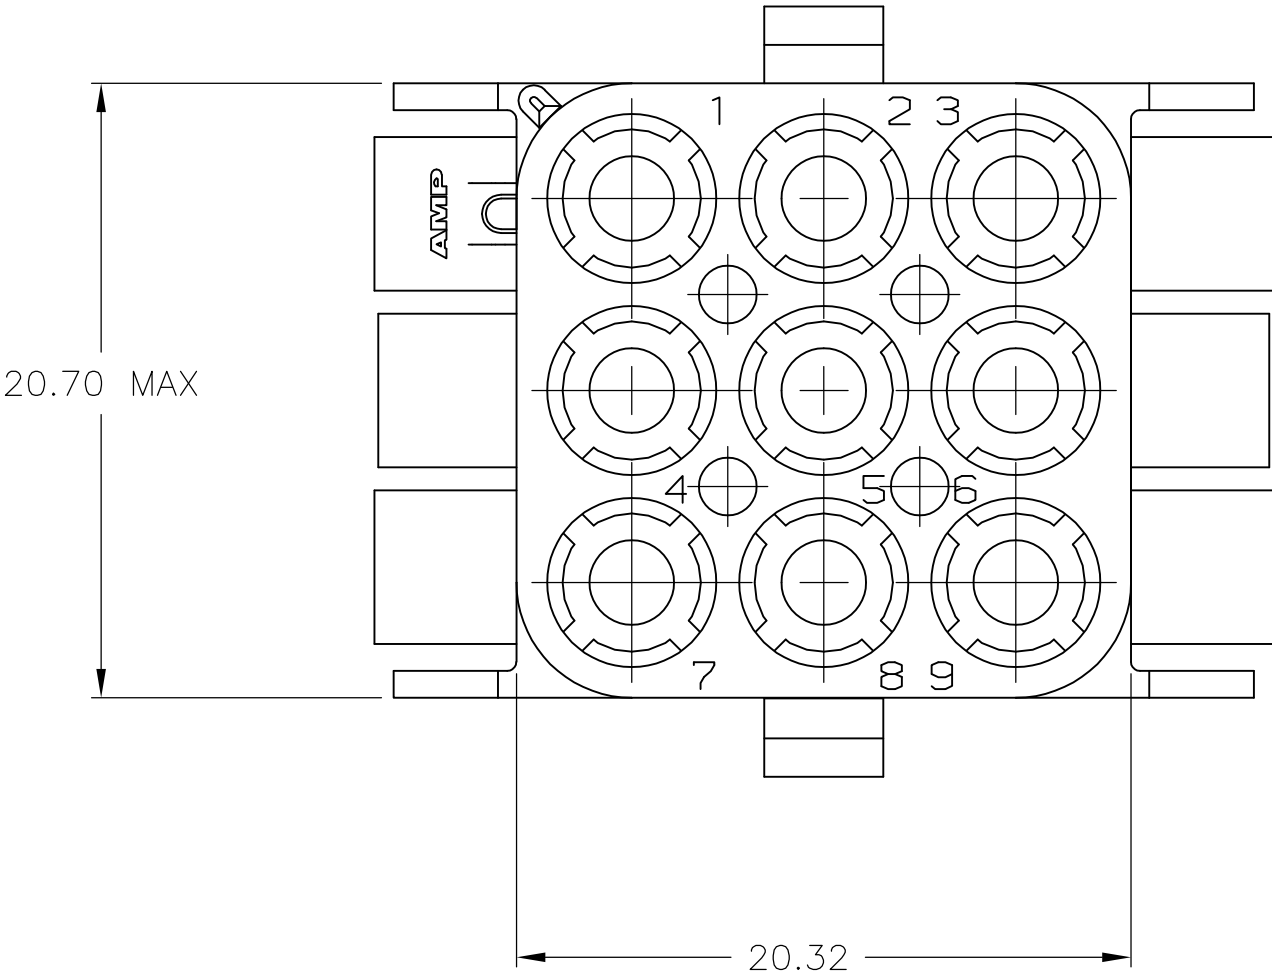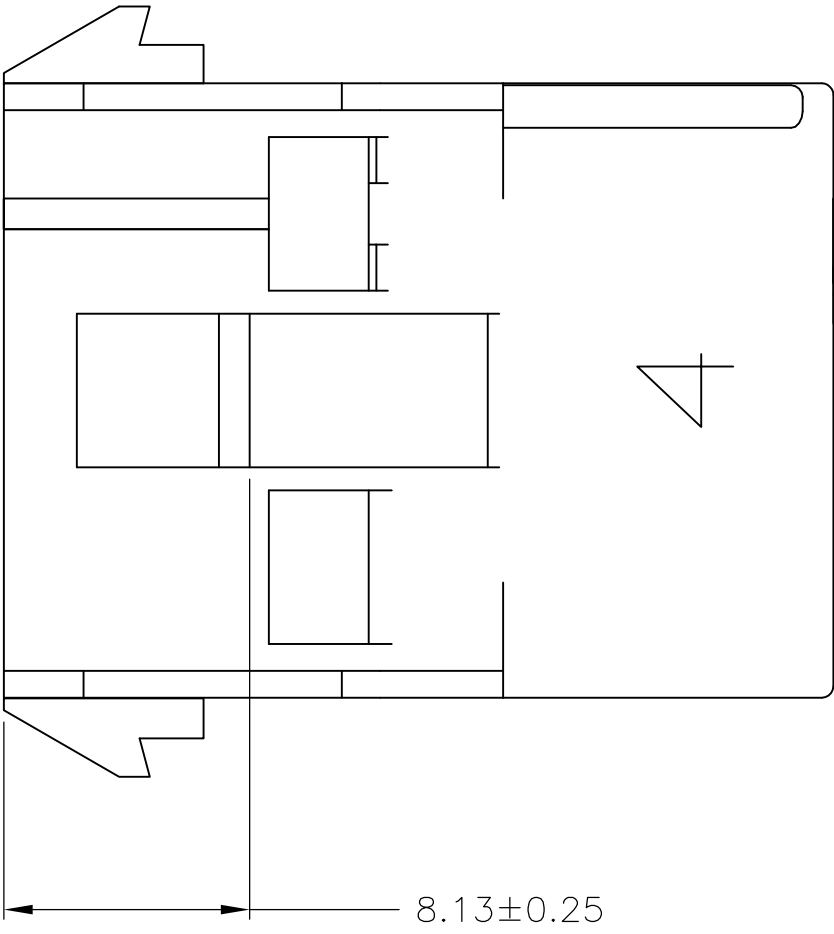

5.08	.200	-	-
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.70	.815
0.25	.010	20.32	.800
0.13	.005	8.13	.320
MM	IN	MM	IN

CONVERSION TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	29JUL04	 TE Connectivity			
		CHK S. RIDGILL	29JUL04				
DIMENSIONS: mm		APPR S. RIDGILL	29JUL04	NAME	CAP, 9 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± 0°30'		APPLICATION SPEC			
FINISH		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL NYLON, UL94V-2		-		A1	00779	C=480707	-
CUSTOMER DRAWING				SCALE		SHEET	REV
				4:1		2 OF 2	AL