


1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. CRIMP HEIGHT CALCULATED BY AMP/TYCO LTD.
5. GUIDE TERMINALS FROM INSULATION BARRELS.

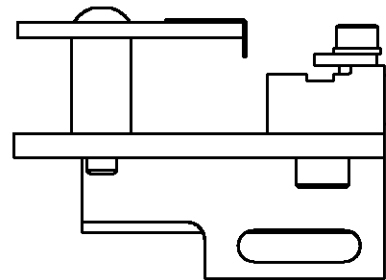

		B	0150-0782-03	RK	JUL03
P	F	A	SEE ECN 015A-0470-01	MC	JUN01
LTR			REVISION RECORD	APP	DATE

			DIMENSIONS: mm [INCHES]	MATL	-	HT TR	-	FIN	-	
			DO NOT SCALE PRINT.							
			TOLERANCES UNLESS OTHERWISE SPECIFIED:	DR	03MAY01	APP	03MAY01			
			1 PLC DEC ± 0.5 [0.2 IN]	L LOUHOUSE			F BACKHURST			
			2 PLC DEC $\pm$	CHK	-	REL	07-06-01	AMP	AMP Incorporated Harrisburg, PA 17105-3608	
			3 PLC DEC $\pm$				M CLIFFORD			
RK	JUL03		ANQLES $\pm$	NAME	SIDE FEED HD-I APPLICATOR				MACHINE	REF
MC	JUN01		SURF TEXTURE: $\checkmark$	SCALE	-	D	DWG NO	1426198	HD-I	APPL
APP	DATE		REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX						SHEET	REV
									1 OF 1	B
			CAGE CODE 00779	CUSTOMER AND ASSEMBLY DRAWING					RESTRICTED TO	
									-	