

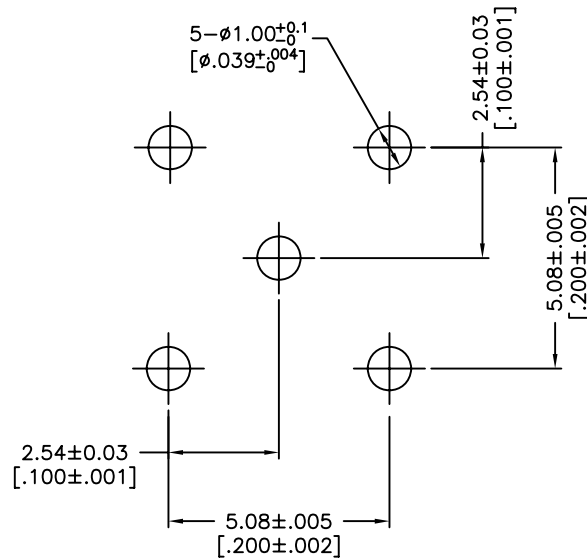
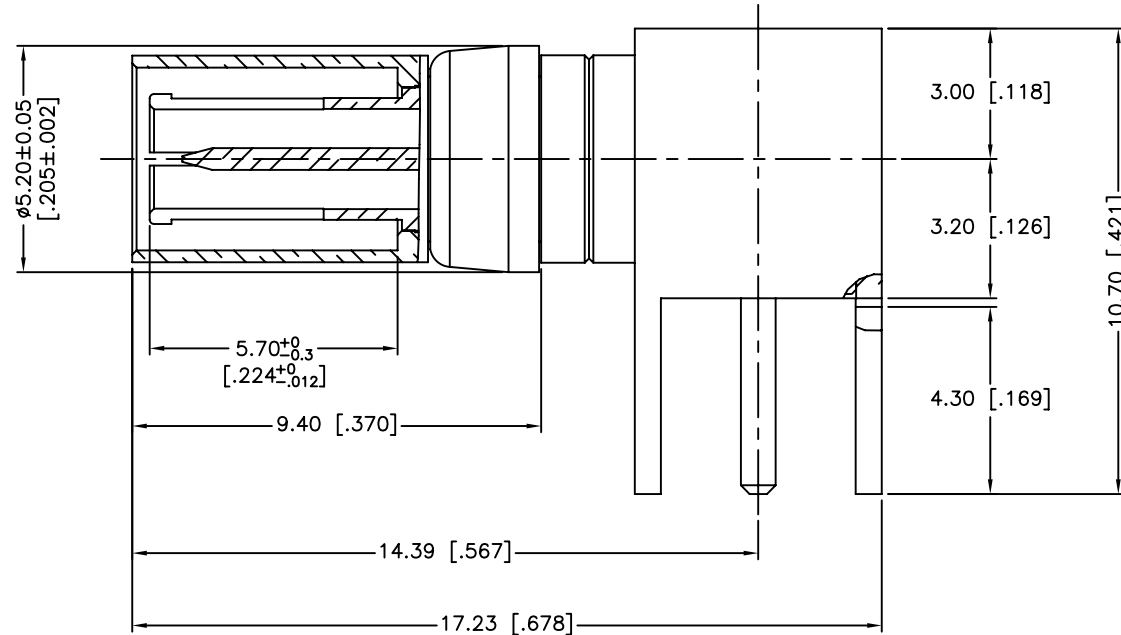


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/13/11	XXXXXX	INITIAL RELEASE

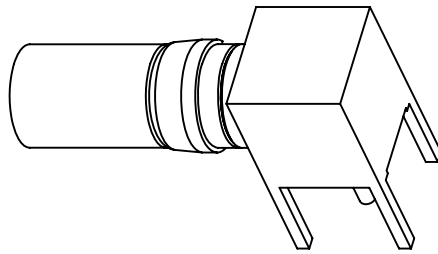

RECOMMENDED
MOUNTING HOLE

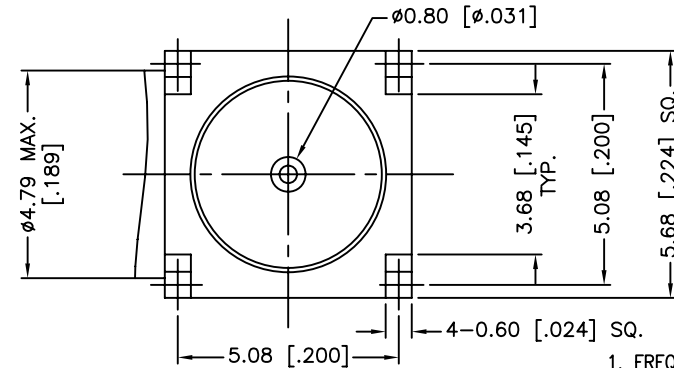

1. FREQUENCY RANGE: DC 0–4 GHz
2. VSWR(RETURN LOSS): 1.10, MAX.

6	HOUSING	BRASS	GOLD	1
5	INSULATOR	PTFE	NATURAL	1
4	RETAINER RING	BER. COPPER	BRIGHT TIN	1
3	CONTACT PIN	BRASS	GOLD	1
2	OUT CONTACT	BER. COPPER	GOLD	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN M.ZHANG	05/13/11
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	CHECKED	
DO NOT SCALE DRAWING	ISSUED	
	SHEET 1 OF 1	
	CAD FILE C:/CONNEX/282116–75.DWG	

Amphenol Connex			
PART DESCRIPTION			
1.0/2.3 R/A PCB PLUG (75 ohm)			
PART NO.			
282116–75			
DWG. NO.	282116–75.DWG	REV.	NC
SIZE	A	SCALE	NA