
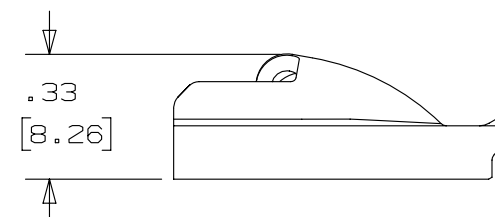




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TO BE USED WITH PANDUIT METAL BANDING MBCSH-QR316
2. INSTALLATION TOOLS: RT2HT, PBTMT, RT2HTN
3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS
4. MINIMUM LOOP TENSILE STRENGTH: 450 LBS (2002N)
5. TOLERANCES:
 - .X = $\pm .030$ [.762]
 - .XX = $\pm .020$ [.508]
 - .XXX = $\pm .010$ [.254]
 - ANGLES = $\pm 2^\circ$
6. MATERIAL: 316 STAINLESS STEEL

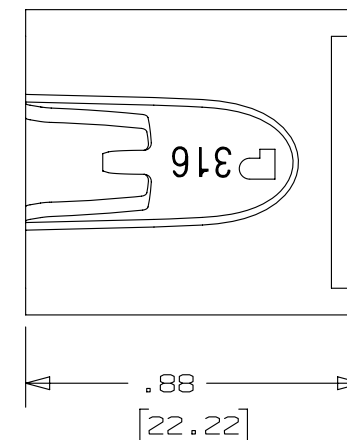

02A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01049
01A	7/11	JAMB	EJD	---	REMOVED INSTALLATION TOOL RT1HT. ADDED INSTALLATION TOOLS RT2HT,PBTMT & RT2HTN	-----
00	8/05	JAMB	EJD	---	DRAWING RELEASED	SS00030
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE				METAL LOCKING TIE HEAD – SUPER HEAVY DUTY – FOR FULLY COATED BANDING PART NUMBER MTHCSH-C316			
				CUSTOMER DRAWING			
ITEM REVISION NAME							
N41198BS/02							
DATASET FILE NAME							
N41198BS_DC/02A				MATERIAL:			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]							
.x ± .1 [2.54] .xxx ± .005 [.127]				SEE NOTES			
.xx ± .01 [.25] ANGLES ± 5 °							
				DRAWING NUMBER:			
THIRD ANGLE PROJECTION				N41198BS_DC			
DRAWN BY		DATE		CHK		SCALE	
JAMB		8/23/05		EJD		2:1	
SHT 1 OF 1						SIZE	
						A	