Mini DB9M to DB9M Null Modem Adapter

Model 31D1-28100

B+B SmartWorx
Powered by ADVANTECH
www.advantech-bb.com

- \+ DB9M to DB9M null modem adapter
- \+ Lifetime warranty

OVERVIEW

A null modem cable is frequently called a crossover cable. It allows two serial Data Terminal Equipment (DTE) devices to communicate with each other without using a modem or a Data Communications Equipment (DCE) device in between.

PIN OUTS

DB9 Male		DB9 Male
2	———	3
3	———	2
4	———	1
	———	6
5	———	5
1	———	4
6	———	
7	———	8
8	———	7
G	———	G

SPECIFICATIONS

MECHANICAL	
Insulator	PBT glass fiber reinforced UL 94 V0
Contact	Brass
Contact Plating	Gold-plated over nickel
Enclosure	Tin-plated
ELECTRICAL	
Current Rating	3 AMP
Dielectric Strength	500 VAC for one minute
Insulator Resistance	500M Ω minimum at 500 VDC
ENVIRONMENTAL	
Temperature Rating	-25 to +105 °C

MECHANICAL

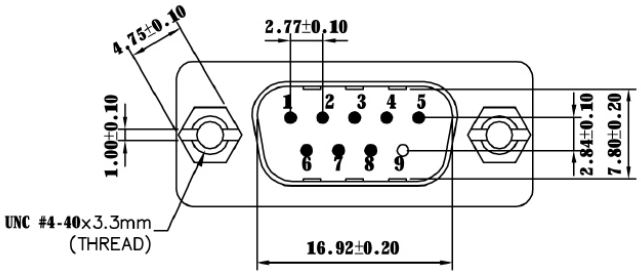

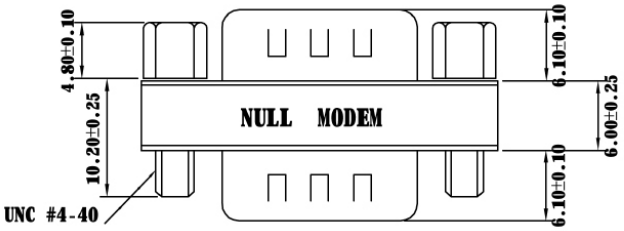

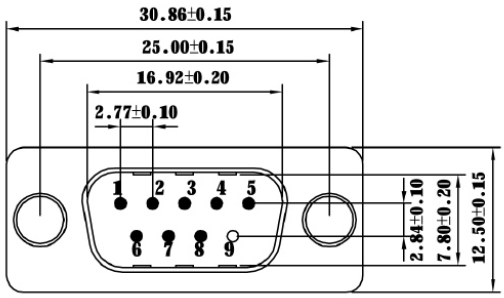

All product specifications are subject to change without notice.
31D1-28100-NullModemAdapter_0417ds

orders@advantech-bb.com
support@advantech-bb.com
Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445