

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECO-12-006972	23AUG2012	KH	JE
			B1	REVISED PER ECO-17-013931	18SEP2017	R.L	H.L

- 2

PHOSPHOR BRONZE
- 3

GLASS FILLED POLYESTER
- 4

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 5

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- 6






REFERENCE APPLICATION SPEC 114-13020 FOR
RECOMMENDED PLATED THRU HOLE DIAMETER AND
PLATING THICKNESS.
- 7

APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD.
- 8

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 9


CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 10

HOLE DIAMETER SHOULD BE 3.10 WHEN USING FEED THROUGH GUIDE PIN P/N 120759.
CLEARANCE FOR A M3x0.5 THREAD.

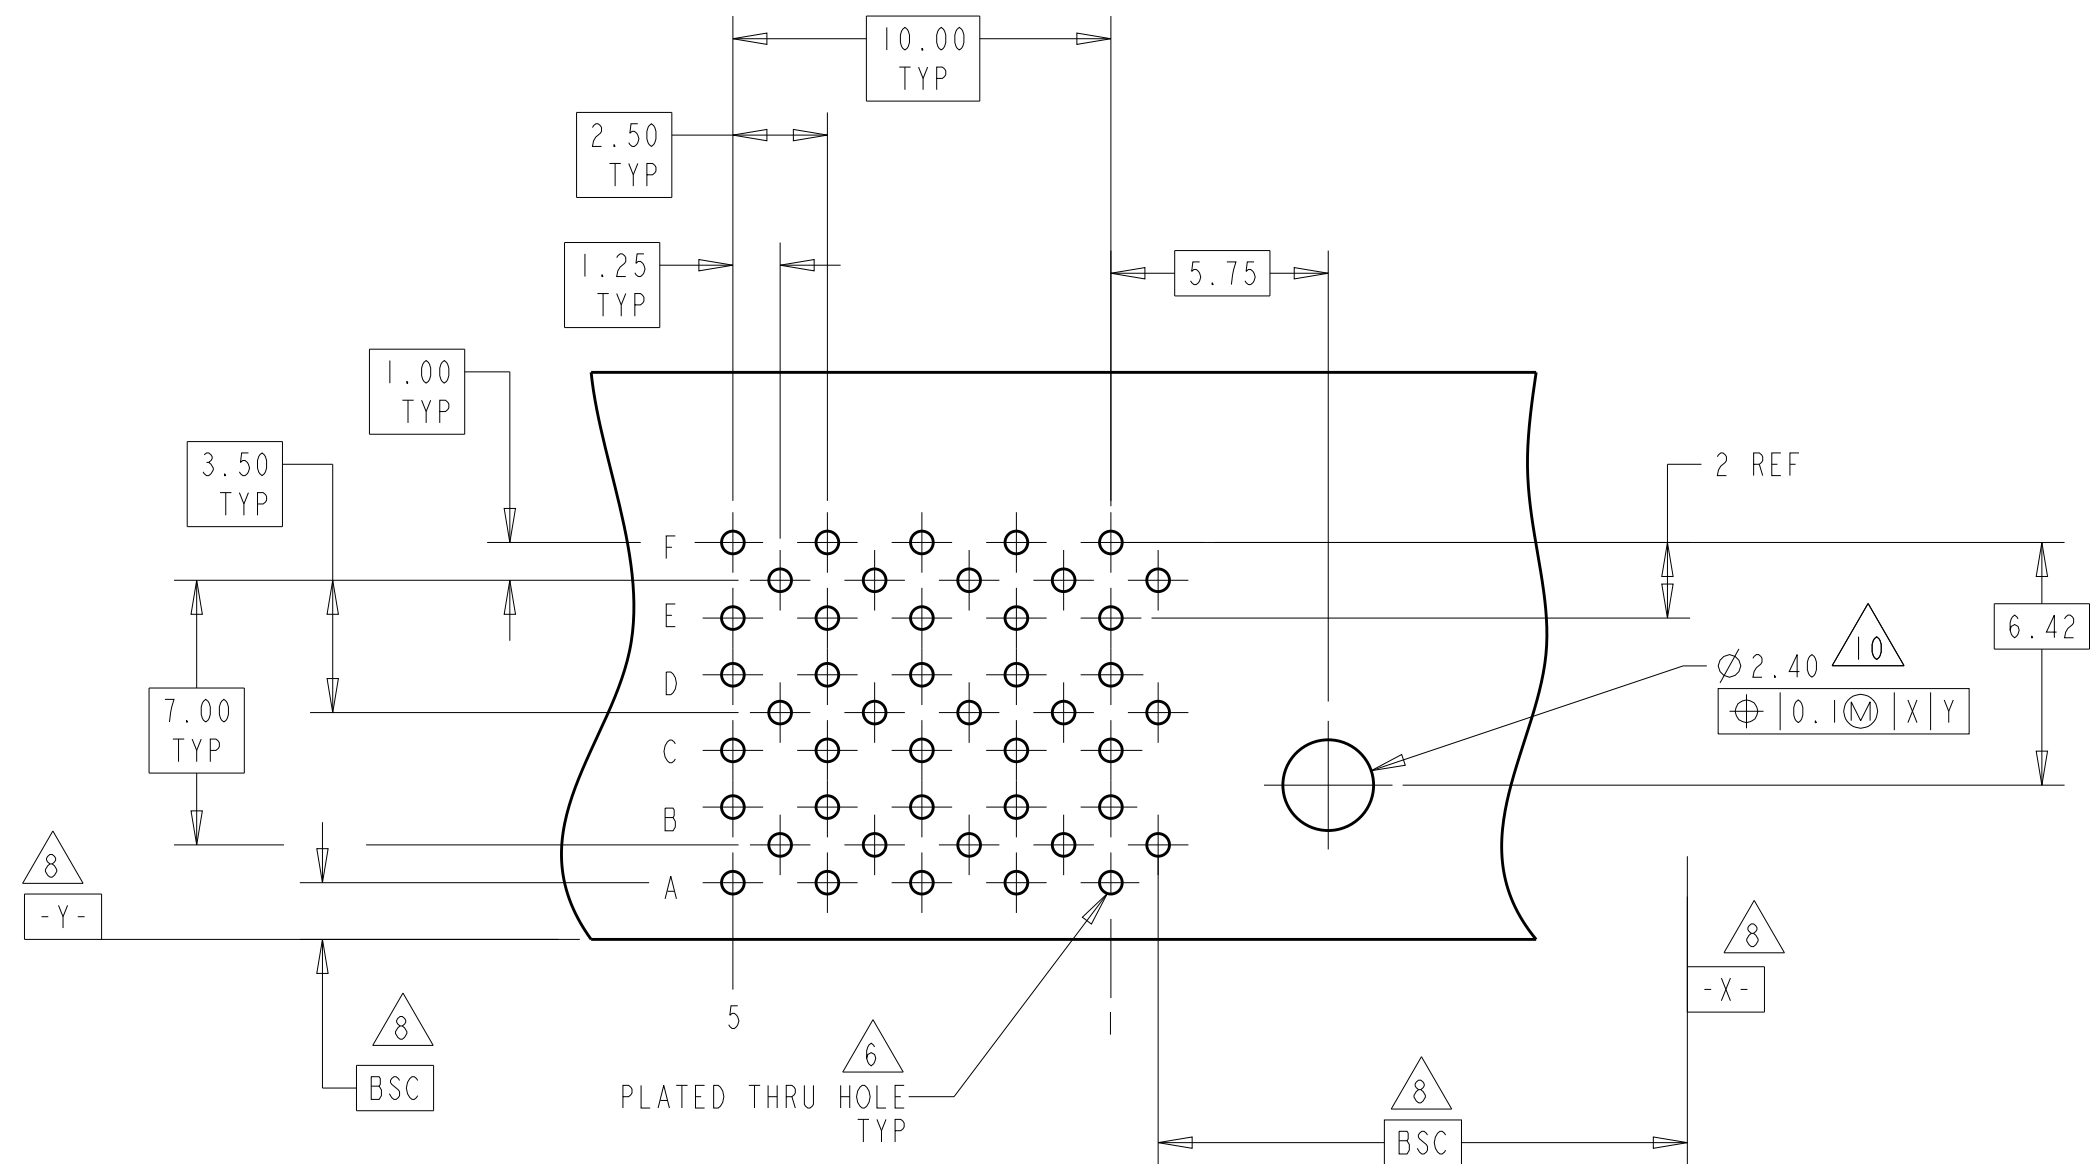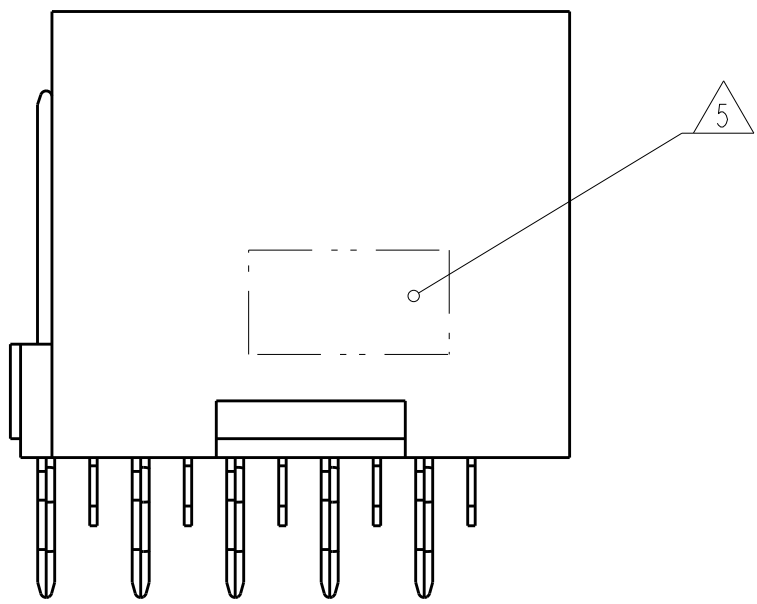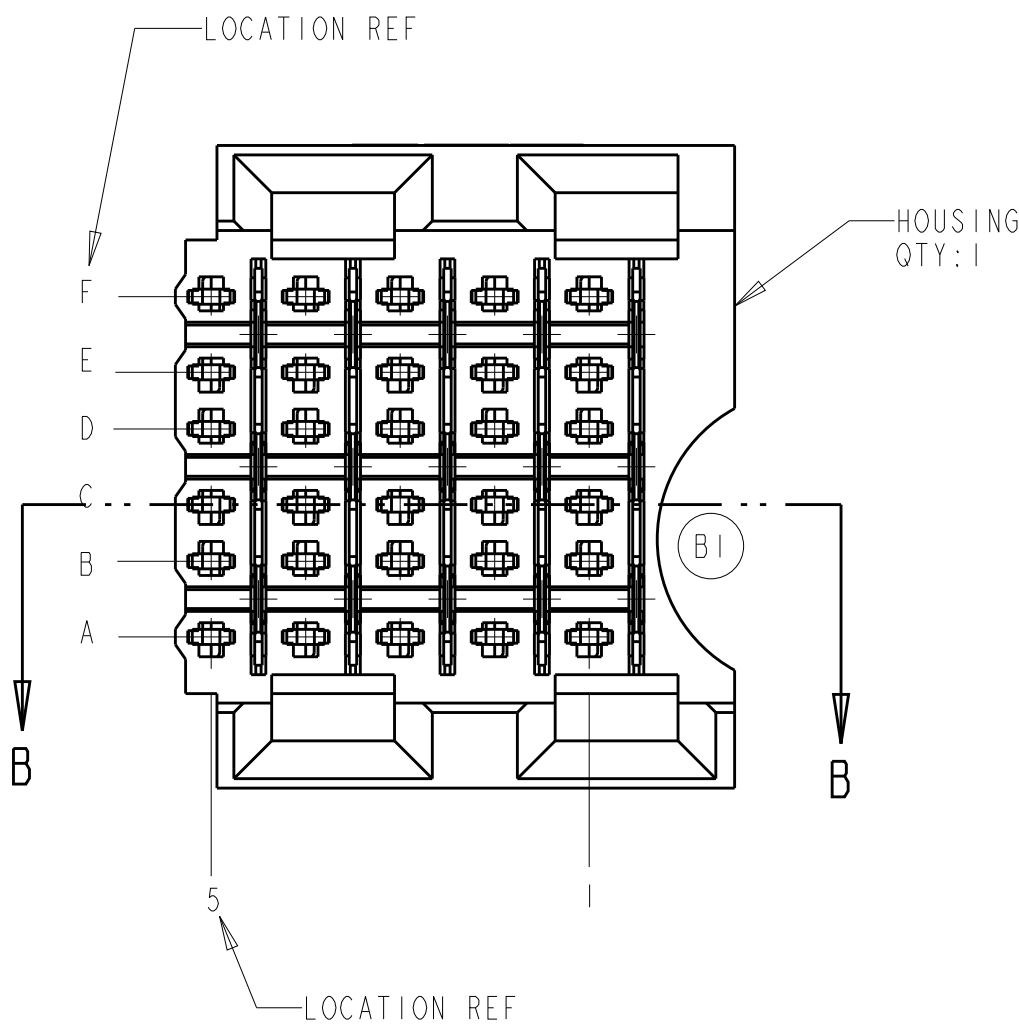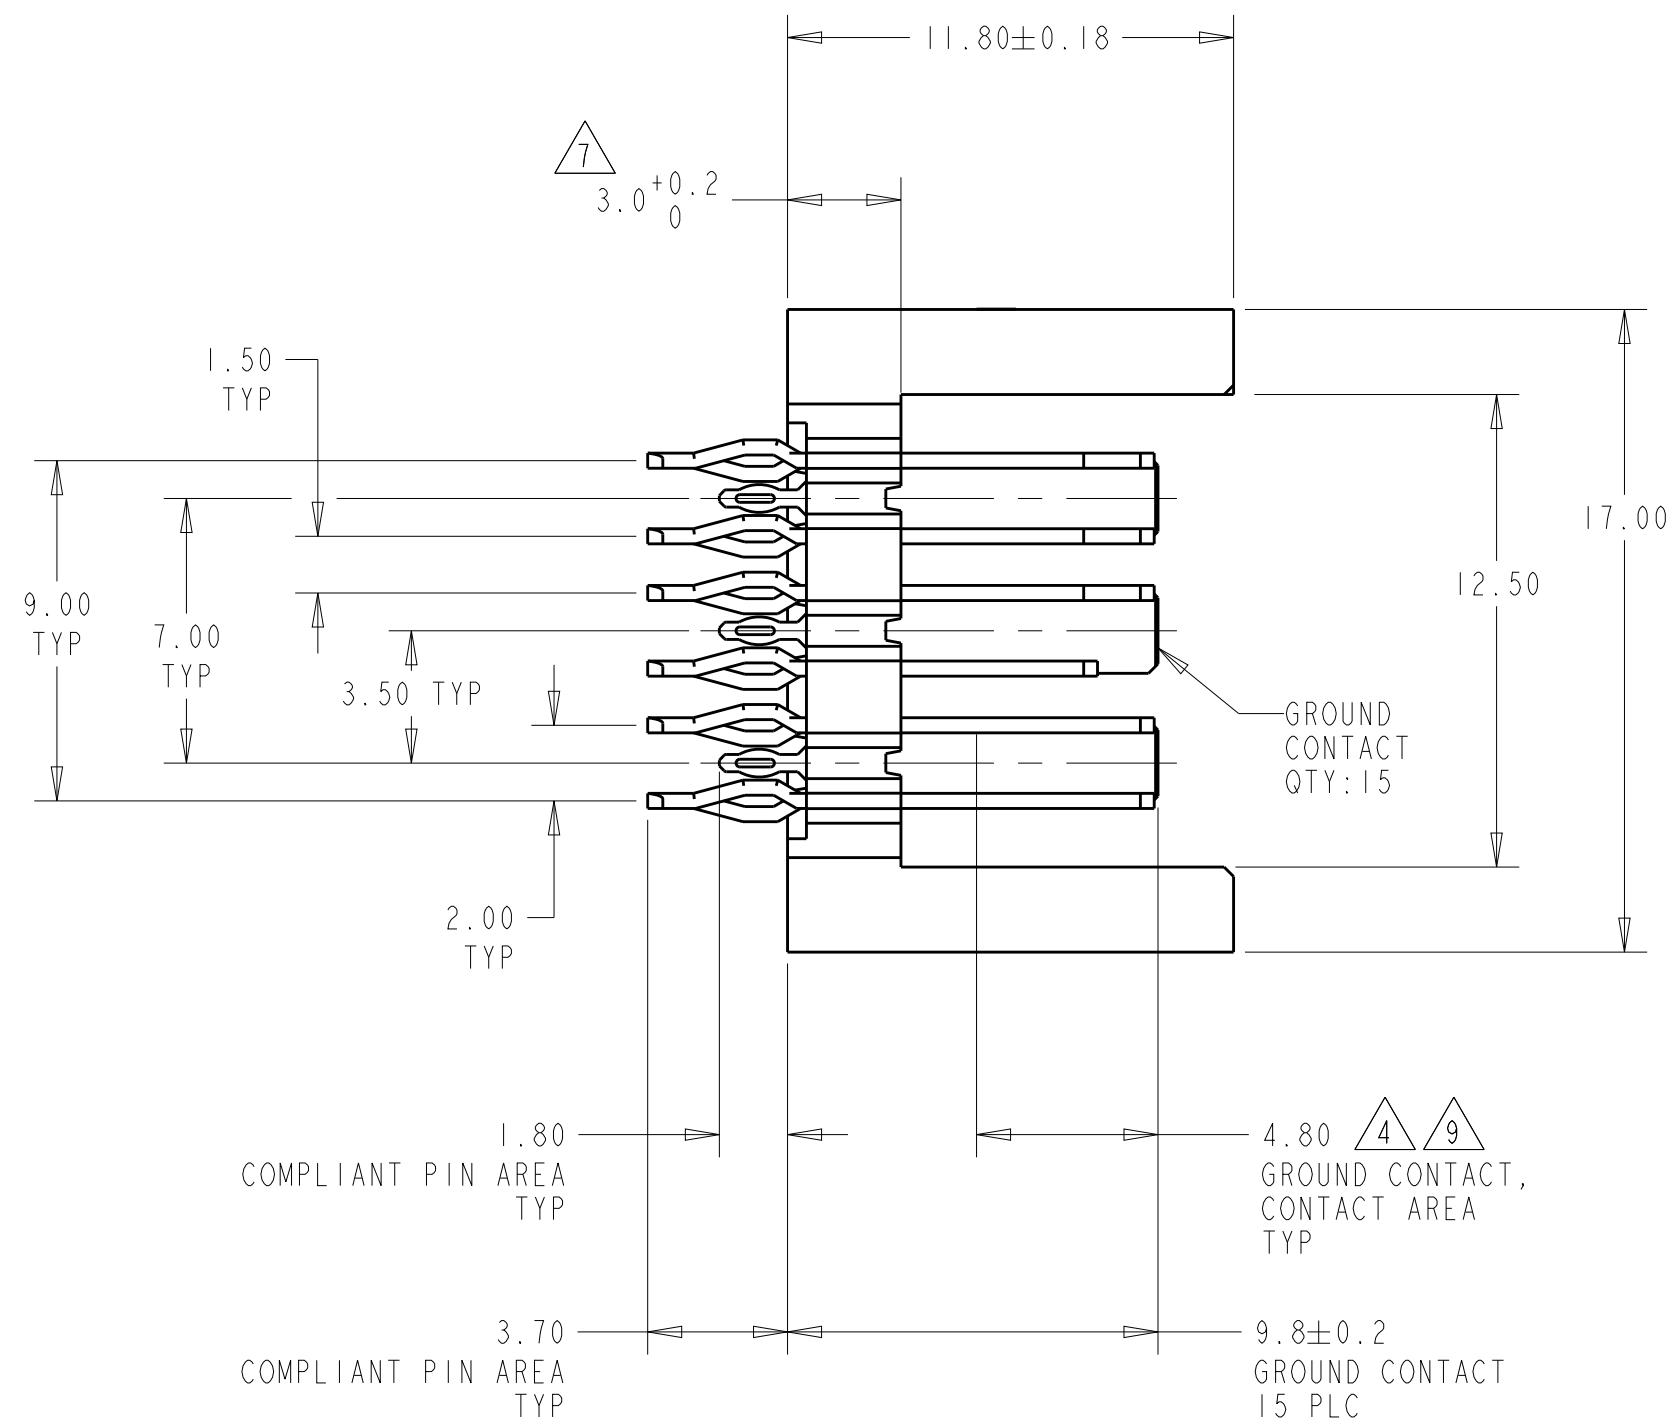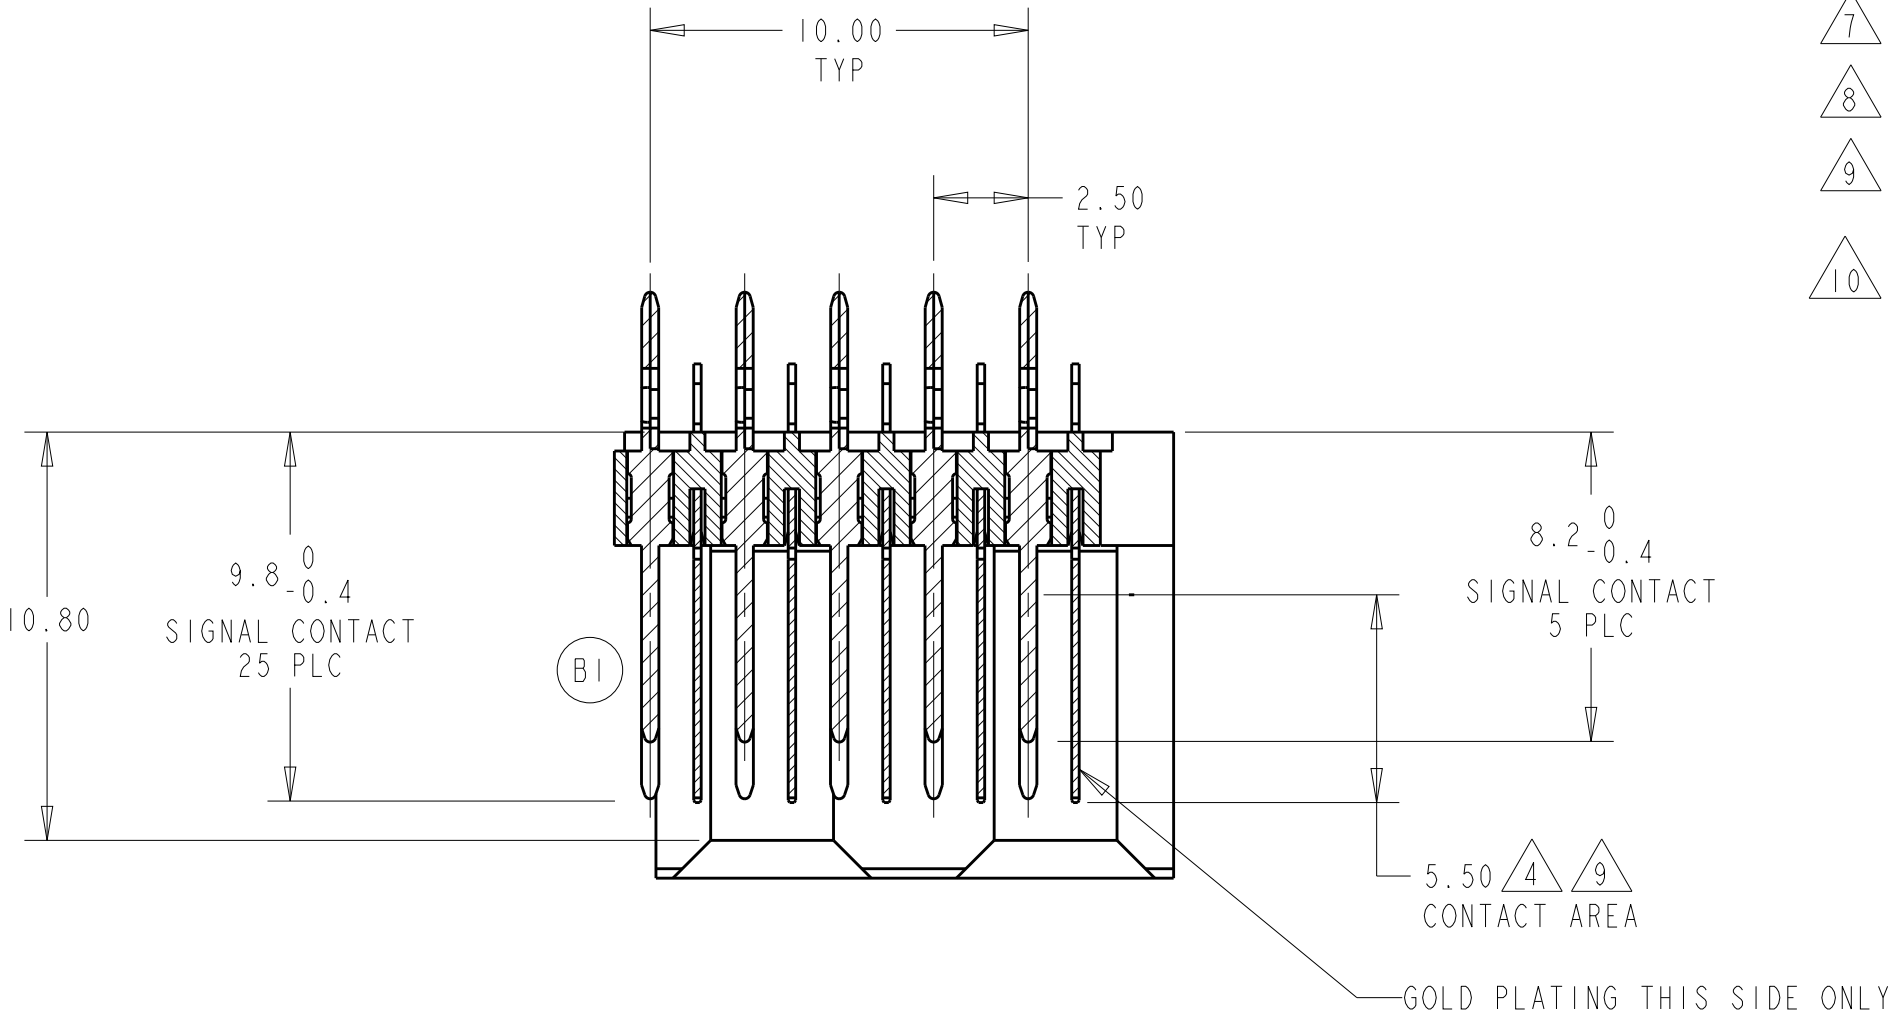

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

ROWS A,B,D,E,F	ROW C	5120840-1
SIGNAL CONTACT TYPE B QTY: 25 9.7 LENGTH REF	SIGNAL CONTACT TYPE A QTY: 5 8.2 LENGTH REF	AMP PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 09DEC04	 TE Connectivity			
DIMENSIONS:		CHK R. PATTERSON 09DEC04				
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. PATTERSON 09DEC04	NAME	HEADER ASSEMBLY, 30 POSITION, SEQUENCED, LEFT HAND, 6 ROW, Z-PACK HS3	
			PRODUCT SPEC			
MATERIAL		HOUSING: 3 CONTACTS: 2 SIGNAL CONTACT: 4	APPLICATION SPEC	SIZE	CAGE CODE	
			FINISH			WEIGHT
CUSTOMER DRAWING			DRAWING NO			
			A1 00779 ©=5120840			
			SCALE 5:1			
			SHEET 1 OF 1			
			REV B			