



SPECIFICATIONS

- 1. CASE:
22 GA. (.030) CRS, TIN PLATED
- 2. RATED CURRENT:
20A
- 3. RATED VOLTAGE:
60VDC
- 4. TEST VOLTAGE:
LINE TO GROUND: 150VDC

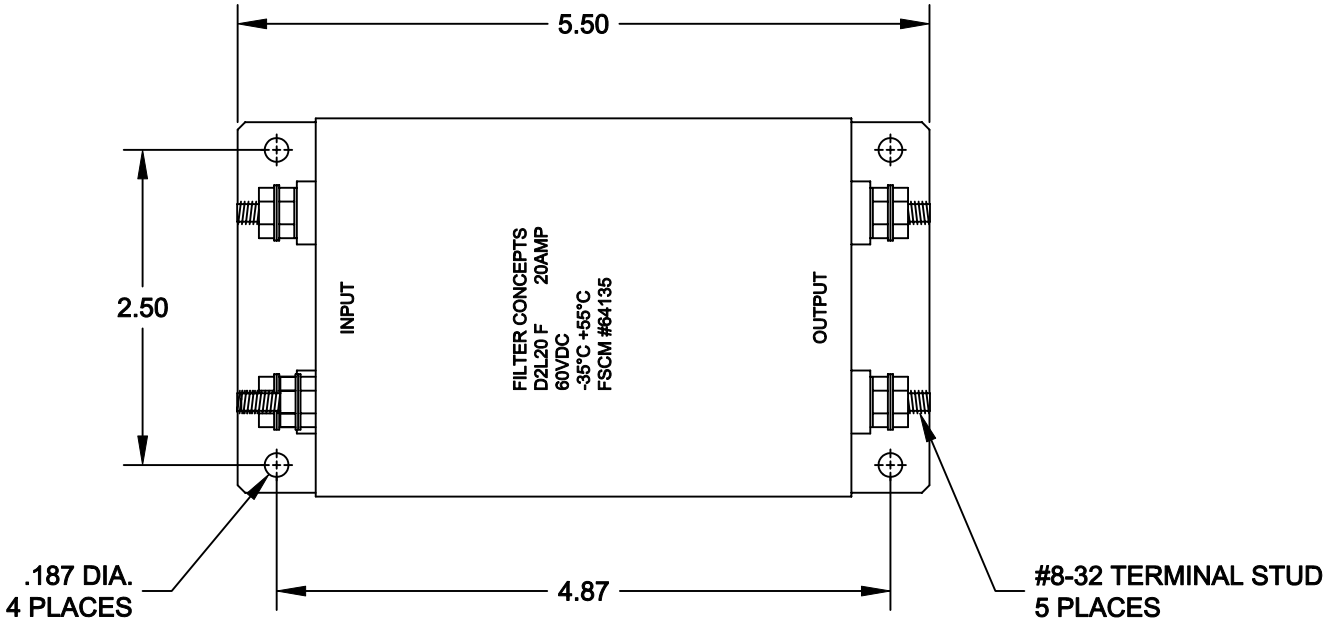


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08-08-02	LE
B	REVISED MARKING	07-09-03	LE

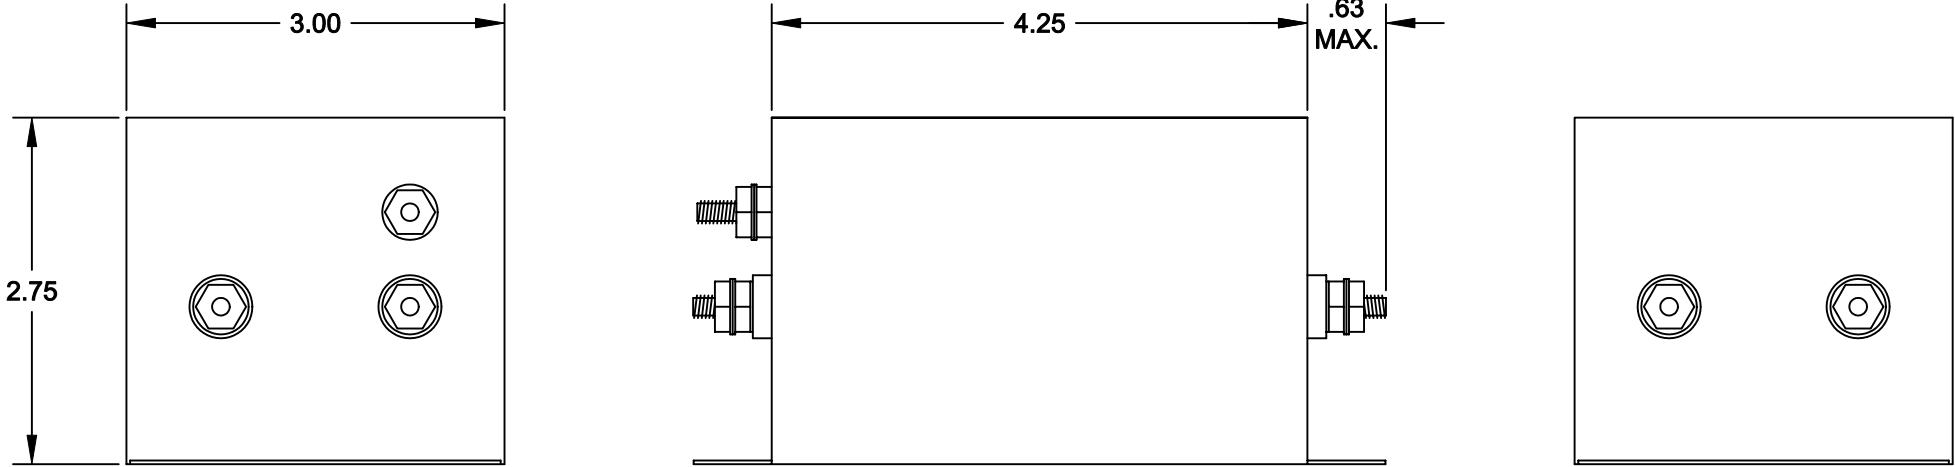

INSERTION LOSS (50Ω TYPICAL)

	.02 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	50 MHz
L/L	35 db	55 db	65 db	65 db	65 db	60 db
L/G	30 db	50 db	60 db	60 db	60 db	50 db

SCHEMATIC

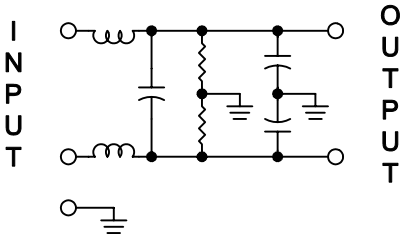

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
.XXX ±.010

CONTRACT NO.

APPROVALS DATE

DRAWN GIANH TRINH 07-16-02

CHECKED DANNIEL VUONG 08-08-02

FINISH

NEXT ASSY USED ON

APPLICATION

SIZE B

CODE IDENT NO.

DRAWING NO. 7431

SCALE 2/3 SHEET 1 OF 1

FILTER CONCEPTS INC.

APPLICATION DRAWING
D2L20 F FILTER