
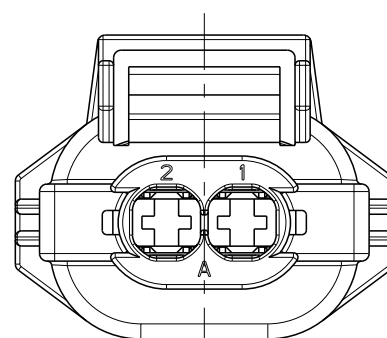
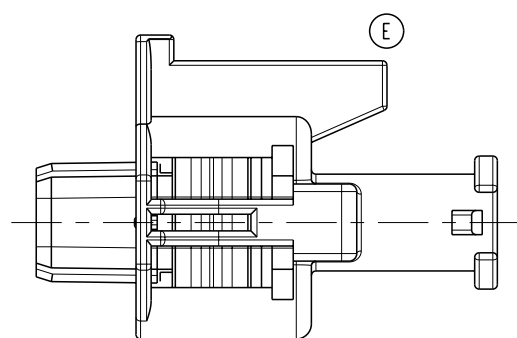
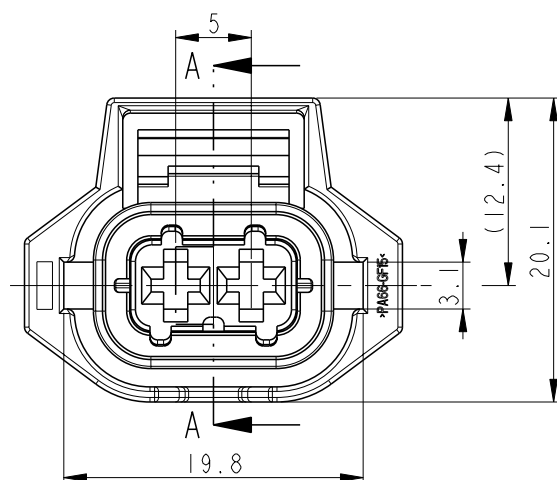

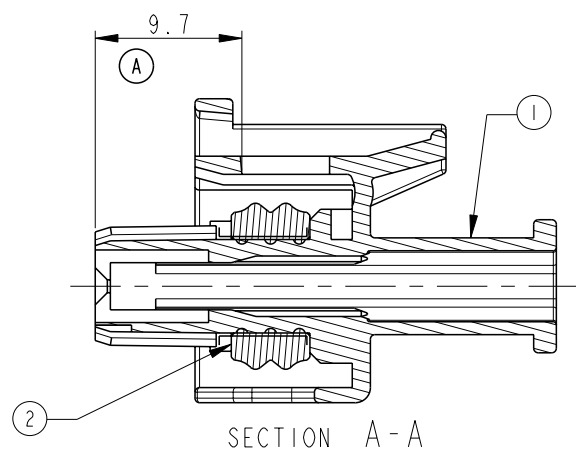


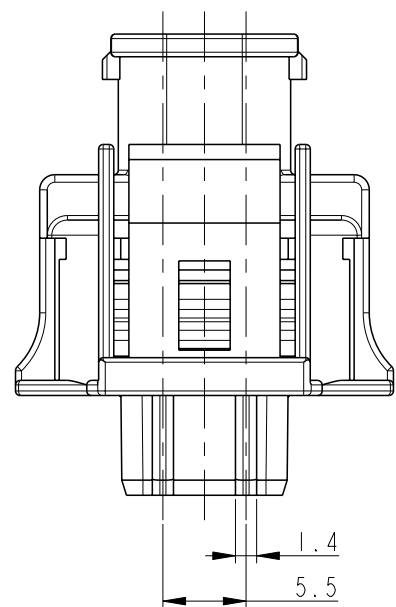

NOTE





1. CODING IS AS FOLLOWS: SEE TABLE 1
 2. 0.15 MAX. WARPAGE AND 0.2 MAX. FLASH ARE PERMISSIBLE
 3. SURFACE DEFECTS ARE NOT ACCEPTABLE AS FOLLOWS: SINK, WELD LINES, HIRCRACKS, STAINS & SCORES
 4. APPLIED RECEPTABLE CONTACT P/N:

DESCRIPTION	2.8mm SENSOR-FLAT RECEPTACLE	
PART NO.	967542	967543
WIRE SIZE (mm ²)	0.5 ~ 1.0	1.25 ~ 2.5

5. APPLIE WIRE SEAL P/N:

DESCRIPTION	SINGLE WIRE SEAL (5mm HOLE)	
PART NO.	828904	967543
INSULATION DIA. (Ø)	1.2 ~ 2.1mm	2.2 ~ 3.0mm

[TABLE 1] (SCALE 1:1)

CODE I : 0-936059-1 CODE I : 0-936059-3	CODE II : 1-936059-1 CODE II : 1-936059-3
 7	 4
CODE III : 2-936059-1	CODE IV : T.B.D.
 3.5 5.5	 3.5 5.5

	Q'TY						P/N	DESCRIPTION	MATERIAL	COLOR/FINISH	NO.
(F1)	I	I	I	I			936800-3	INNER SEAL	SILICONE	SIGNAL GRAY	2
(D)					I		936800-2	INNER SEAL	SILICONE	ULTRAMARINE BLUE	2
					I	I	936800-1	INNER SEAL	SILICONE	RED ORANGE	2
(G)	I						3-936102-1	PLUG HSG	PA66 GF15	BLACK	I
(G)		I					2-936102-1	PLUG HSG	PA66 GF15	BLACK	I
(F)			I				1-936102-3	PLUG HSG	PA66 GF15	DARK GRAY	I
				I			1-936102-1	PLUG HSG	PA66 GF15	BLACK	I
(G2)					I		936102-3	PLUG HSG	PA66 GF15	GRAY	I
					I	I	936102-1	PLUG HSG	PA66 GF15	BLACK	I

ASS'Y P/N	QTY	P/N	DESCRIPTION	MATERIAL	COLOR/FINISH	NO.
3-936059-1 (G)						
2-936059-1 (G)						
1-936059-3 (F)						
1-936059-1 (C)(D)						
936059-3 (G2)						
936059-2 (B)						
936059-1						

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JM JEON CHK JW JUNG APVD HG CHO PRODUCT SPEC - APPLICATION SPEC 114-18144 WEIGHT - CUSTOMER DRAWING		TE Connectivity NAME 2.8mm SELAED 2P PLUG ASSEMBLY (FLAT SENSOR CONNECTOR) SIZE A2 CAGE CODE 00779 DRAWING NO C=936059 RESTRICTED TO -			
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.3 3 PLC ± 4 PLC ± ANGLES ±3 FINISH -					
MATERIAL SEE TABLE							