


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/11/09	XXXXXX	INITIAL RELEASE

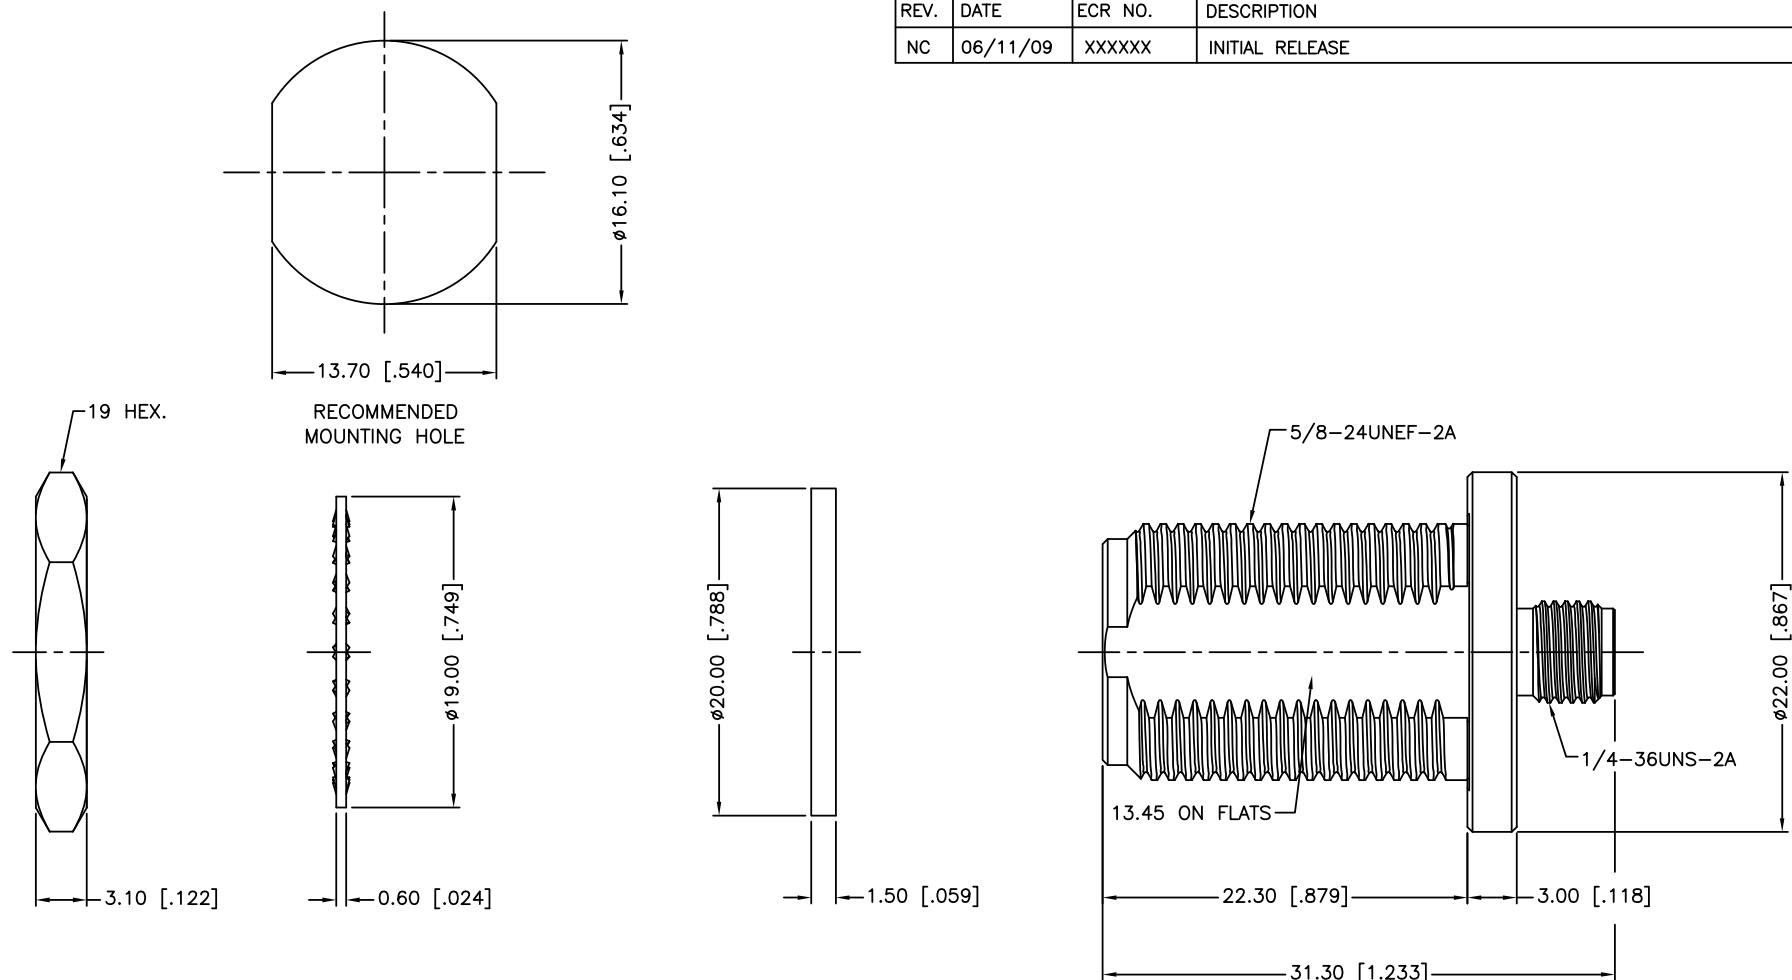

1. SEALING REQUIREMENT: IP-68 MUST WITHSTAND 3' DEPTH OF WATER FOR ONE HOUR WITHOUT ANY SIGNS OF LEAKAGE
2. MAX. PANEL THICKNESS= 6.8mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
8	HEX NUT	BRASS	NICKEL	1		DRAWN	M.ZHANG	06/11/09											
7	LOCK WASHER	BRASS	NICKEL	1		CHECKED													
6	GASKET	SILICONE	RED	1		ISSUED			PART DESCRIPTION										
5	HOUSING	BRASS	NICKEL	1		SHEET	1 OF 1		N FEMALE TO SMA FEMALE BULKHEAD ADAPTOR (IP 68)										
4	CONTACT PIN	BER. COPPER	GOLD	1				PART NO.		242125–10									
3	O–RING	SILICONE	RED	1															
2	INSULATOR	PTFE	NATURAL	1															
1	BODY	BRASS	NICKEL	1															
DESCRIPTION		MATERIAL	FINISH	QTY	CAD FILE			C:/CONNEX/242125–10.DWG			DWG. NO.	242125–10.DWG		REV.	NC	SIZE	A	SCALE	NA