


1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

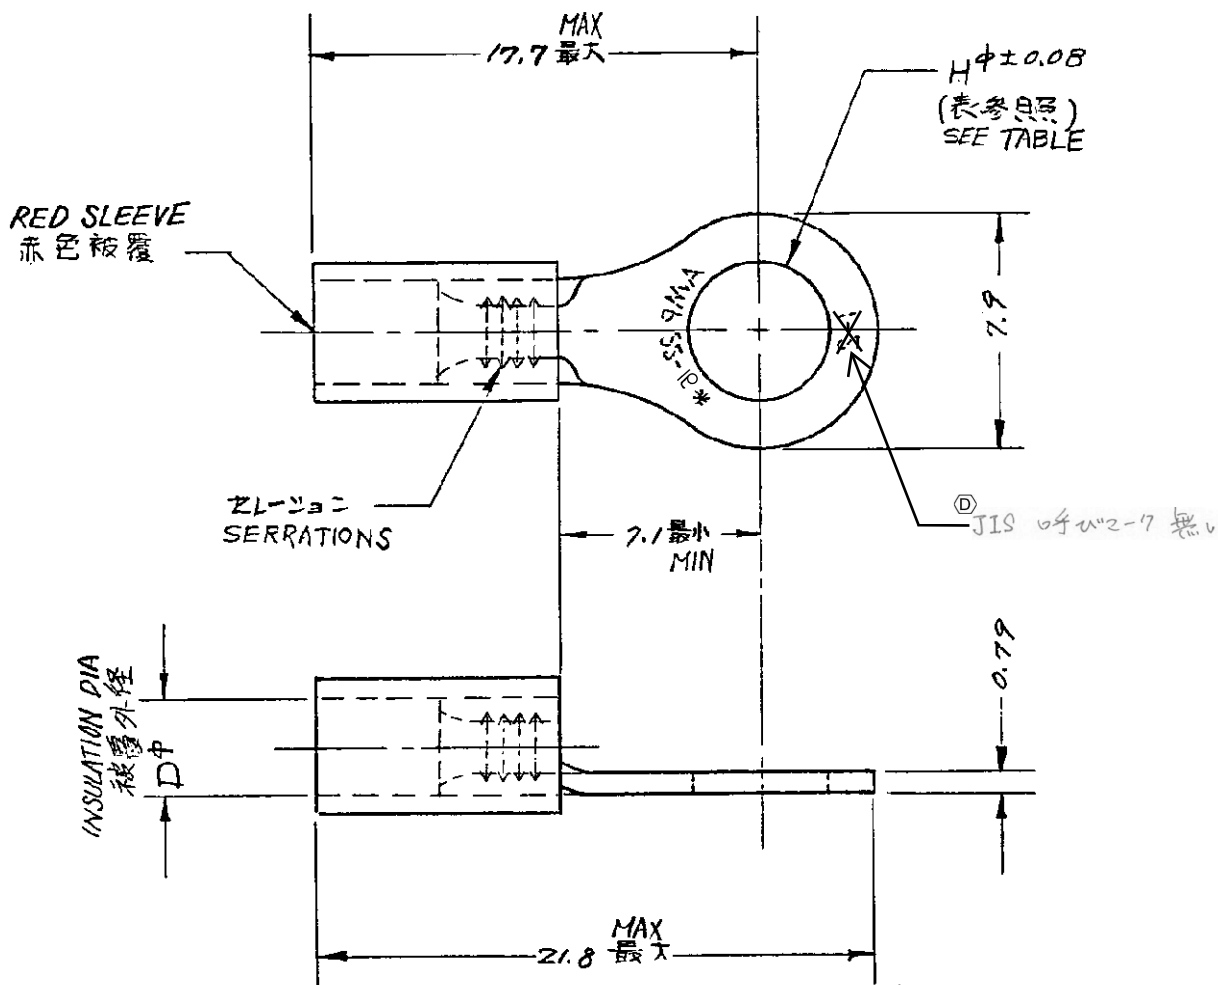

	P/N	STUD	INSULATION DIA			P/N	STUD	INSULATION DIA		
	型番	スタッド	Hφ	被覆外径Dφ		型番	スタッド	Hφ	被覆外径Dφ	
⑤	OBSOLETE	↑ 171509-1	#6	3.68	2.03 ~ 3.05	①	↑ 171509-6	#10	5	2.66 ~ 3.56
⑤	OBSOLETE	↑ -2	#8	4.34	2.03 ~ 3.05		↑ -7	5mm	⑤ 5.2	2.03 ~ 3.05
	OBSOLETE	↑ -3	#10	5	2.03 ~ 3.05		↑ ⑤ -8	5mm	5.26	2.66 ~ 3.56
⑤	OBSOLETE	↓ -4	#6	3.68	2.66 ~ 3.56	①	↑ 171509-9	SPEC.	5.79	2.03 ~ 3.05
⑤	OBSOLETE	↓ 171509-5	#8	4.34	2.66 ~ 3.56					

単位: 耗 DIMENSIONS IN MM	D	Change Applicable Body	Y.O	N.Y	23JAN17	E	OBSOLETE	Y.O	N.Y	14APR17	F	REVISED PER ECR-17-007066	T.G	N.Y	26MAY17	
	C2	REV PER ECO-10-000444	KK	AEG	08JAN10	参考図面 (CUSTOMER COPY REFERENCE ONLY)										
	C1	REVISED EGR-05-006866	Y.Y	D.M	15JUL05											
	C	-3 OBSOLETE (FJ00-1754-93)	Y.I	S.M	12/19/94	材料 MATERIAL: COPPER 電線 銅線		TE Connectivity								
	B	ADDED MARK	H.S	H.W	8/1/12	仕上げ FINISH: ANNEAL TIN PL 焼付 銅めっき										
	A	REVISED (P-DWG REV. A)	H.S	H.W	7/1/15	線径 WIRE RANGE: 0.26 ~ 1.04 mm (AWG 22-16)		線径 WIRE RANGE: 0.26 ~ 1.04 mm (AWG 22-16)								
	0	REVISED (P-DWG REV. C)	H.S	H.W	2/1/12	絶縁 INSULATION: SA 表層 52 TABLE IN		線径 WIRE RANGE: 0.26 ~ 1.04 mm (AWG 22-16)								
	LTR.	変更 (REVISION RECORD)	DR.	CHK.	DATE	公差 TOLERANCE: ±0.4 EXCEPT AS NOTED		縮尺 SCALE: 4:1		LOC: J		SIZE: A		品名 NO: C-171509		REV: F
	DR.	2/12/13	DES.	2/23/13		品名 (NAME): 丸型端子 WIRE TERMINAL ASSEMBLY										
	CHK.	2/26/13	APP.	2/26/13												