

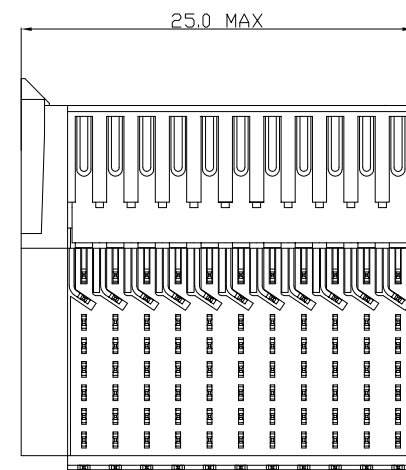
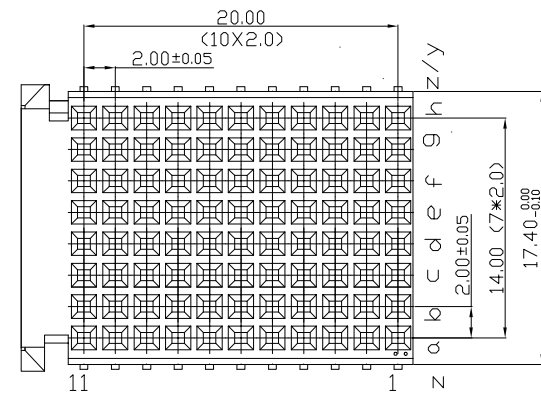


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

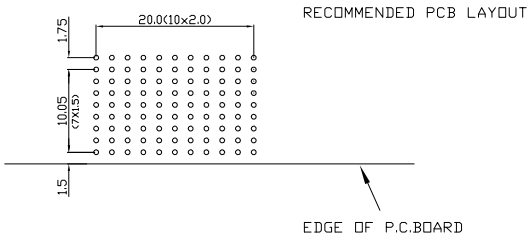

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

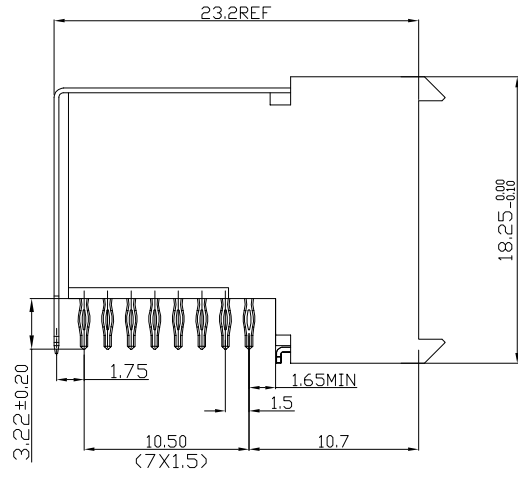

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. LEAD FREE INDICATOR (LF=LEAD FREE)
 PERFORMANCE LEVEL INDICATOR (REF. DWG NO.BSC 201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

				 www.fciconnect.com				tolerance 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN						
				Dr W.Panis		30-04-96		Product family MILLIPICS		size A4		Scale 3/1		
				Eng				Spec ref						
				Chr				Material		ECN				
				Appr										
rev	ecn no	dr	date	title MPACS 8+2R RA RCP CONN TYPE F SHIELDED W.O PEG						dwg no	BS,C ,202260,005		Rev. D	
A	CONVERSION REVISION 01	KN	14-09-01											
B	DG05-0381	Kason	10-10-05											
C	DG07-0362	Kason	05-09-07											
D	DG10-0110	NZ	05-30-10											
				catalog no						HM2R83PA8101----		CUMSTOMER		sheet 1 of 1