




1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.
5. APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY #1-23419-5 LOC-TITE TO THREADS.
6. CRIMP DATA QUOTED IS TO MEET ORIGINAL CUSTOMER REQUEST.
7. PACKARD HOUSING PART NUMBERS 12015792 & 12010973.

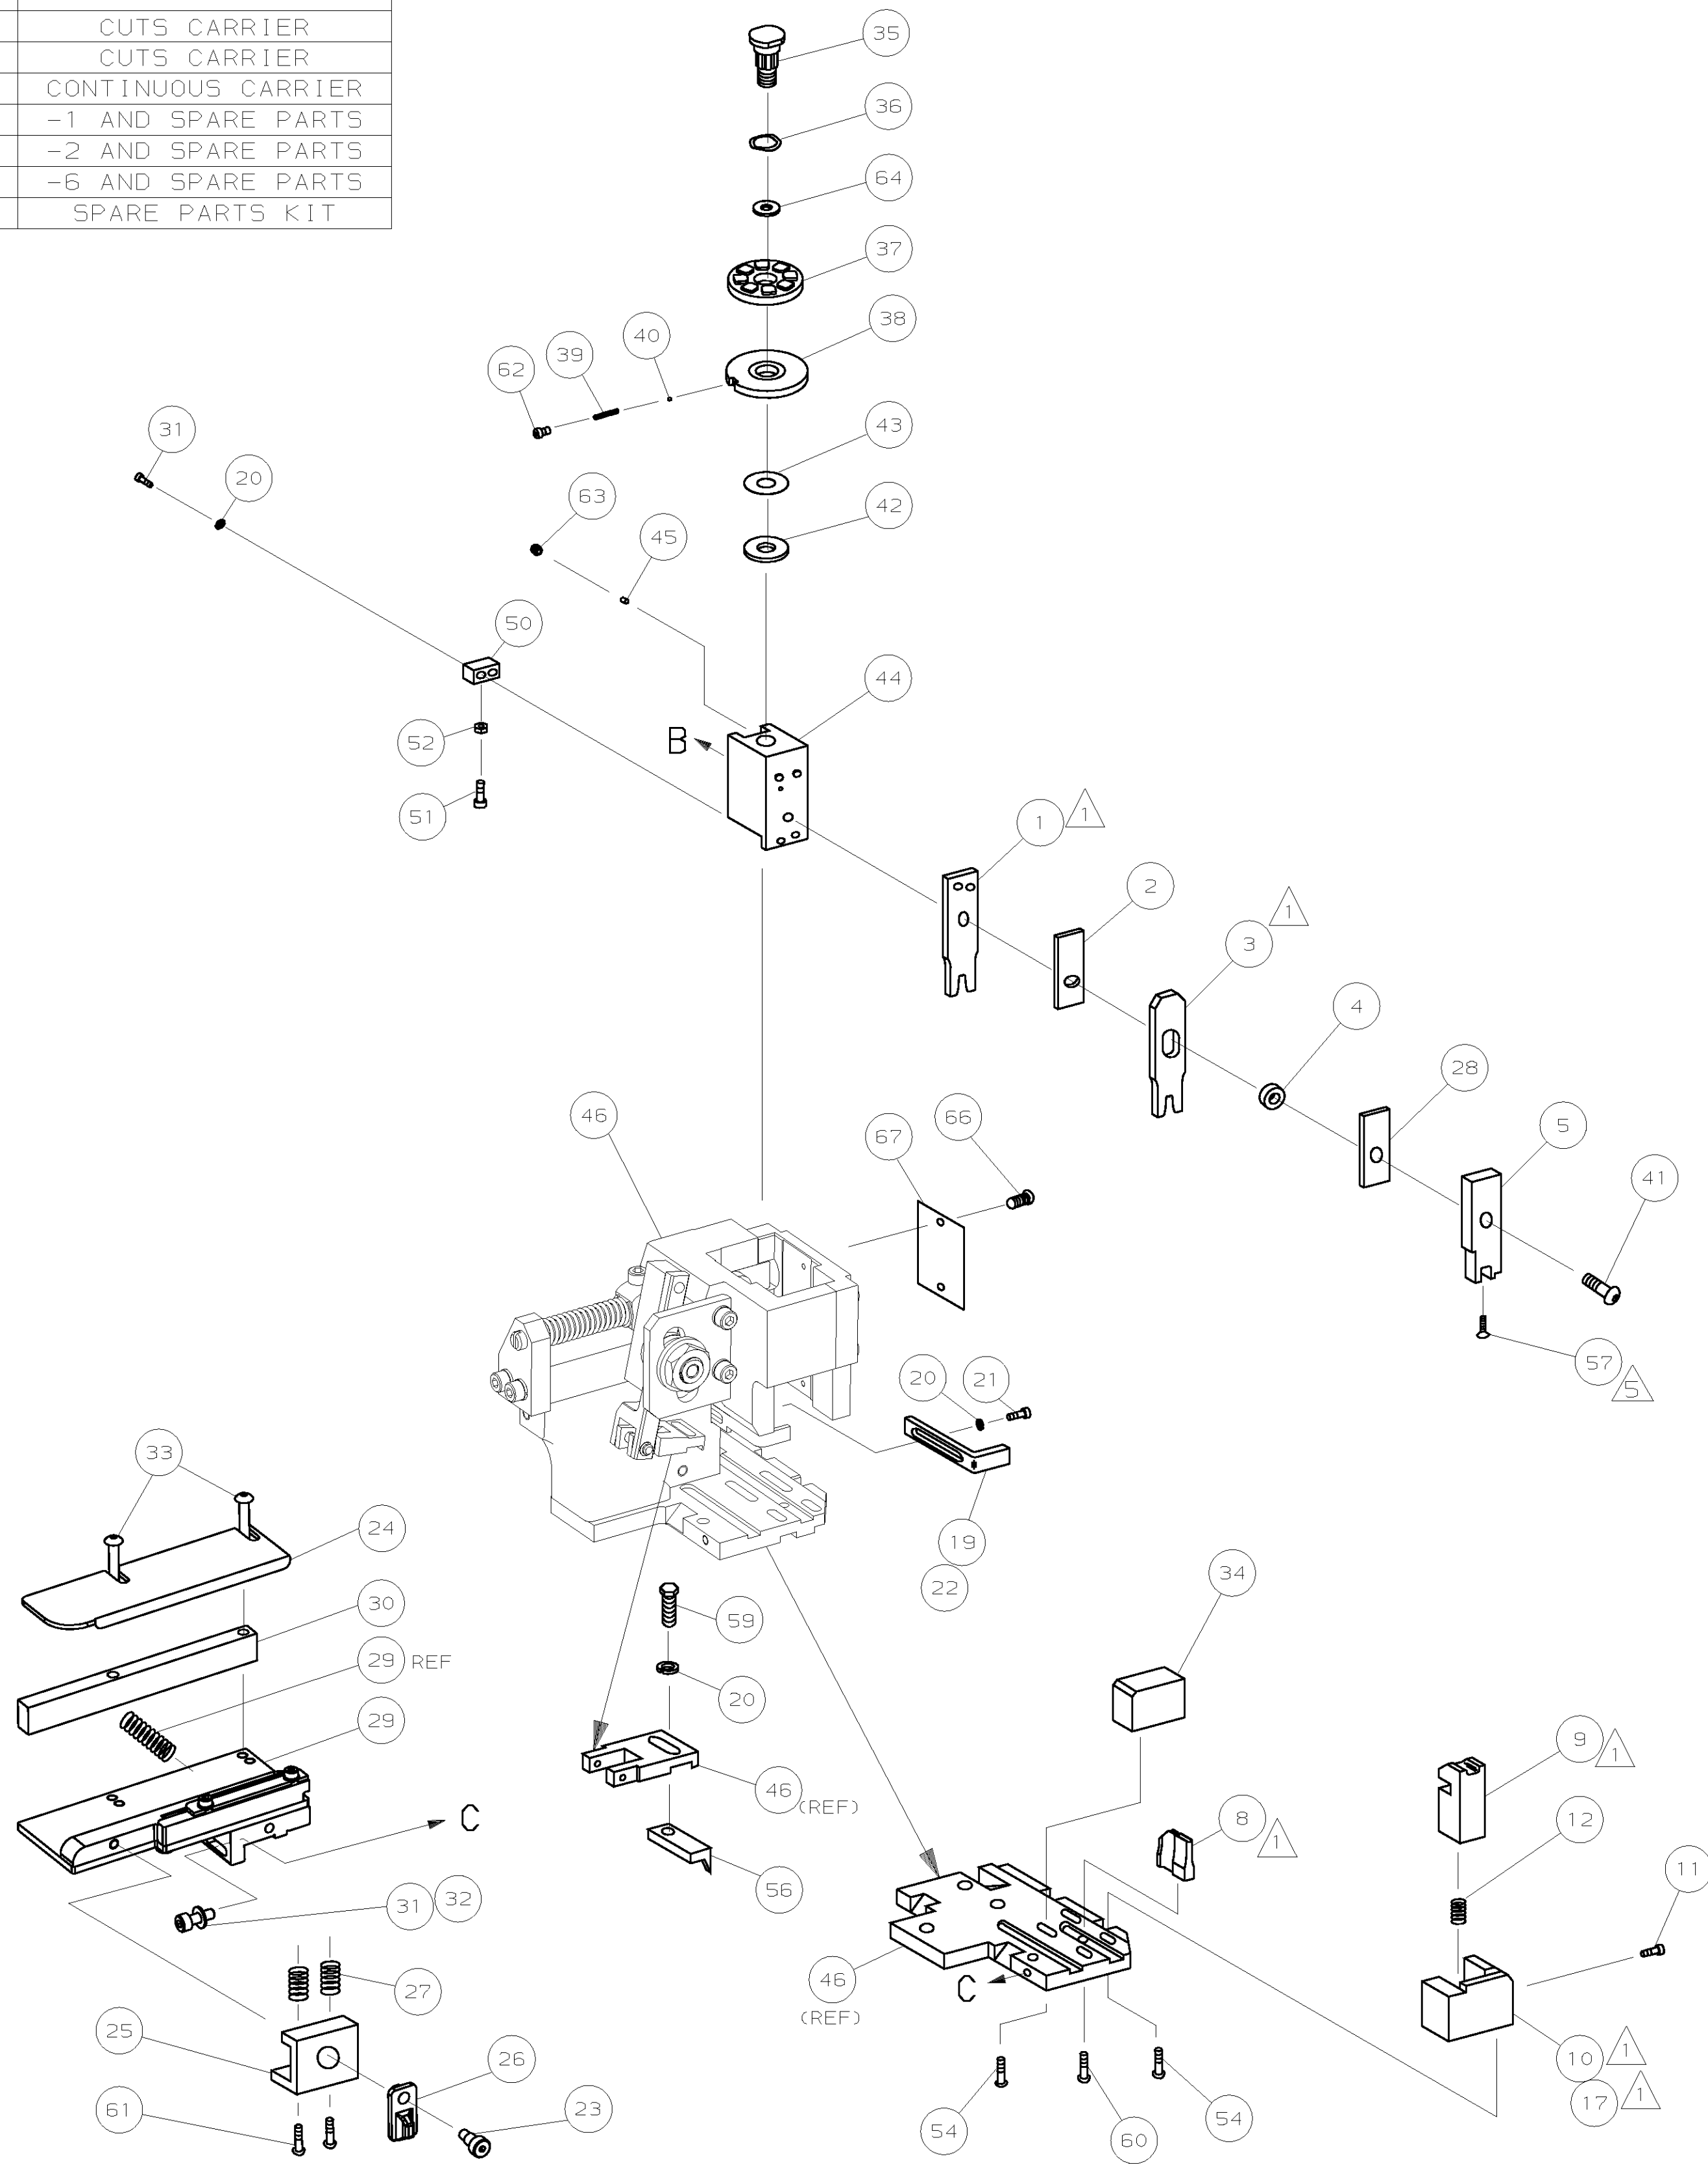

FENCE SET-UP DIM

QTY REQD PER ASSY				PARTS LIST							
DIMENSIONS: mm [INCHES] DO NOT SCALE PRINT.				MATL		HT TR		FIN			
TOLERANCES UNLESS OTHERWISE SPECIFIED:				DR 19JUN01		APP 19JUN01					
1 PLC DEC +0.5 [0.02 IN]				M.CL1FFORD		F.BACKHURST		AMP AMP Incorporated Harrisburg, PA 17105-3608			
2 PLC DEC ±				CHK -		REL 17OCT01					
3 PLC DEC ±						LADTHOUSE					
ANGLES ±				NAME				MACHINE REF			
SURF TEXTURE: ✓				SIDE FEED HD-I APPLICATOR				HD-I APPL			
REMOVE BURRS, BREAK				SCALE		DWG NO		1426216		SHEET	
SHARP EDGES RO.38 MAX				D						REV	
										1 of 1	
CASE CODE				RESTRICTED TO							
00779				CUSTOMER AND ASSEMBLY DRAWING							