




D-SUBMINIATURE CONNECTORS:

K42X Series

High Density Dual-Port D-Sub

K42X Series Dimensions

Dimensions in mm

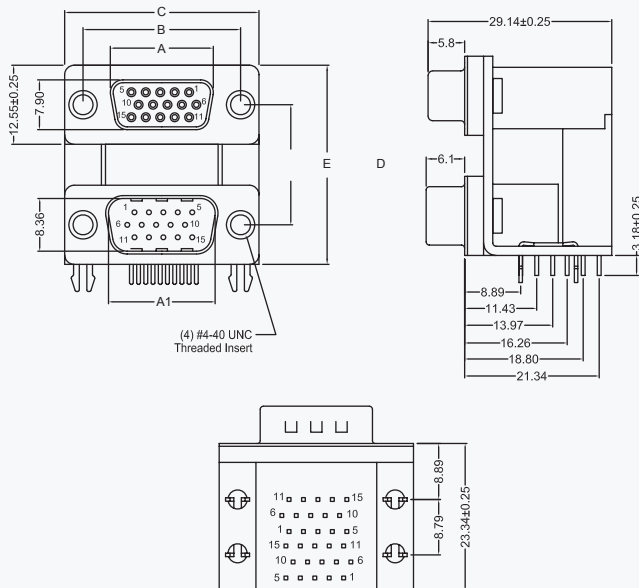

Number of Contacts (Shell Size)	Dimensions (Inch/ mm)			
	A	A1	B	C
9 (E)	.643	.666	.984	1.213
	16.33	16.92	24.99	30.81
15 (A)	.971	.994	1.312	1.541
	24.66	25.25	33.32	39.14
25 (B)	1.511	1.534	1.852	2.088
	38.38	38.96	47.04	53.04
37 (C)	2.159	2.181	2.500	2.729
	54.84	55.42	63.50	69.32

Center to Center Spacing	D	E
A	.750	1.244
	19.05	31.60
B	.900	1.394
	22.86	35.41
C	.625	1.119
	15.88	28.42

A = Exterior of Female Shell (S)

A1 = Interior of Male Shell (P)

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

Series Top/Bottom Shell Size Bottom Shell Size Center Distance Boardlock Option Jackscrews Option

Series

K42X - High Density Dual-Port D-Subminiature Connector

Top/Bottom Shell Size

A26S/S - 26 Contacts, Receptacle over Receptacle

B44S/S - 44 Contacts, Receptacle over Receptacle

E15S/P - 15 Contacts, Receptacle over Plug

E15S/S - 15 Contacts, Receptacle over Receptacle

Center to Center Distance

A - 0.750" (Standard)

Boardlocks Option

4N - Boardlocks (Standard)

Jackscrews Option

Blank - No Jackscrews

J - 4-40 Jackscrews Installed

Contact Kycon for Other Options