

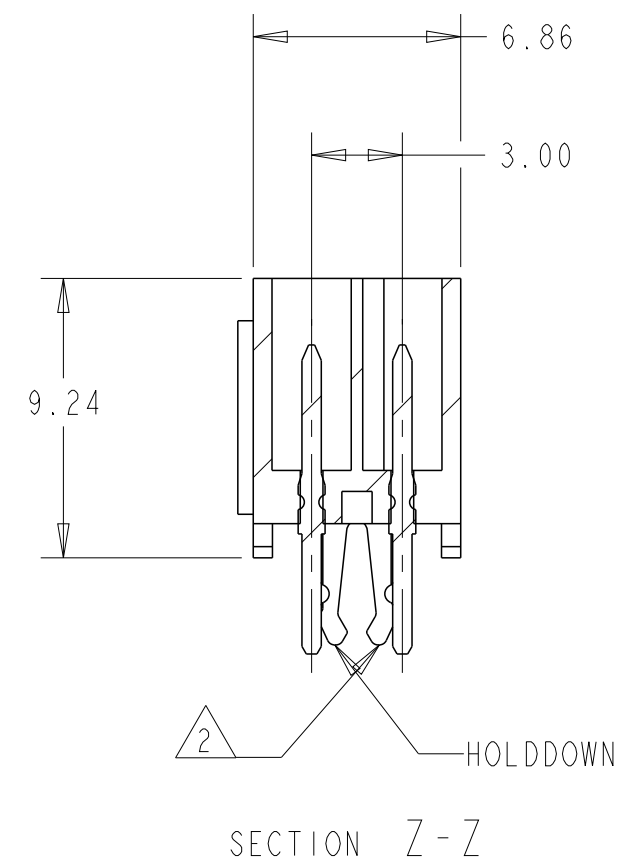



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	FI	REVISED PER ECR-16-011494	21JUN2017	NK	CX

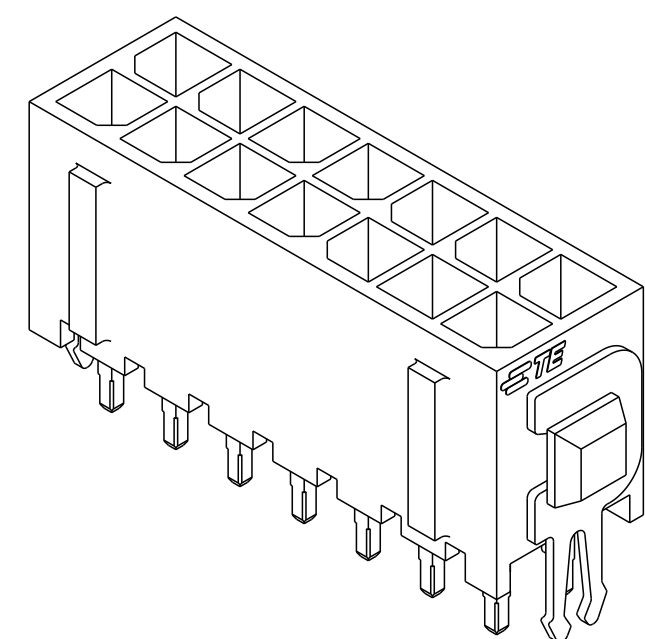

- 1 MATERIAL: HOUSING - HIGH TEMP. NYLON, UL 94V-0, BLACK.
CONTACT - BRASS.
HOLD DOWNS- PHOSPHOR BRONZE.
- 2 MAXIMUM INSERTION 30 LBS.
- 3 RECOMMENDED BOARD THICKNESS 1.57.
- 4 FINISH: CONTACT-2.54 μ m MINIMUM TIN-LEAD OVER
1.27 μ m MINIMUM NICKEL.
HOLD DOWNS-2.54 μ m TIN-LEAD
- 5 FINISH: CONTACT - 2.54 μ m MINIMUM MATTE TIN
OVER 1.27 μ m MINIMUM NICKEL.
HOLD DOWNS- 2.54 μ m MATTE TIN

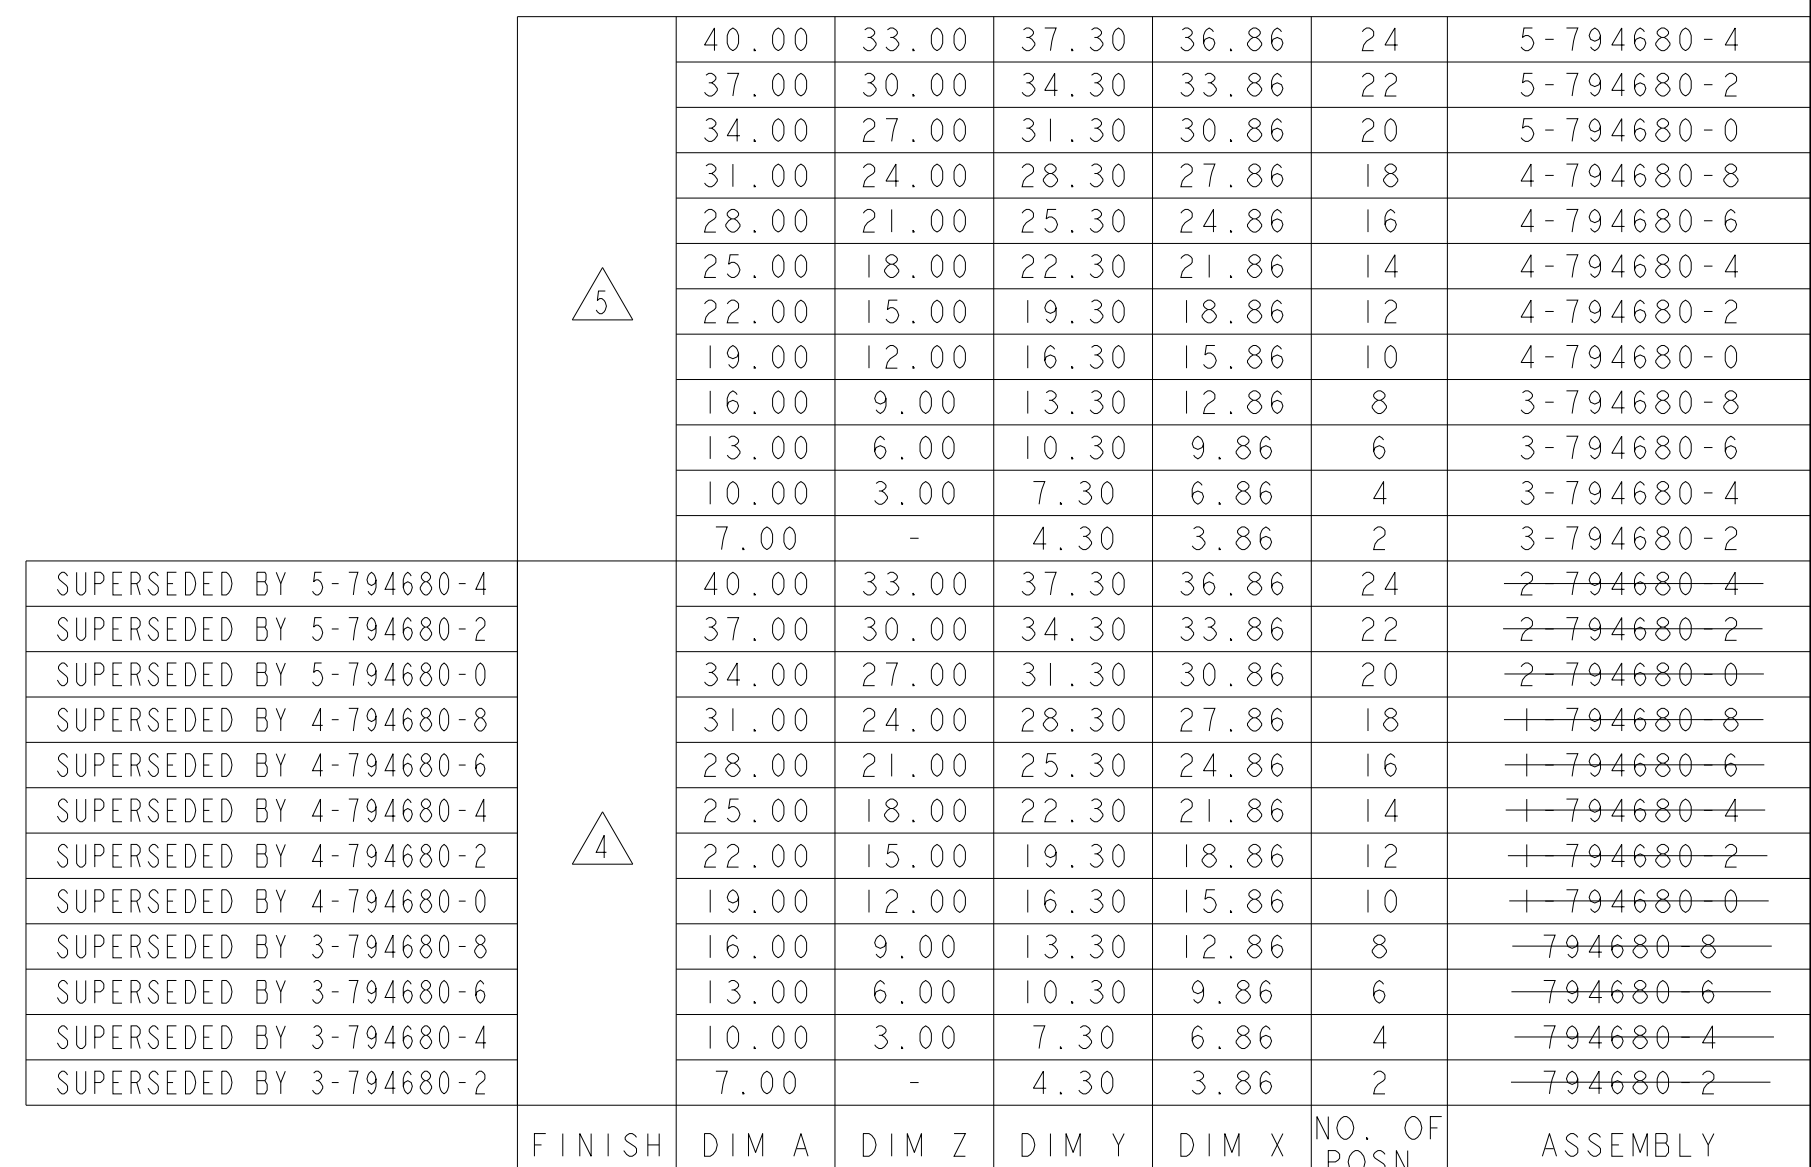

3 DIMENSIONAL MODEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23-MAR-2005 S. HOOVER CHK 23-MAR-2005 C. JONES APVD 23-MAR-2005 C. JONES		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, TIN, DUAL ROW, MICRO MATE-N-LOK(TM)	
		PRODUCT SPEC -			
MATERIAL		FINISH		SIZE A2	
		SEE TABLE		CAGE CODE 00779	
				DRAWING NO C-794680	
				RESTRICTED TO -	
CUSTOMER DRAWING				SCALE	4:1
				SHEET	OF
				REV	F