
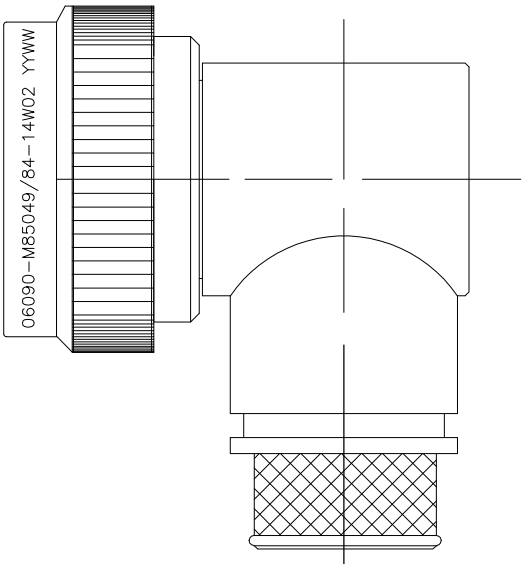


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REV PER ECO 17-004923	5-31-17	CT	EH


1. THIS PRODUCT IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR, AND DESIGNED TO MEET PERFORMANCE REQUIREMENT OF AS85049/84.
2. ALL COMPONENTS SHALL BE PACKAGED AND SUPPLIED IN A PLASTIC BAG AND LABELED WITH M85049/84 DESIGNATION e g, M85049/84-14W02.
3. PART SUPPLIED WITH STANDARD DETENTED SELF-LOCKING WHICH PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING.
4. THIS ADAPTER MATES TO CONNECTOR SAE-AS50151 CRIMP, MIL-DTL-26482 SERIES 2, SAE-AS81703 SERIES 3, AND MIL-DTL-83723 SERIES III.
5. FOR MATERIAL AND FINISH INFORMATION REFER TO R85049.
FOR ALTERNATIVE MATERIALS AND PLATING FINISHES CONTACT TE CONNECTIVITY.



SELF-LOCKING
SHIELD BAND TERMINATION
SHRINK BOOT ACCOMMODATION 90° ADAPTER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 31MAY2017		 TE Connectivity			
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK E.HALEY 5-31-17					
		APVD E.HALEY 5-31-17					
		PRODUCT SPEC —					
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —	APPLICATION SPEC —	NAME BACKSHELL,90 DEG,SELF LOCKING SHIELD BAND TERMINATION,SHRINK BOOT ACCOMMODATION				
		—					
		—					
MATERIAL —	FINISH —	WEIGHT 0.000000	SIZE A3	CAGE CODE 00779	DRAWING NO C-R85049/84	RESTRICTED TO —	
CUSTOMER DRAWING					SCALE NTS	SHEET 1 OF 3	REV C




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

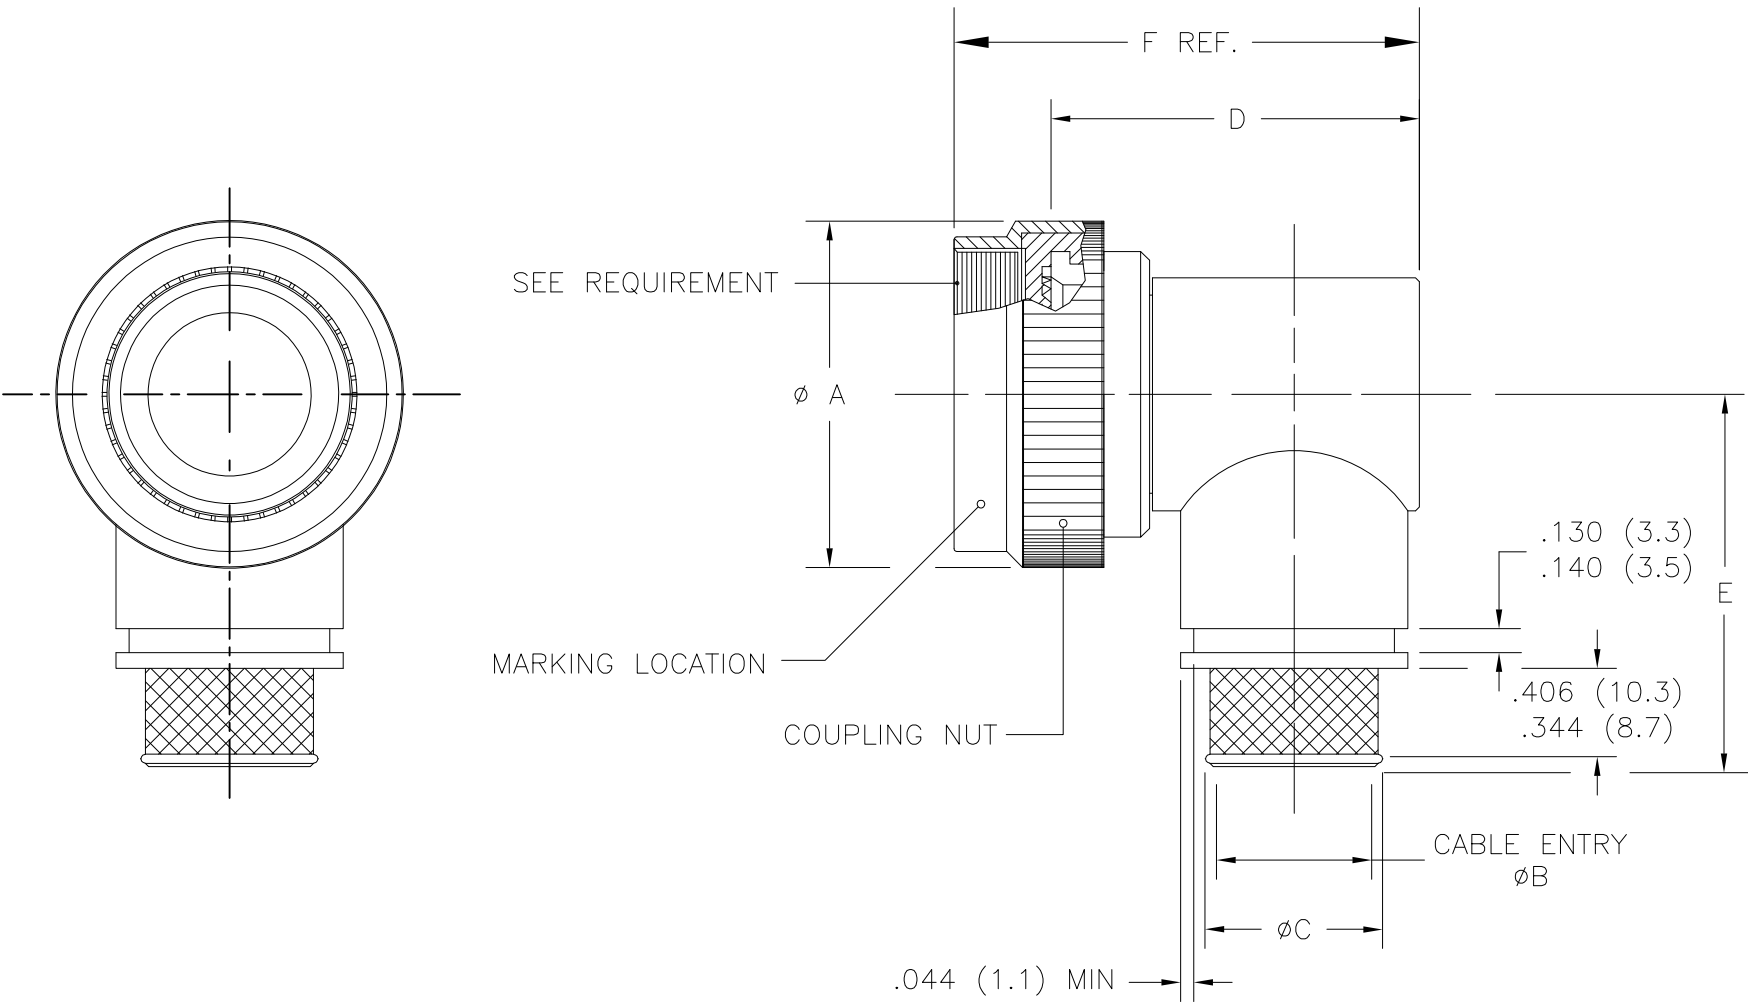

PART NUMBERING



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 31MAY2017	TE Connectivity			
		CHK E.HALEY 5-31-17				
DIMENSIONS: INCHES		APVD E.HALEY 5-31-17	NAME BACKSHELL,90 DEG,SELF LOCKING SHIELD BAND TERMINATION,SHRINK BOOT ACCOMMODATION			
		PRODUCT SPEC	SIZE		CAGE CODE	DRAWING NO
		APPLICATION SPEC	—		—	RESTRICTED TO
MATERIAL		FINISH	WEIGHT		A3 00779 C-R85049/84	
—		—	CUSTOMER DRAWING		SCALE	SHEET
			NTS		2 OF 3	REV C

4		3		2		1																																																																																																																																		
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION																																																																																																																																				
© COPYRIGHT — TE Connectivity				ALL RIGHTS RESERVED.																																																																																																																																				
						REVISIONS																																																																																																																																		
P		LTR		DESCRIPTION			DATE		DWN		APVD																																																																																																																													
		—		SEE SHEET 1			—		—		—																																																																																																																													
<table><tr><td rowspan="3">ORDER NUMBER</td><td colspan="4">FOR CONNECTOR SHELL SIZE (REF)</td><td colspan="6">TABLE I — SHELL SIZE AND DIMENSIONS</td></tr><tr><td rowspan="2">SAE— AS81703 SERIES 3</td><td rowspan="2">MIL—DTL— 26482 SERIES 2</td><td rowspan="2">SAE— AS50151 CRIMP</td><td rowspan="2">MIL—DTL— 83723 SERIES III</td><td>ØA MAX</td><td colspan="2">ØB ±.010 ENTRY SIZE</td><td colspan="2">ØC REF</td></tr><tr><td></td><td>02</td><td>03</td><td>02</td><td>03</td></tr><tr><td>8</td><td>--</td><td>8</td><td>8S</td><td>8</td><td>.885 (22.48)</td><td>N/A</td><td>.250 (6.35)</td><td>N/A</td><td>.395 (10.03)</td></tr><tr><td>10</td><td>--</td><td>10</td><td>10S, 10SL</td><td>10</td><td>1.010 (25.65)</td><td>N/A</td><td>.312 (7.92)</td><td>N/A</td><td>.457 (11.61)</td></tr><tr><td>12</td><td>7</td><td>12</td><td>12S AND 12</td><td>12</td><td>1.135 (28.83)</td><td>.312 (7.92)</td><td>.438 (11.13)</td><td>.457 (11.60)</td><td>.583 (14.81)</td></tr><tr><td>14</td><td>12</td><td>14</td><td>14S AND 14</td><td>14</td><td>1.260 (32.00)</td><td>.438 (11.13)</td><td>.562 (14.27)</td><td>.583 (14.81)</td><td>.707 (17.96)</td></tr><tr><td>16</td><td>19</td><td>16</td><td>16S AND 16</td><td>16</td><td>1.385 (35.18)</td><td>.500 (12.70)</td><td>.625 (15.88)</td><td>.645 (16.38)</td><td>.770 (19.56)</td></tr><tr><td>18</td><td>27</td><td>18</td><td>18</td><td>18</td><td>1.510 (38.35)</td><td>.625 (15.88)</td><td>.750 (19.05)</td><td>.770 (19.56)</td><td>.895 (22.73)</td></tr><tr><td>20</td><td>37</td><td>20</td><td>20</td><td>20</td><td>1.635 (41.53)</td><td>.625 (15.88)</td><td>.812 (20.62)</td><td>.770 (19.56)</td><td>.957 (24.31)</td></tr><tr><td>22</td><td>--</td><td>22</td><td>22</td><td>22</td><td>1.760 (44.70)</td><td>.688 (17.48)</td><td>.938 (23.83)</td><td>.829 (21.06)</td><td>1.083 (27.51)</td></tr><tr><td>24</td><td>--</td><td>24</td><td>24</td><td>24</td><td>1.885 (47.88)</td><td>.750 (19.05)</td><td>1.000 (25.40)</td><td>.895 (22.73)</td><td>1.145 (29.08)</td></tr><tr><td>28</td><td>--</td><td>--</td><td>28</td><td>--</td><td>2.135 (54.23)</td><td>.875 (22.23)</td><td>1.125 (28.58)</td><td>1.020 (25.91)</td><td>1.270 (32.26)</td></tr></table>												ORDER NUMBER	FOR CONNECTOR SHELL SIZE (REF)				TABLE I — SHELL SIZE AND DIMENSIONS						SAE— AS81703 SERIES 3	MIL—DTL— 26482 SERIES 2	SAE— AS50151 CRIMP	MIL—DTL— 83723 SERIES III	ØA MAX	ØB ±.010 ENTRY SIZE		ØC REF			02	03	02	03	8	--	8	8S	8	.885 (22.48)	N/A	.250 (6.35)	N/A	.395 (10.03)	10	--	10	10S, 10SL	10	1.010 (25.65)	N/A	.312 (7.92)	N/A	.457 (11.61)	12	7	12	12S AND 12	12	1.135 (28.83)	.312 (7.92)	.438 (11.13)	.457 (11.60)	.583 (14.81)	14	12	14	14S AND 14	14	1.260 (32.00)	.438 (11.13)	.562 (14.27)	.583 (14.81)	.707 (17.96)	16	19	16	16S AND 16	16	1.385 (35.18)	.500 (12.70)	.625 (15.88)	.645 (16.38)	.770 (19.56)	18	27	18	18	18	1.510 (38.35)	.625 (15.88)	.750 (19.05)	.770 (19.56)	.895 (22.73)	20	37	20	20	20	1.635 (41.53)	.625 (15.88)	.812 (20.62)	.770 (19.56)	.957 (24.31)	22	--	22	22	22	1.760 (44.70)	.688 (17.48)	.938 (23.83)	.829 (21.06)	1.083 (27.51)	24	--	24	24	24	1.885 (47.88)	.750 (19.05)	1.000 (25.40)	.895 (22.73)	1.145 (29.08)	28	--	--	28	--	2.135 (54.23)	.875 (22.23)	1.125 (28.58)	1.020 (25.91)	1.270 (32.26)
ORDER NUMBER	FOR CONNECTOR SHELL SIZE (REF)				TABLE I — SHELL SIZE AND DIMENSIONS																																																																																																																																			
	SAE— AS81703 SERIES 3	MIL—DTL— 26482 SERIES 2	SAE— AS50151 CRIMP	MIL—DTL— 83723 SERIES III	ØA MAX	ØB ±.010 ENTRY SIZE		ØC REF																																																																																																																																
						02	03	02	03																																																																																																																															
8	--	8	8S	8	.885 (22.48)	N/A	.250 (6.35)	N/A	.395 (10.03)																																																																																																																															
10	--	10	10S, 10SL	10	1.010 (25.65)	N/A	.312 (7.92)	N/A	.457 (11.61)																																																																																																																															
12	7	12	12S AND 12	12	1.135 (28.83)	.312 (7.92)	.438 (11.13)	.457 (11.60)	.583 (14.81)																																																																																																																															
14	12	14	14S AND 14	14	1.260 (32.00)	.438 (11.13)	.562 (14.27)	.583 (14.81)	.707 (17.96)																																																																																																																															
16	19	16	16S AND 16	16	1.385 (35.18)	.500 (12.70)	.625 (15.88)	.645 (16.38)	.770 (19.56)																																																																																																																															
18	27	18	18	18	1.510 (38.35)	.625 (15.88)	.750 (19.05)	.770 (19.56)	.895 (22.73)																																																																																																																															
20	37	20	20	20	1.635 (41.53)	.625 (15.88)	.812 (20.62)	.770 (19.56)	.957 (24.31)																																																																																																																															
22	--	22	22	22	1.760 (44.70)	.688 (17.48)	.938 (23.83)	.829 (21.06)	1.083 (27.51)																																																																																																																															
24	--	24	24	24	1.885 (47.88)	.750 (19.05)	1.000 (25.40)	.895 (22.73)	1.145 (29.08)																																																																																																																															
28	--	--	28	--	2.135 (54.23)	.875 (22.23)	1.125 (28.58)	1.020 (25.91)	1.270 (32.26)																																																																																																																															
<table><tr><td rowspan="2">ORDER NUMBER</td><td colspan="4">FOR CONNECTOR SHELL SIZE (REF)</td><td colspan="3">TABLE I — SHELL SIZE AND DIMENSIONS (CONTINUED)</td></tr><tr><td>SAE— AS81703 SERIES 3</td><td>MIL—DTL— 26482 SERIES 2</td><td>SAE— AS50151 CRIMP</td><td>MIL—DTL— 83723 SERIES III</td><td>D MAX</td><td>E MAX</td><td>F REF</td></tr><tr><td>8</td><td>--</td><td>8</td><td>8S</td><td>8</td><td>1.19 (30.2)</td><td>1.42 (36.1)</td><td>1.50 (38.1)</td></tr><tr><td>10</td><td>--</td><td>10</td><td>10S, 10SL</td><td>10</td><td>1.28 (32.5)</td><td>1.48 (37.6)</td><td>1.59 (40.4)</td></tr><tr><td>12</td><td>7</td><td>12</td><td>12S AND 12</td><td>12</td><td>1.41 (35.8)</td><td>1.54 (39.1)</td><td>1.72 (43.7)</td></tr><tr><td>14</td><td>12</td><td>14</td><td>14S AND 14</td><td>14</td><td>1.53 (38.9)</td><td>1.61 (40.9)</td><td>1.84 (46.7)</td></tr><tr><td>16</td><td>19</td><td>16</td><td>16S AND 16</td><td>16</td><td>1.66 (42.2)</td><td>1.67 (42.4)</td><td>1.97 (50.0)</td></tr><tr><td>18</td><td>27</td><td>18</td><td>18</td><td>18</td><td>1.72 (43.7)</td><td>1.73 (43.9)</td><td>2.03 (51.6)</td></tr><tr><td>20</td><td>37</td><td>20</td><td>20</td><td>20</td><td>1.84 (46.7)</td><td>1.79 (45.5)</td><td>2.15 (54.6)</td></tr><tr><td>22</td><td>--</td><td>22</td><td>22</td><td>22</td><td>1.94 (49.3)</td><td>1.85 (47.0)</td><td>2.25 (57.1)</td></tr><tr><td>24</td><td>--</td><td>24</td><td>24</td><td>24</td><td>2.09 (53.1)</td><td>1.92 (48.8)</td><td>2.40 (61.0)</td></tr><tr><td>28</td><td>--</td><td>--</td><td>28</td><td>--</td><td>2.53 (64.3)</td><td>2.04 (51.8)</td><td>3.00 (76.2)</td></tr></table>												ORDER NUMBER	FOR CONNECTOR SHELL SIZE (REF)				TABLE I — SHELL SIZE AND DIMENSIONS (CONTINUED)			SAE— AS81703 SERIES 3	MIL—DTL— 26482 SERIES 2	SAE— AS50151 CRIMP	MIL—DTL— 83723 SERIES III	D MAX	E MAX	F REF	8	--	8	8S	8	1.19 (30.2)	1.42 (36.1)	1.50 (38.1)	10	--	10	10S, 10SL	10	1.28 (32.5)	1.48 (37.6)	1.59 (40.4)	12	7	12	12S AND 12	12	1.41 (35.8)	1.54 (39.1)	1.72 (43.7)	14	12	14	14S AND 14	14	1.53 (38.9)	1.61 (40.9)	1.84 (46.7)	16	19	16	16S AND 16	16	1.66 (42.2)	1.67 (42.4)	1.97 (50.0)	18	27	18	18	18	1.72 (43.7)	1.73 (43.9)	2.03 (51.6)	20	37	20	20	20	1.84 (46.7)	1.79 (45.5)	2.15 (54.6)	22	--	22	22	22	1.94 (49.3)	1.85 (47.0)	2.25 (57.1)	24	--	24	24	24	2.09 (53.1)	1.92 (48.8)	2.40 (61.0)	28	--	--	28	--	2.53 (64.3)	2.04 (51.8)	3.00 (76.2)																														
ORDER NUMBER	FOR CONNECTOR SHELL SIZE (REF)				TABLE I — SHELL SIZE AND DIMENSIONS (CONTINUED)																																																																																																																																			
	SAE— AS81703 SERIES 3	MIL—DTL— 26482 SERIES 2	SAE— AS50151 CRIMP	MIL—DTL— 83723 SERIES III	D MAX	E MAX	F REF																																																																																																																																	
8	--	8	8S	8	1.19 (30.2)	1.42 (36.1)	1.50 (38.1)																																																																																																																																	
10	--	10	10S, 10SL	10	1.28 (32.5)	1.48 (37.6)	1.59 (40.4)																																																																																																																																	
12	7	12	12S AND 12	12	1.41 (35.8)	1.54 (39.1)	1.72 (43.7)																																																																																																																																	
14	12	14	14S AND 14	14	1.53 (38.9)	1.61 (40.9)	1.84 (46.7)																																																																																																																																	
16	19	16	16S AND 16	16	1.66 (42.2)	1.67 (42.4)	1.97 (50.0)																																																																																																																																	
18	27	18	18	18	1.72 (43.7)	1.73 (43.9)	2.03 (51.6)																																																																																																																																	
20	37	20	20	20	1.84 (46.7)	1.79 (45.5)	2.15 (54.6)																																																																																																																																	
22	--	22	22	22	1.94 (49.3)	1.85 (47.0)	2.25 (57.1)																																																																																																																																	
24	--	24	24	24	2.09 (53.1)	1.92 (48.8)	2.40 (61.0)																																																																																																																																	
28	--	--	28	--	2.53 (64.3)	2.04 (51.8)	3.00 (76.2)																																																																																																																																	
<table><tr><td colspan="2">THIS DRAWING IS A CONTROLLED DOCUMENT.</td><td colspan="2">DWN C.C.THOMAS 31MAY2017</td><td colspan="4" rowspan="2"> TE Connectivity</td></tr><tr><td colspan="2">DIMENSIONS: INCHES</td><td colspan="2">CHK E.HALEY 5-31-17</td></tr><tr><td colspan="2" rowspan="3"></td><td colspan="2" rowspan="3">TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —</td><td colspan="2">APVD E.HALEY 5-31-17</td><td colspan="2" rowspan="3">NAME BACKSHELL,90 DEG,SELF LOCKING SHIELD BAND TERMINATION,SHRINK BOOT ACCOMMODATION</td></tr><tr><td colspan="2">PRODUCT SPEC</td></tr><tr><td colspan="2">APPLICATION SPEC</td></tr><tr><td colspan="2">MATERIAL —</td><td colspan="2">FINISH —</td><td colspan="2">WEIGHT 0.000000</td><td colspan="2">A300779</td><td colspan="2">C=R85049/84</td><td colspan="2">RESTRICTED TO —</td></tr><tr><td colspan="6">CUSTOMER DRAWING</td><td colspan="2">SCALE NTS</td><td colspan="2">SHEET 3 OF 3</td><td colspan="2">REV C</td></tr></table>						THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 31MAY2017		 TE Connectivity				DIMENSIONS: INCHES		CHK E.HALEY 5-31-17				TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		APVD E.HALEY 5-31-17		NAME BACKSHELL,90 DEG,SELF LOCKING SHIELD BAND TERMINATION,SHRINK BOOT ACCOMMODATION		PRODUCT SPEC		APPLICATION SPEC		MATERIAL —		FINISH —		WEIGHT 0.000000		A300779		C=R85049/84		RESTRICTED TO —		CUSTOMER DRAWING						SCALE NTS		SHEET 3 OF 3		REV C																																																																																				
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 31MAY2017		 TE Connectivity																																																																																																																																				
DIMENSIONS: INCHES		CHK E.HALEY 5-31-17																																																																																																																																						
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		APVD E.HALEY 5-31-17		NAME BACKSHELL,90 DEG,SELF LOCKING SHIELD BAND TERMINATION,SHRINK BOOT ACCOMMODATION																																																																																																																																		
				PRODUCT SPEC																																																																																																																																				
				APPLICATION SPEC																																																																																																																																				
MATERIAL —		FINISH —		WEIGHT 0.000000		A300779		C=R85049/84		RESTRICTED TO —																																																																																																																														
CUSTOMER DRAWING						SCALE NTS		SHEET 3 OF 3		REV C																																																																																																																														