JAE

NEW

ES3 Series JF3 Type (cULus Certified Product)

CONNECTOR

MB-0257-1

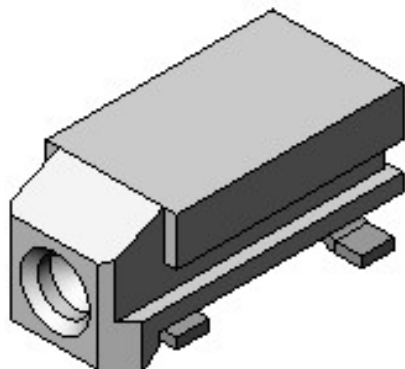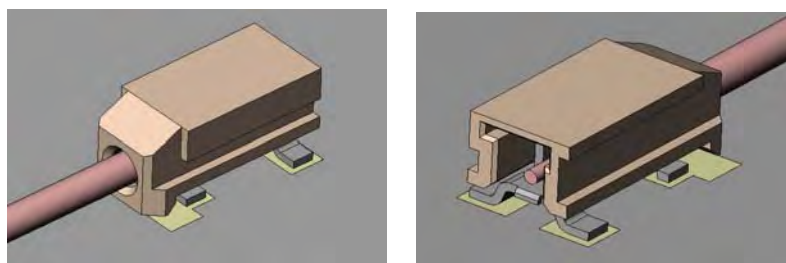December 2012

RoHS compliant

Image of cable insertion

The ES3 Series (JF3 type) is a compact, low-profile 1-pin cable insertion type connector. This connector is well suited for use in a wide range of applications including LED lighting, LCD TV backlight, tablet PC, and other compact devices.
The ES3 Series (JF3 type) is cULus certified.

Features

■cULus certification: File No. E67741   c**UL**us

■No harness assembly, single cable insertion

■Taper at the insertion opening for easy cable insertion
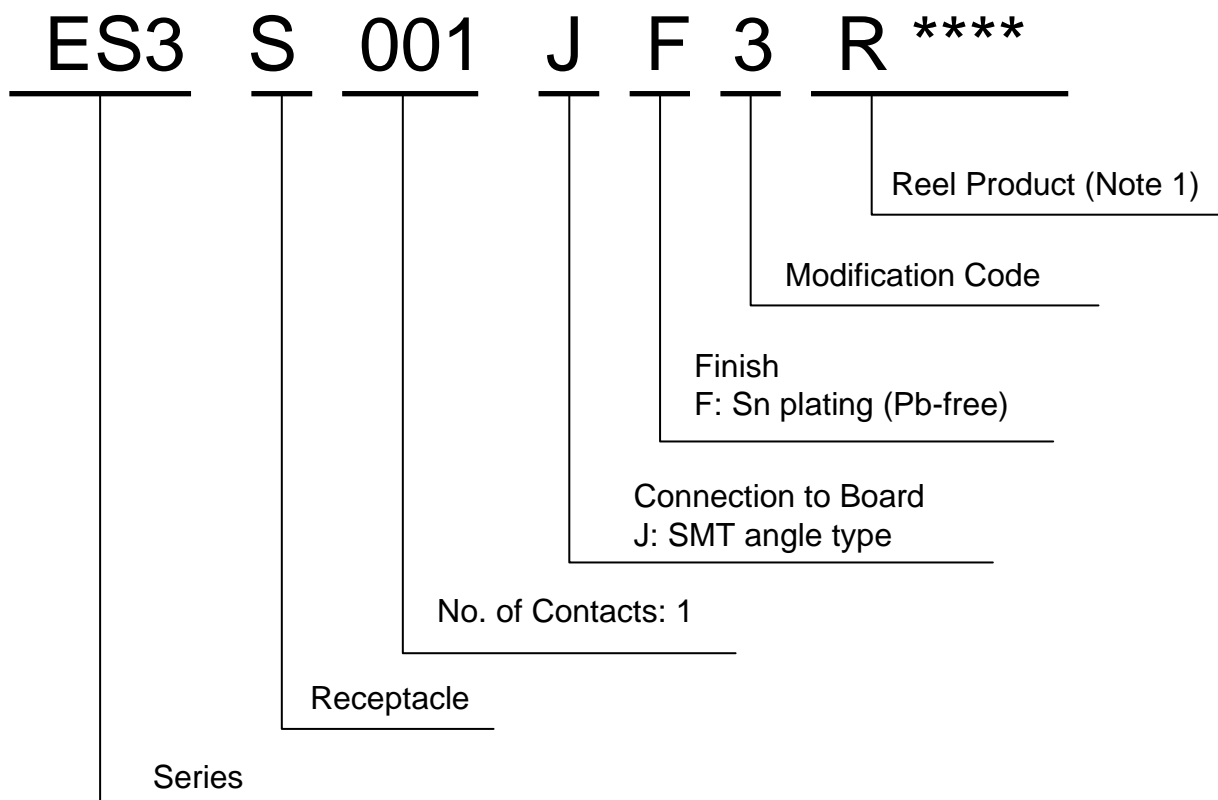
■Embossed tape packaging for automated mounting

General Specifications

■No. of Contacts: 1 position

■Contact Resistance: 30mΩmax.

■Rated Current: 2A

■Mating Cycles: 5 times

■Operating Temperature: -40 Deg. C to 105 Deg. C

■Applicable Wire: 26AWG to 24AWG (Single wire)
(diameter 0.4 to 0.51mm)
Outer cable diameter: 1.15mm max.
(recommended)
*Stranded wire (including pre-soldered)
not applicable.

Materials and Finishes

Component	Material / Finish
Insulator	LCP
Contact	Copper alloy / Sn plating

Ordering Information

ES3   S   001   J   F   3   R**

Reel Product (Note 1)

Modification Code

Finish
F: Sn plating (Pb-free)

Connection to Board
J: SMT angle type

No. of Contacts: 1

Receptacle

Series

Note 1: An embossed tape reel contains 3,300 pieces.

Product Drawing

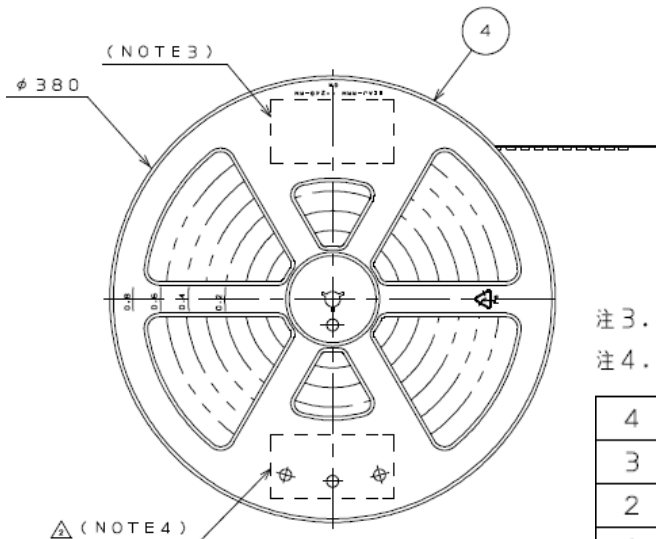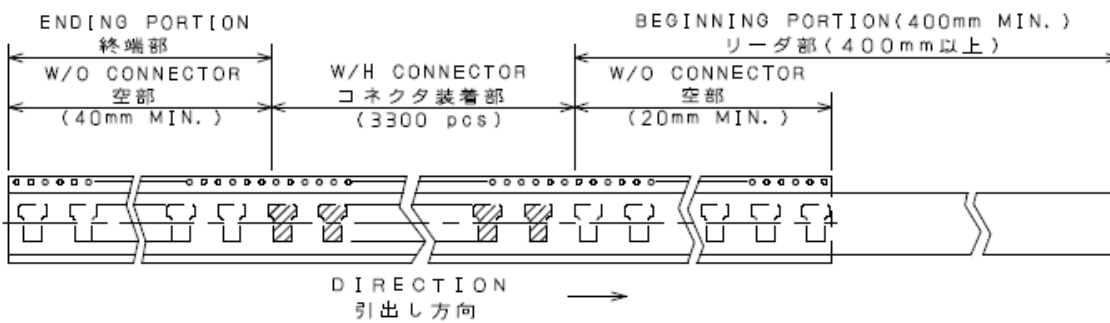| Part Number	ES3S001JF3
Drawing No.	SJ111054

LISTED BY UL/cUL

±0.15
3

±0.15
2.9

±0.15
3.6

±0.15
6.5

(0.2)

(0.5)

2

1

(5.5) (0.5)

(2)

(EFFECTIVE
CONTACT LENGTH)
有効接触長

(φ0.4)

(1.25)
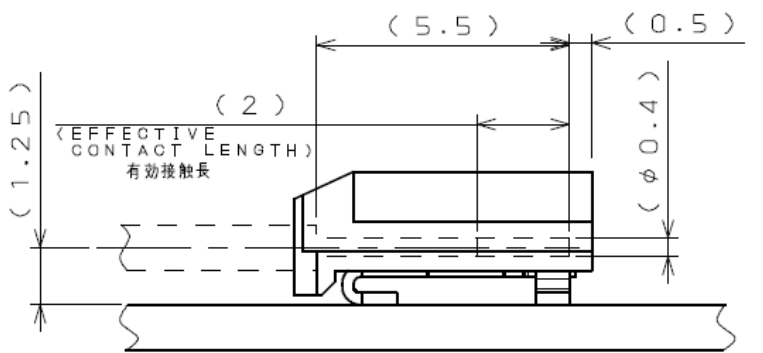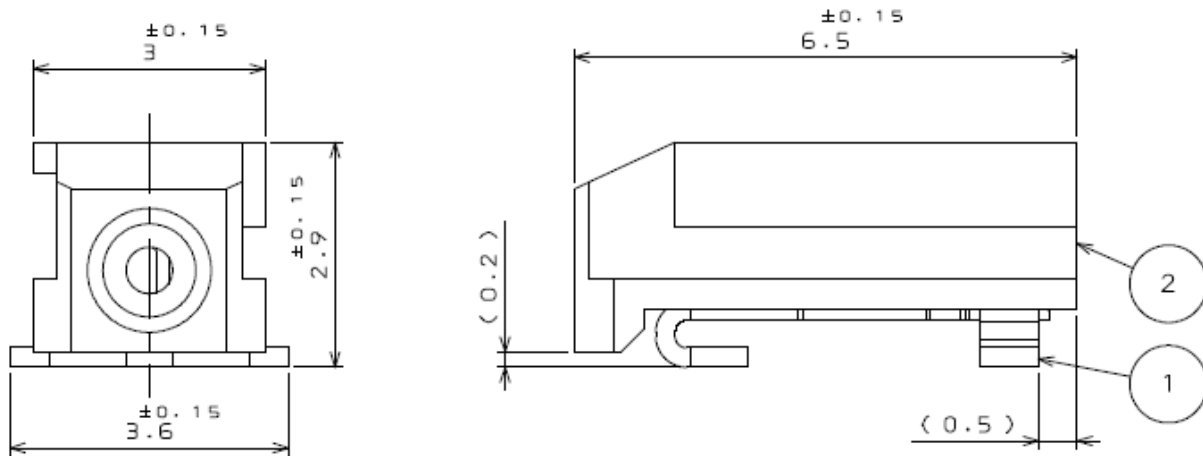
嵌合状態図 (参考)
MATED CONDITION(REF.)

1.15Max.

(5.5)
(4.5Min.)

(φ0.4~φ0.51)

CONDUCTOR
導体

INSULATION
絶縁体
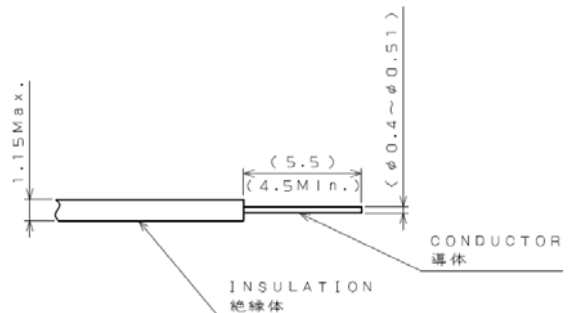
	DESCRIPTION	QTY.	MATERIAL	FINISH
2	INSULATOR インシュレータ	1	LCP	
1	CONTACT コンタクト	1	COPPER ALLOY 銅合金	LEAD-FREE TIN PLATING
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH

Part Number	ES3S001JF3R3300
Drawing No.	SJ111062

LISTED BY UL/cUL

SECT. C-C
(SCALE 5:1)

ENDING PORTION
終端部

BEGINNING PORTION(400mm MIN.)
リーダ部（400mm以上）

| W/O CONNECTOR 空部 (40mm MIN.) | W/H CONNECTOR コネクタ装着部 (3300 pcs) | W/O CONNECTOR 空部 (20mm MIN.) |

DIRECTION
引出し方向

φ380
(NOTE3)

(NOTE4)
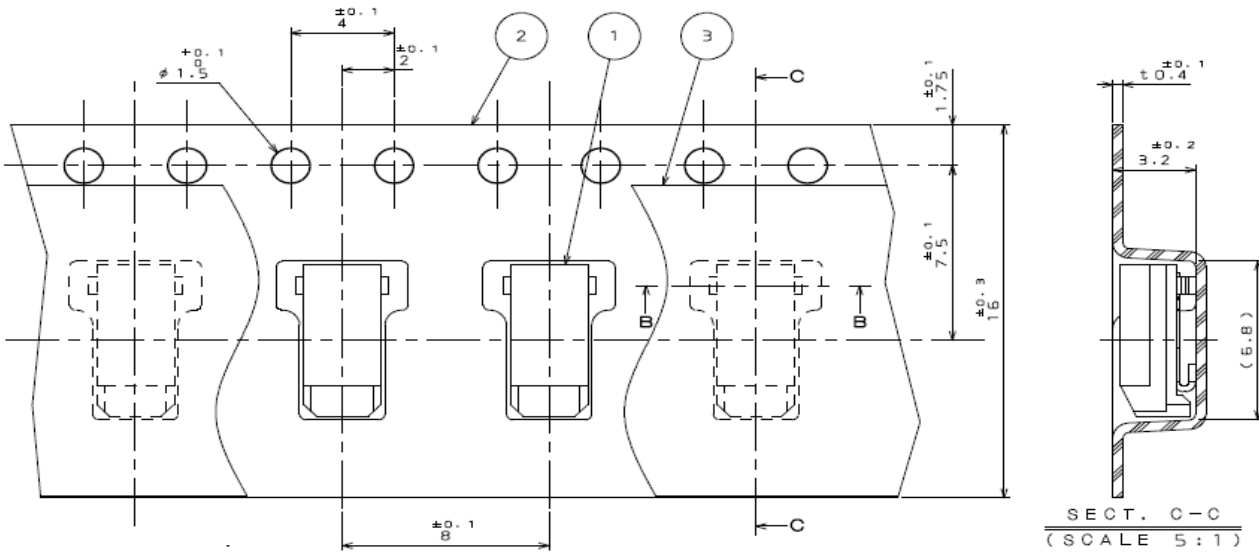
注3. コネクタ寸法は　SJ111054（ES3S001JF3）参照.
注4. 図示の位置にラベルを貼り、cULus認証品必要事項を表示する.

NO. 符号	DESCRIPTION 名称	QTY. 個数	MATERIAL 材料
4	REEL	1	POLYSTYRENE
3	COVER TAPE	1	POLYESTER
2	CARRIER TAPE	1	POLYSTYRENE
1	CONNECTOR	3300	—

参考適合基板寸法

APPLICABLE P.C.B. DIMENSION(REF.)

Technical Documents

	Technical Document No. (Contents of Document)
SJ Drawing	SJ111054 (ES3S001JF3, individual product) SJ111062 (ES3S001JF3, embossed tape packaging)
Specifications	JACS-10726
Handling Instructions	JAHL-10726

Japan Aviation Electronics Industry, Limited

Product Marketing Division
Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539
Phone: +81-3-3780-2882 FAX: +81-3-3780-2946

* The specifications in this brochure are subject to change without notice. Please contact JAE for information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics](#):
   [ES3S001JF3R3300](#)