
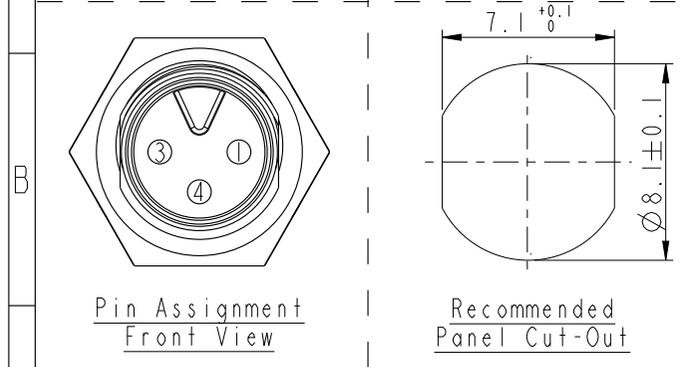


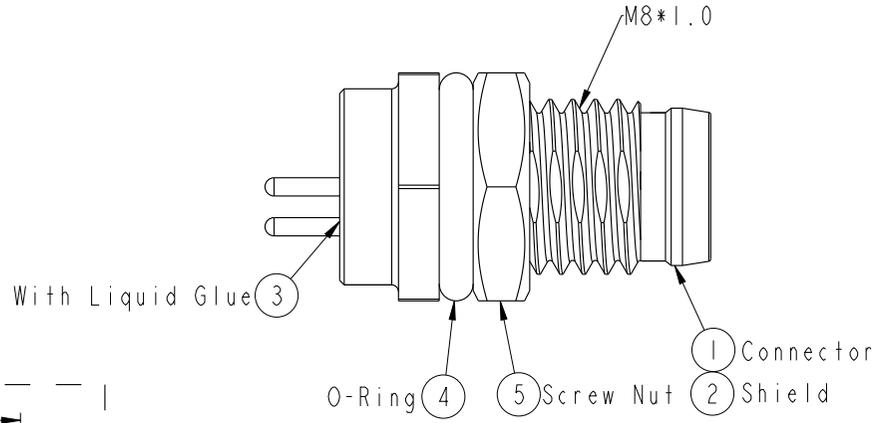
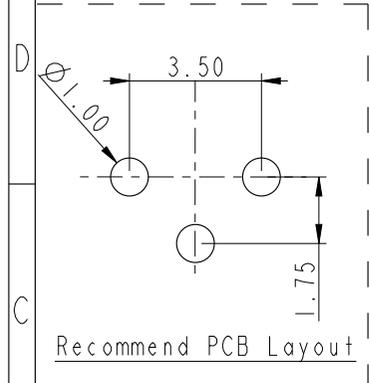


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

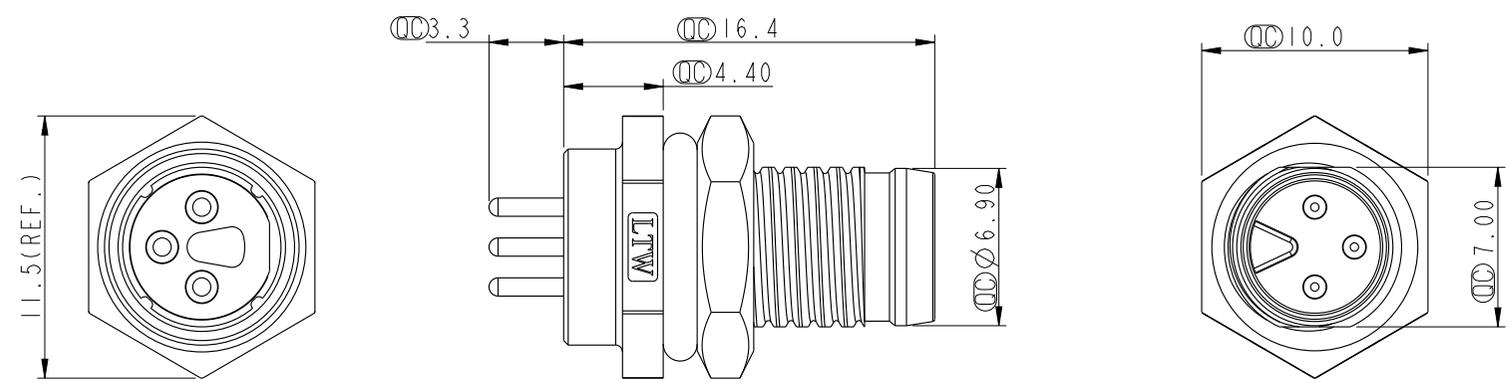

- Note:
- * ⌀ Important Dimension.
 - * Waterproof Rate: IP67.
 - * Housing: Nylon+GF, Black.
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Shield: Zinc Alloy, Nickel Plated.
 - * Screw Nut: Copper Alloy, Nickel Plated.
 - * O-Ring: EPDM, Black.
 - * For Panel Thickness Max 3.0mm.
 - * Nut Torque: 4~6 kgf.cm.

UNIT:mm		TITLE		ITEM NO	DRAWN BY	DATE
		M8 3Pin Panel M Conn. M Pin		8A-03PMMP-SF7001	Mila	2014-01-06
TOLERANCE		SCALE	SIZE	SHEET	OF	DATE
.X ±0.25		3:1	A4	1	1	2014-01-06
.XX ±0.1		REV.	WC-REV.	Inspection item		
.XXX ±0.05		A	A.3	Amphenol LTW 安費諾亮泰企業股份有限公司		
ANGLES ±1°				CUSTOMER	APPROVED BY	DATE
				ALTW	Jerry	2014-01-06